

LED QUICK-INSALL VAPOR TIGHT - Garage Lighting

PROJECT:

TYPE:

CATALOG #:

DATE:



NSF/ANSI 2 FOOD ZONE



FEATURES

- Polycarbonate Housing.
- Wiring knockouts are provided on back and end of housing.
- Polycarbonate lens , high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming .
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- Wet location.
- UL/cUL us listed.
- Ambient Temperature: -20 ~ 40 °C(-4° F to +104° F)



NEMA 4X

Item	Watt	CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
VGLVPX0252XCCTUNVWH	25W/20W/15W	35K-50K	130lm/w	3250lm	23.2	4.92	3.62
VGLVPX0404XCCTUNVWH	40W/30W/20W/	35K-50K	130lm/w	5200lm	47.2	4.92	3.62
VGLVPX0604XCCTUNVWH	60W/50W/40W	35K-50K	130lm/w	7800lm	47.2	4.92	3.62
VGLVPX0808XCCTUNVWH	80W/70W/60W	35K-50K	130lm/w	10400lm	94.5	4.92	3.97
VGLVPX1008XCCTUNVWH	100W/90W/80W	35K-50K	130lm/w	13000lm	94.5	4.92	3.97

* Please contact your VONN representative to order products that don't have order codes listed here or any info required.

* Due to continuing product improvements, VONN Lighting reserves the right to change the specifications without notice.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



LED QUICK-INSALL VAPOR TIGHT - Garage Lighting

PROJECT:

TYPE:

CATALOG #:


DATE:

ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Driver	Accessories
VGLVPX	LM-Milky lens	025:25w	22:2ft	B: Surface/ Suspended	30:3000K	D1:120/277V	A: No sensor&EM
	LD-Clear lens	040:40w	24:4ft		35:3500K	D2:347V	B: With Sensor
	LX-No lens	060:60w	24:4ft		40:4000K	D3:120-347V	C: With EM
	LW-Wire cage	080:80w	28:8ft		45:4500K	D4:480V	D: With Sensor&EM
					50:5000K	D5:347-480V	



PHOTOMETRIC

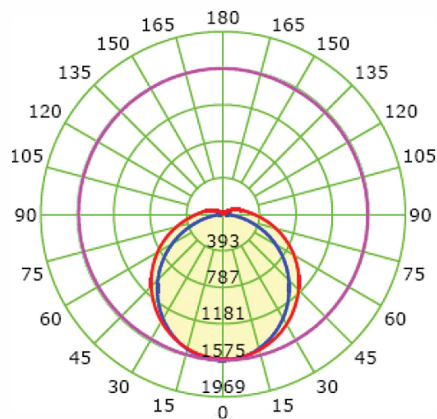

Luminaire	3500K
Input Voltage(VAC)	120-277
Power (W)	42.06
Delivered Lumen(Lm)	5341.5
Efficacy(Lm/W)	127
Beam Angle	H108.6 V13V127.3
Power Factor(PF)	>92
Color Rendering Index(CRI)	>82

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



LED QUICK-INSALL VAPOR TIGHT - Garage Lighting


PROJECT:

TYPE:

CATALOG #:


DATE:

■ Installation

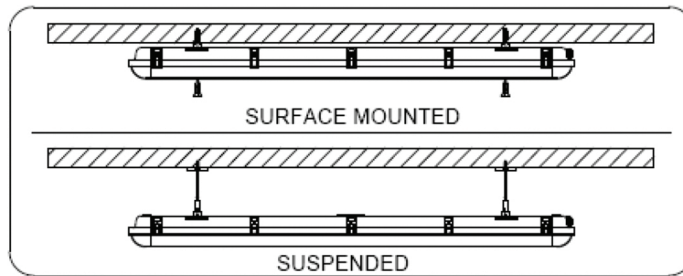



■ Disassembly ① -- ②

① Open the latch

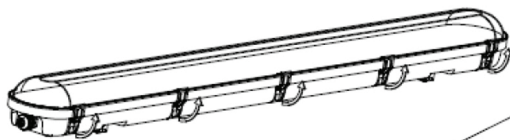

■ Assembly ② -- ①

Remove the up part ②

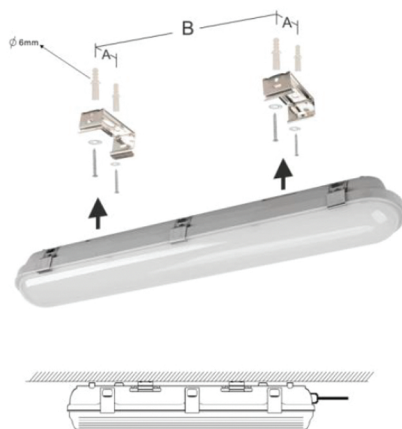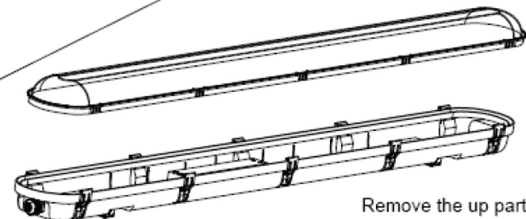

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



PROJECT:

TYPE:

CATALOG #:

DATE:

OPTIONAL ACCESSORIES

Sensor & Emergency kit



Power supply	120/277VAC 50/60Hz
Maximum load @ -40°F ~ +158°F (-40°C ~ +70°C)	Resistive/Tungsten - 600W@120V Ballast Electronic (LED) - 800VA@120V/1200VA@277V
HF System	5.8GHz CW
Dim control output	0-10V, max. 25mA sinking current
Detection radius/angle	Max 26ft.(8m) /360°
Mounting height	Max 20ft
Humidity	Max. 95% RH
Temperature	-40°F ~ +158°F (-40°C ~ +70°C)

Microwave Motion Sensor BRI810-B-M4



BLD-CM20E-4800800 Lithium Battery

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2023

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

