

## High Efficacy CCT Tunable LED Strip - Garage Lighting

PROJECT:

TYPE:

CATALOG #:

DATE:



### FEATURES

- Heavy Gauge Steel Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- Polycarbonate lens and end cap, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- Damp location.
- UL/cUL us listed.
- DLC pending & CCT tunable version optional
- Ambient Temperature:-30 ~ 40 °C(-22° F to +104° F)
- Damp Location Rated



Item	Watts	3 CCT	Efficacy	Lumens	Dimension(L*W*H):Inch		
VGLX0202XCCTUNVWH	20W	35K 40K 50K	115lm/w	2,300lm	23.4	2.36	3.34
VGLX0324XCCTUNVWH	32W	35K 40K 50K	115lm/w	3,450lm	45.86	2.36	3.34
VGLX0506XCCTUNVWH	50W	35K 40K 50K	115lm/w	5,750lm	70.12	2.36	3.34
VGLX0638XCCTUNVWH	63W	35K 40K 50K	115lm/w	7,245lm	90.75	2.36	3.34

\* Please contact your VONN representative to order products that don't have order codes listed here or any info required.

\* Due to continuing product improvements, VONN Lighting reserves the right to change the specifications without notice.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

**VONN, LLC.**

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



## High Efficacy CCT Tunable LED Strip - Garage Lighting

PROJECT:

TYPE:

CATALOG #:

DATE:

## ORDERING

Model	Color of Lens	Watts	Length	Mounting Method	CCT	Driver	Accessories
VGL453	LM-Milky lens	020: 20W	12-2ft	B: Surface/	30:3000K	D1:120/277V	A: No sensor&EM
	LD-Clear lens	032: 32W	14-4ft	Suspended	35:3500K	D2:347V	B: With Sensor
	LX-No lens	050: 50W	16-6ft	W: Wall	40:4000K	D3:120-347V	C: With EM
	LW-Wire cage	063: 63W	18-8ft	R: Recessed	45:4500K	D4:480V	D: With
					50:5000K	D5:347-480V	Sensor&EM
					VK-CCT tunable		


## CCT TUNABLE



3000K/3500K-Warm White


4000K-Nature White

5000K-Cold White



## PHOTOMETRIC

Luminous Intensity Distribution Curve

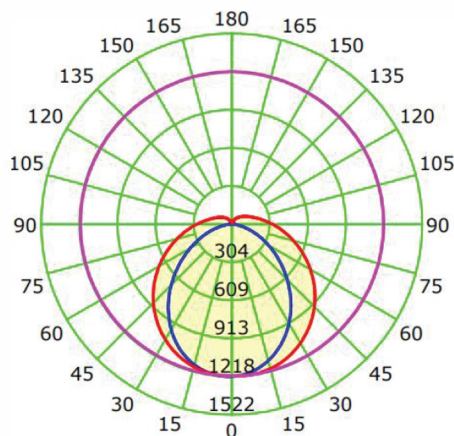

Luminaire	4000K
Input Voltage(VAC)	120-277
Power (W)	30.46
Delivered Lumen(Lm)	4304.5
Efficacy(Lm/W)	135
Beam Angle	H94.6 V132.5
Power Factor(PF)	>92
Color Rendering Index(CRI)	>82

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2023


**VONN, LLC.**

3323 NE 163rd St. PH-706

North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



## High Efficacy CCT Tunable LED Strip - Garage Lighting

PROJECT:




TYPE:

CATALOG #:


DATE:

### INSTALLATION

Note: Quick Surface Mount within 30seconds

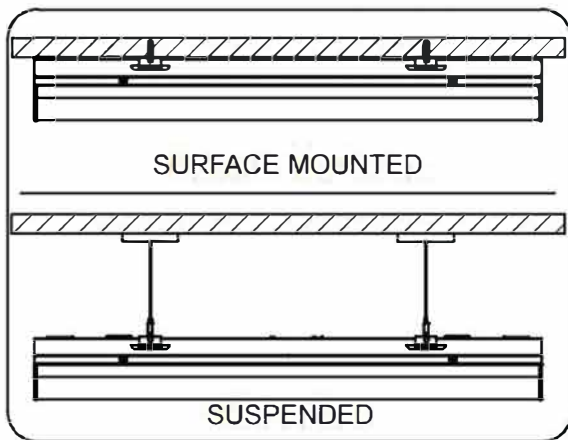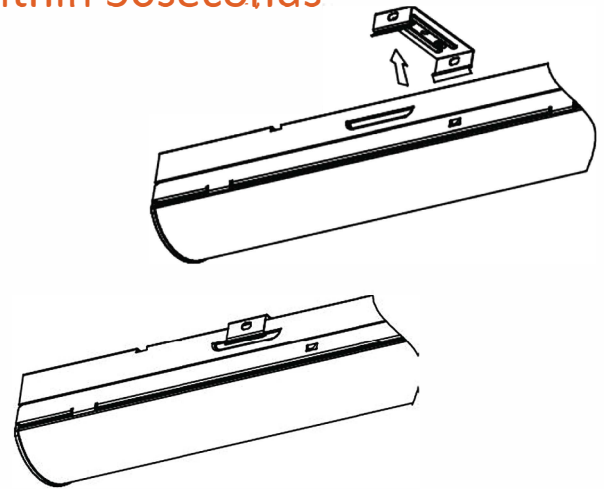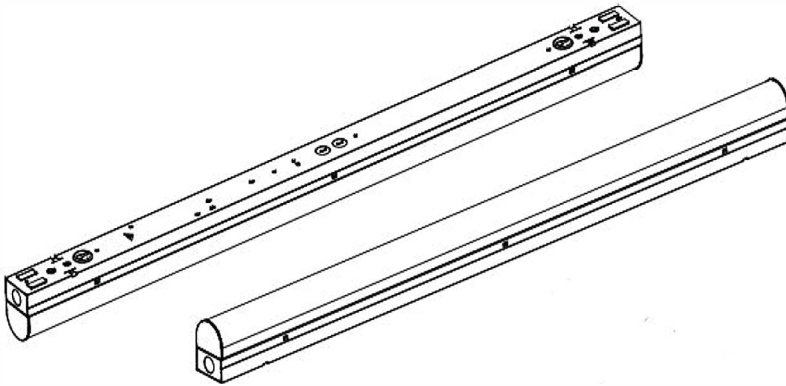

### Installation Dimension

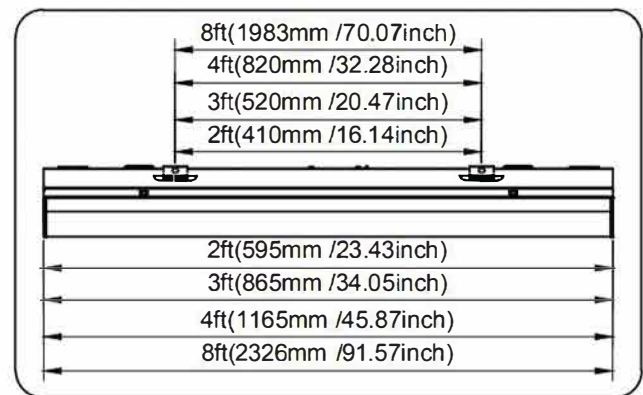

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

**VONN, LLC.**

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



PROJECT:


TYPE:

CATALOG #:

DATE:

### OPTIONAL ACCESSORIES

#### 1. Sensor & Emergency kit



Internal Microwave  
Motion Sensor BRI810-  
B-M4





(No Shadow)



BLD-CM20E-4800800  
Lithium Battery

#### 2. Connection plate

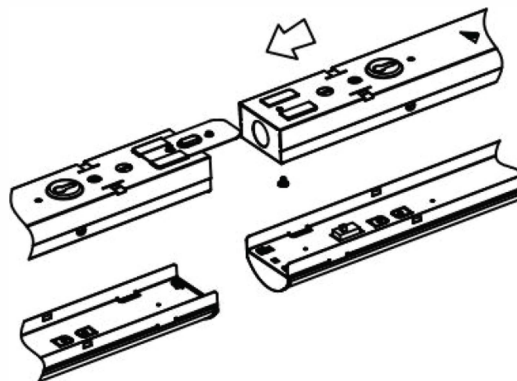

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2023

**VONN, LLC.**

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.





## High Efficacy CCT Tunable LED Strip - Garage Lighting

PROJECT:

TYPE:

CATALOG #:


DATE:

### OPTIONAL ACCESSORIES

#### 3. Junction box cover





Note: If this is needed please tell your representative as standard fixture will not have mounting hole for this cover




This is not working for Canadian Market

#### 4. Reflector

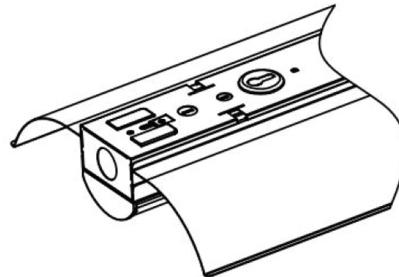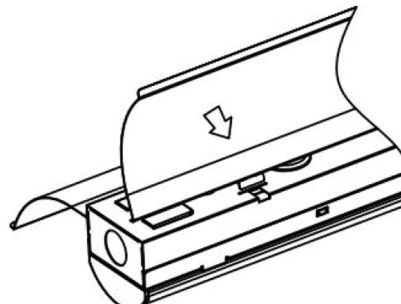

#### 5. Wire cage

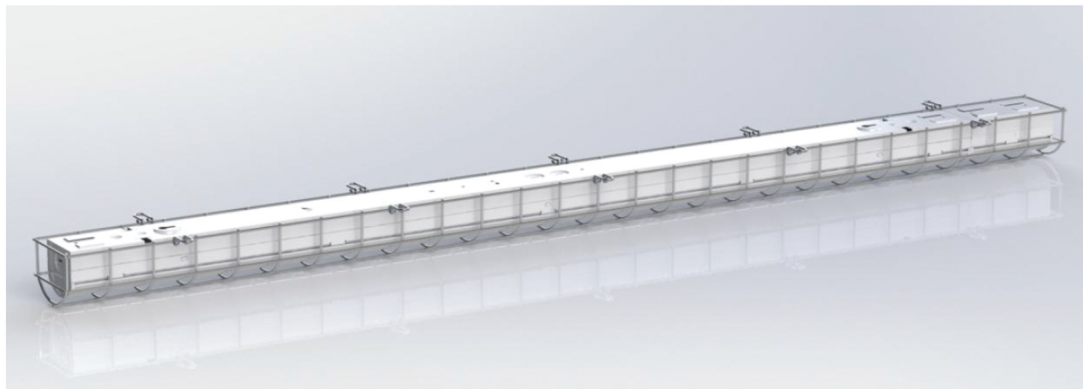

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2023

**VONN, LLC.**

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

