

VELLA 4" HOTEL DOWNLIGHT

VM070-VF71RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:

DESCRIPTION

The VELLA 4" Hotel series is not only an aesthetically designed downlight but also delivers high-quality illumination, thanks to a combination of a precision light beam lens and a secondary reflector. These luminaires blend seamlessly into the ceiling layout, embodying the philosophy of "light instead of luminaires." With a super modular design available in both round and square shapes, as well as adjustable and fixed options in various wattages, the VELLA Hotel series is an excellent choice for creating a unified lighting experience in any environment.

FEATURES

- Elegant & compact in its style, versatile in its use.
- Precise light control, 15°, 24°, 38°, 55° beam lens options.
- Interchangeable different color secondary reflectors for anti-glare and decorative function.
- Super modular design, replacing LED module, trims, beam lens, honeycomb filter and secondary reflectors without any needs for tools.
- 355° rotation and 30° tilt.
- Anti-glare accessories provide maximum visual comfort.
- Service the LED optics and Driver from above the ceiling.




Round



Square

SPECIFICATION

	VM070	
WATTAGE	20 W	25 W
LUMEN OUTPUT	1860lm	2182lm
BEAM OPTICS	Narrow Spot: 15°, Spot: 24°, Flood: 38°, Wide Flood: 55°	
COLOR TEMP.	Static White: 2700K, 3000K, 3500K, 4000K Dim to Warm: 2000K - 3000K	
COLOR QUALITY	80+/90+, 3-step SDCM	
INPUT WATTAGE	20 W	25 W
INPUT VOLTAGE	120/277V input, 50/60Hz	
POWER FACTOR	Greater than 0.9	
DIMMING TYPE	Triac dimming & 0-10V dimming range: 1%-100%	
CEILING THICKNESS	 3/64" - 25/32" (1mm-20mm) Spring clip	
INSTALLATION	New Construction, Remodel, IC Rated Housing	
LISTINGS	ETL Listed to US and Canadian standards for damp locations. (IC) ETL listed for direct contact w/insulation.	
WARRANTY	5 year limited warranty	
AMBIENT OPERATING TEMPERATURE	-20°C to 40°C	
SYSTEM RATING	80% of initial lumens at 50000 hours (L80)	

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St, PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 4" HOTEL DOWNLIGHT

VM070-VF71RA01

By VONN Lighting



PROJECT:

TYPE:

CATALOG#:

DATE:

ORDERING INFORMATION

VM070	VF	7	1	-	-	-	-	-	-	-	-
Led Module	Trim	Dimensions of trim	Application	Trim Shape	Trim Style	Flangeless Trim	Safety Standard	Voltage	Lumen Output	Dimming Methods	Including Housing
VM070	VF	7 Nominal size: 70mm	1 Hotel	RA Round adjustable	01 Standard	F Flangeless Trim	A American standard	277 120-277V	L08 800lm	V 0-10V	C New Construction
				RF Round fixed				120 100-120V	L12 1200lm	T Triac	R Remodel
				SA Square adjustable						X 0-10V/Triac	H Housing

ACCESSORIES (TO BE ORDERED SEPARATELY)

FOR INSTALLATION CONSULT THE INSTRUCTION SHEET

OPTICAL ACCESSORY

☐ **HONEYCOMB FILTER**
VM070-H



☐ **SOFT LENS**
VM070-L



SECONDARY REFLECTOR COLOR

☐ **BLACK**
VF71RA-SB
VF71RF-SB
VF71SA-SB



☐ **BRIGHT SILVER**
VF71RA-SS
VF71RF-SS
VF71SA-SS



☐ **MATT SILVER**
VF71RA-SM
VF71RF-SM
VF71SA-SM



☐ **MATT WHITE**
VF71RA-SW
VF71RF-SW
VF71SA-SW



LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.95
3000K	1.00
3500K	1.03
4000K	1.06

CRI	MULTIPLIER
80+	1.23
90+	1.00

STANDARD TRIM	MULTIPLIER
VF71RA01 (Round adjustable)	1.00
VF71RF01 (Round fixed)	0.99
VF71SA01 (Square adjustable)	0.96

Applying Lumen Multipliers to Calculate Delivered Lumens

Base Fixture Delivered Lumens (from PHOTOMETRIC DATA)	x	CCT Multiplier	x	CRI Multiplier	x	TRIM Multiplier	=	Delivered Lumens for Desired Fixture
STANDARD TRIM Example: EM060-EF61RF01 3500K 80+								
1712.2 lm	x	1.03	x	1.23	x	0.99	=	2147.2 lm

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 4" HOTEL DOWNLIGHT

VM070-VF71RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:


DATE:

PHOTOMETRIC DATA (NON-DIMMING)


CCT (K)	CRI	LOAD (W)	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)
3000K	90	20W	15°	1712	85	11692
			24°	1860	93	8753
			38°	1835	92	5046
			55°	1839	92	2485
		25W	15°	2002	83	13687
			24°	2182	90	10205
			38°	2116	88	5796
			55°	2114	88	2903

Above test data is based on **Round Adjustable** trim with 3000K 90CRI LED.

VM070-VF71RA01 20W

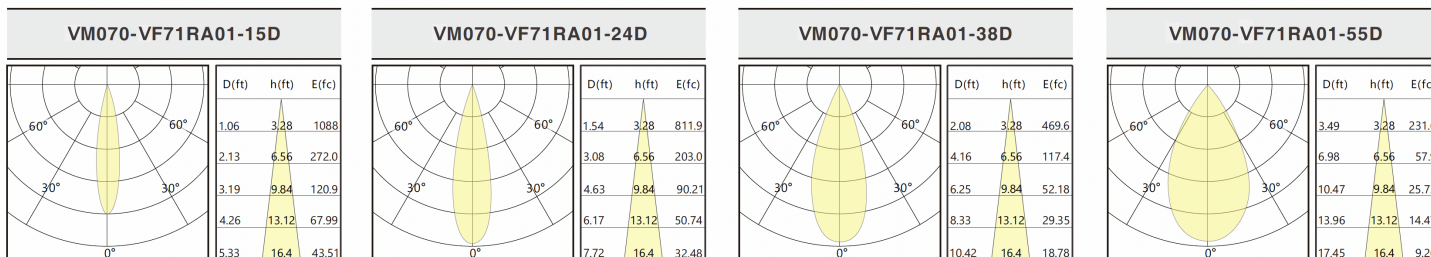

VM070-VF71RA01 25W

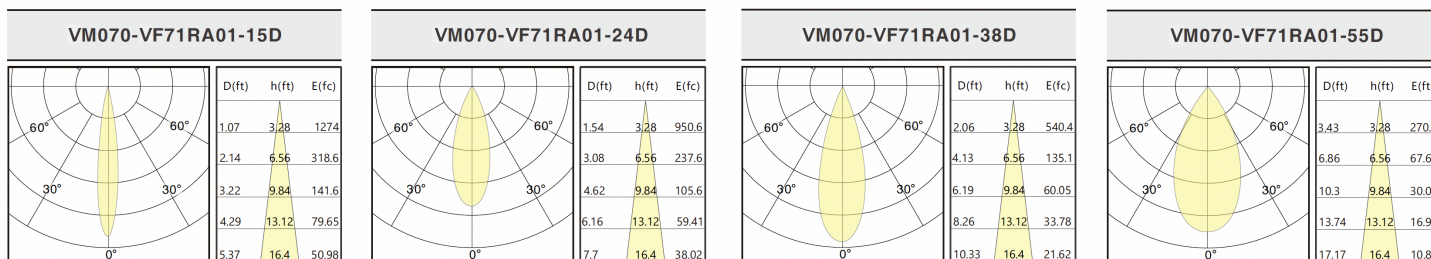

Above test data is based on **Round Adjustable** trim with 3000K 90CRI LED.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2025

VELLA 4" HOTEL DOWNLIGHT

VM070-VF71RA01

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:


DATE:

DIMENSION


LED Module



VM070




Trim For Hotel Series

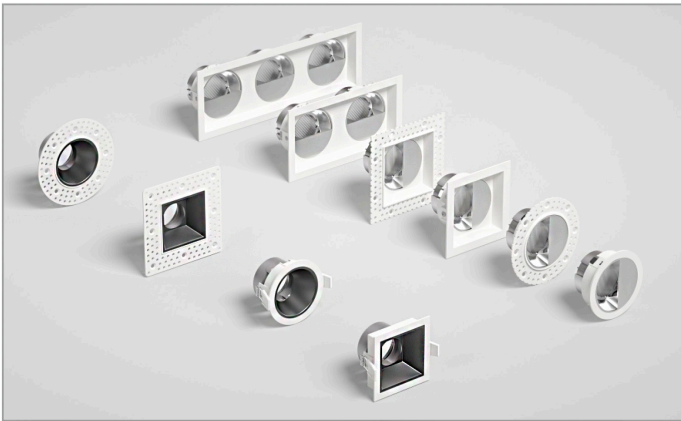


Round Adjustable

VF71RA01




Round Adjustable
Flangeless

VF71RA01T




Round Fixed

VF71RF01




Round Fixed
Flangeless

VF71RF01T



Square Adjustable

VF71SA01



Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2025

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VELLA 4" HOTEL DOWNLIGHT

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:

INSTALLATION




REMODEL


INSTALLATION

1. Direct connection with installed housing.
2. Operation temperature: -20°C - 40°C

DIMENSIONS FOR REMODEL MOUNTED DRIVER

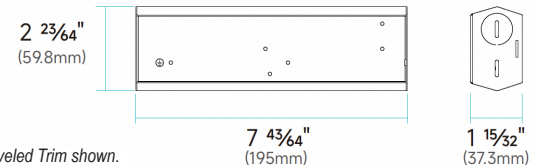

Note: Total height varies depending on trim, Beveled Trim shown.
Minimum height: 5 $\frac{23}{64}$ " (136mm)
Maximum height: 5 $\frac{17}{32}$ " (140.5mm)

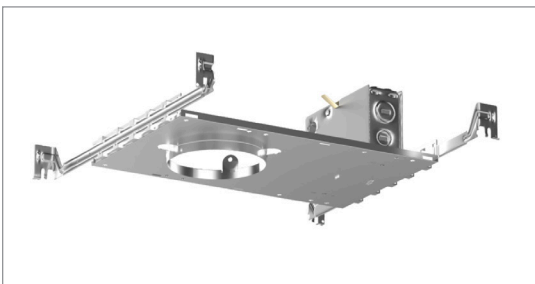


NEW CONSTRUCTION

INSTALLATION

1. Non-IC rated housings must be kept at a minimum of 3" away from insulation.
2. Fixture includes adjustable bar hangers (14"-25") for wood joist or t-bar ceiling installations.
3. Bar hangers can be installed in either direction.
4. Operation temperature: -20°C - 40°C.

DIMENSIONS

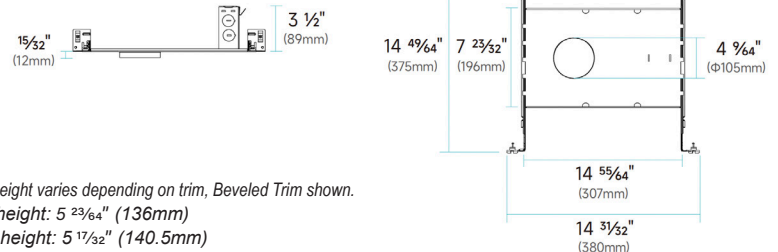

Note: Total height varies depending on trim, Beveled Trim shown.
Minimum height: 5 $\frac{23}{64}$ " (136mm)
Maximum height: 5 $\frac{17}{32}$ " (140.5mm)




IC RATED HOUSING

INSTALLATION

1. ETL Listed for direct contact with insulation.
2. Fixture includes adjustable bar hangers (14"-25") for wood joist or t-bar ceiling installations.
3. Bar hangers can be installed in either direction.
4. Operation temperature: -20°C - 40°C.

DIMENSIONS

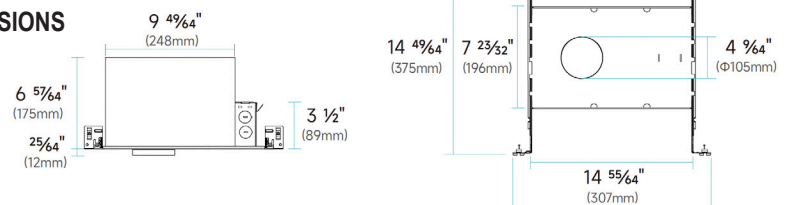

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2025