

VEGA NARROW BEAM PENDANT LIGHT

VNTLO010-03

By VONN Lighting



PROJECT:

TYPE:

CATALOG#:

DATE:




VNTLO010-03

DESCRIPTION

VEGA Narrow Beam 2" 10W ETL Certified Monopoint Pendant Track Lighting with 6 Degree Beam Angle.

By simply adding optional optical accessories, the beam shape can be adjusted to square, rectangular, or oval, allowing you to create a unique atmosphere. The adjustable head provides precise positioning with 360°+ horizontal rotation and 90° vertical tilt, ensuring light is directed exactly where it is needed. The integrated driver offers a clean, uncluttered appearance, preventing ceilings from being crowded with external drivers aimed in different directions.

DIMENSIONS

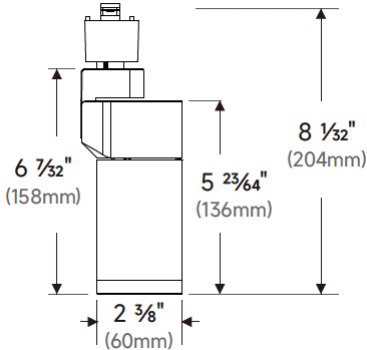

FEATURES

- Stylish, compact design with integrated driver
- Very narrow 6° beam with high-quality light distribution
- Optional optical accessories allow the beam shape to be changed to square, rectangular, or linear
- Patented joints hold the light securely in any position without malfunction
- 360°+ rotation without dead angles and 90° vertical adjustment
- Use the VEGA family to create a unified look within any environment


SPECIFICATION

	VNTLO010-03	
WATTAGE	10W	
LUMEN OUTPUT	626lm	
BEAM ANGLE	(Narrow Spot) 6°	
CCT	2700K, 3000K, 3500K, 4000K	
CRI	80+, 90+, 95+ (optional)	
INPUT WATTAGE	10W	
INPUT VOLTAGE	120VAC Dimming, 50Hz/60Hz	
DIMMING TYPE	Optional leading (Triac) and trailing edge (ELV) for 120V only	
MOUNTING	Track-Mounted: 1. Single-circuit: Halo, Juno, Lightolier	Wall-Mounted
	2. - 2-circuit: TEK, HTEK	Pendant
	3. - 3-circuit: Global	Surface-Mounted
FINISH	White, Black, Silver	
WEIGHT	1.10lbs(0.50kg)	
LISTINGS	cETLus Listed to UL and CSA Standards; Suitable for Dry Locations only	
WARRANTY	5 year limited warranty	
SYSTEM RATING	80% of initial lumens at 50000 hours (L80)	

Approximate lumen output based on 3000K performance, see photometric test results for additional information.

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



VEGA NARROW BEAM PENDANT LIGHT

VNTLO010-03

By VONN Lighting

VONN

PROJECT:


TYPE:

CATALOG#:

DATE:

OPTICAL ACCESSORIES (TO BE ORDERED SEPARATELY.

FOR INSTALLATION, CONSULT THE INSTALLATION GUIDE.)

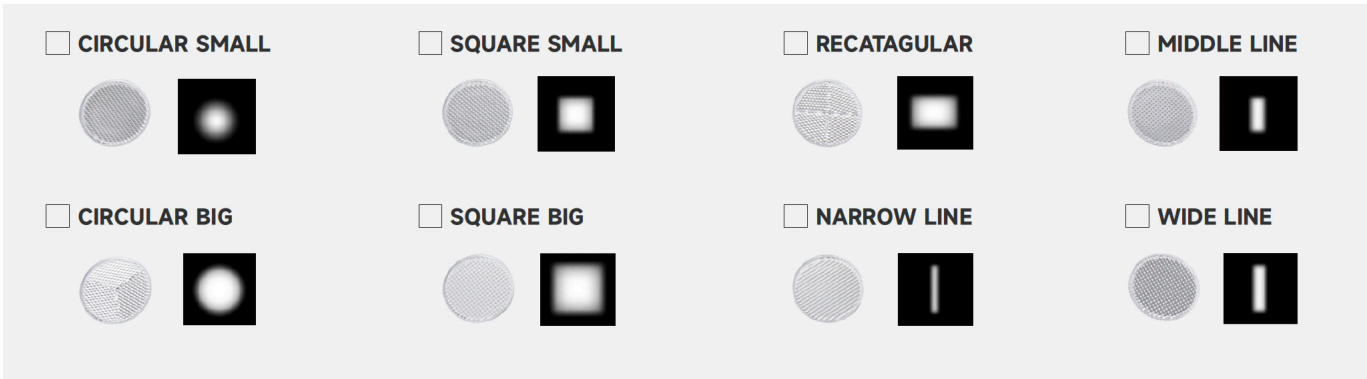

LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	1.00
3000K	1.00
3500K	1.07
4000K	1.07

CRI	MULTIPLIER
80+	1.24
90+	1.00

Applying Lumen Multipliers to Calculate Delivered Lumens

Base Fixture Delivered Lumens (from PHOTOMETRIC DATA)	X	CCT Multiplier	X	CRI Multiplier	=	Delivered Lumens for Desired Fixture
Example: VN-TLO010-01 3500K 80+						
626 lm	x	1.07	x	1.24	=	830.5 lm

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)


***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St, PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



VEGA NARROW BEAM PENDANT LIGHT

VNTLO010-03

By VONN Lighting



PROJECT:

TYPE:


CATALOG#:

DATE:

PHOTOMETRIC DATA

CCT (K)	CRI	LOAD (W)	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/w)	MAX CANDELA (cd)
3000K	90	10W	6°	626	60	15384

NARROW BEAM-10W

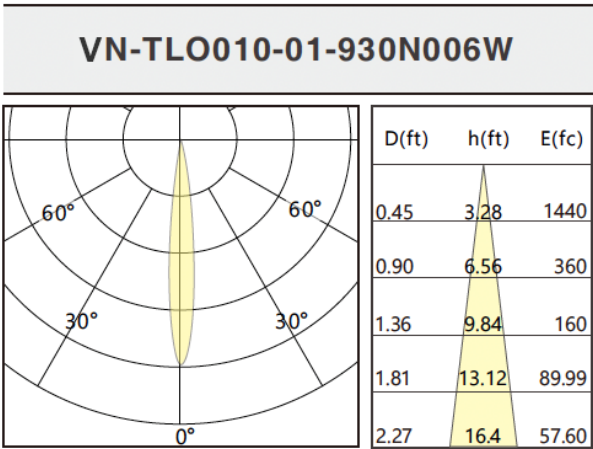

Above test data is based on 3000K 90CRI LED

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)



VEGA NARROW BEAM PENDANT LIGHT

VNTLO010-03

By VONN Lighting

VONN


PROJECT:

TYPE:

CATALOG#:


DATE:

EXCELLENT MODULAR COMBINATION CONCEPT

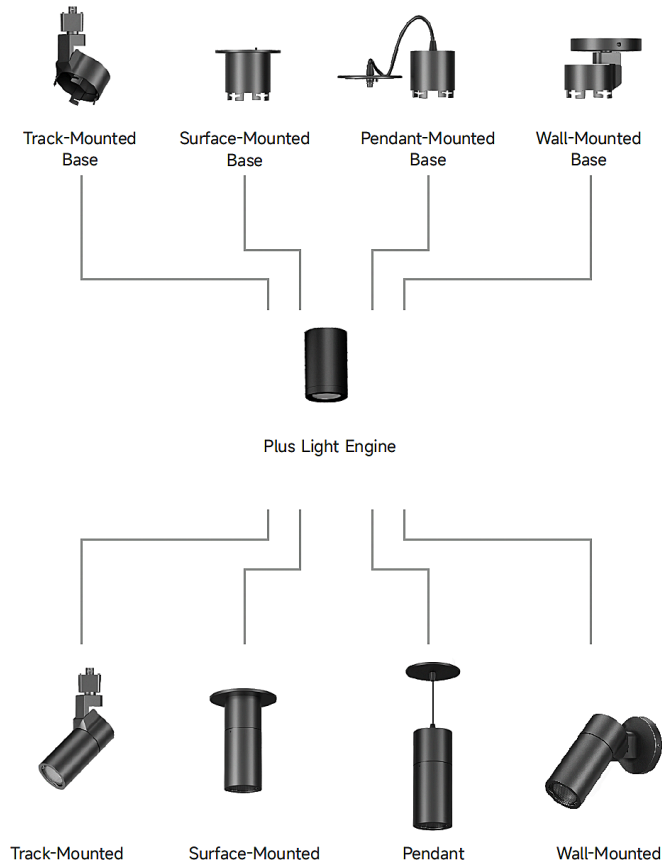


Surface-Mounted

VN-TLO010-02



Pendant

VN-TLO010-03

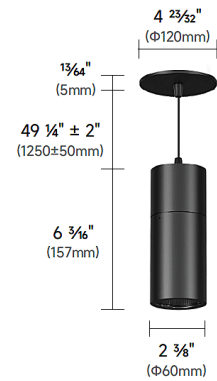

Wall-Mounted

VN-TLO010-04



Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024