

OPUS WALL WASHER LINEAR

By VONN Lighting

VOM40GW1200



PROJECT:


TYPE:

CATALOG#:

DATE:



DIMENSIONS

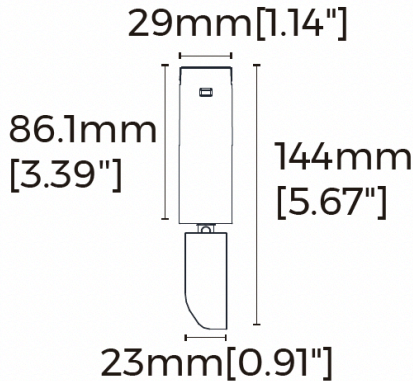

DESCRIPTION

- Wall washer
- Black
- Length: 1200mm
- 20W
- CCT: 2700K/3000K/4000K
- Ra90
- Non-dimming

FEATURES

- Installation: Ceiling
- Material: AL6063-T5
- Coating: Black/White (Customizable) optional
- Dimming method: Non/DALI-2/CASAMBI
- Input voltage: DC48V
- SDCM: <3 Step (ANSI)
- CRI: 90
- CCT: 2700/3000/4000K optional
- Beam angle: 60°x25°x73°
- Application: Indoor
- IP grade: IP20
- Warranty: 5 years
- Certification: CE, UKCA, ETL, ROHS, Reach


SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	CCT	LUMENS
VOM40GW600	604mm [1.98']	DC48V	10W	>90	2700K	822 [415LM/ft]
					3000K	846 [427LM/ft]
					4000K	900 [455LM/ft]
VOM40GW1200	1204mm [3.95']		20W		2700K	1644 [415LM/ft]
					3000K	1692 [427LM/ft]
					4000K	1800 [455LM/ft]

- Note:
1. The above parameters were tested based on Ra90, 4000K, light source;
 2. luminous flux is allowed to have a ±10% error range;
 3. The above parameters are typical values.

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



OPUS WALL WASHER LINEAR

By VONN Lighting

VOM40GW1200





PROJECT:

TYPE:


CATALOG#:

DATE:

PHOTOMETRICS

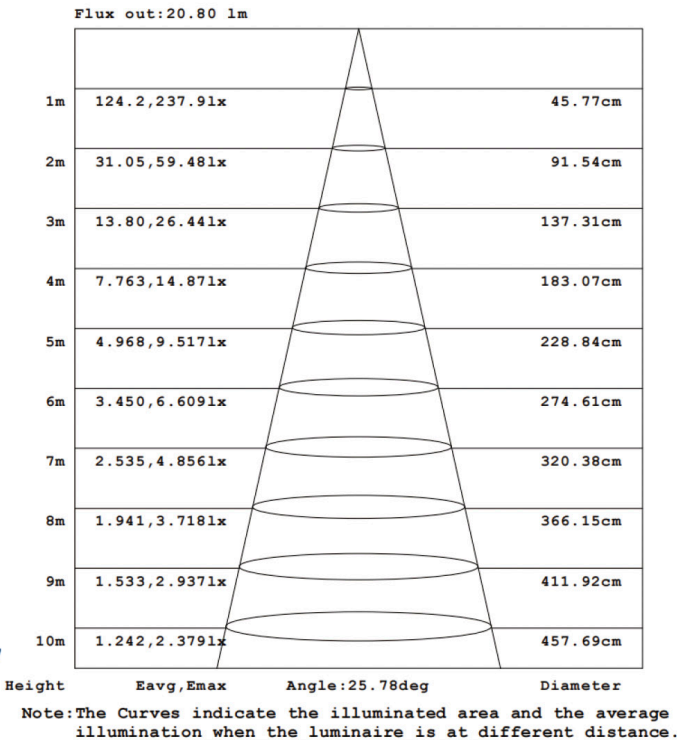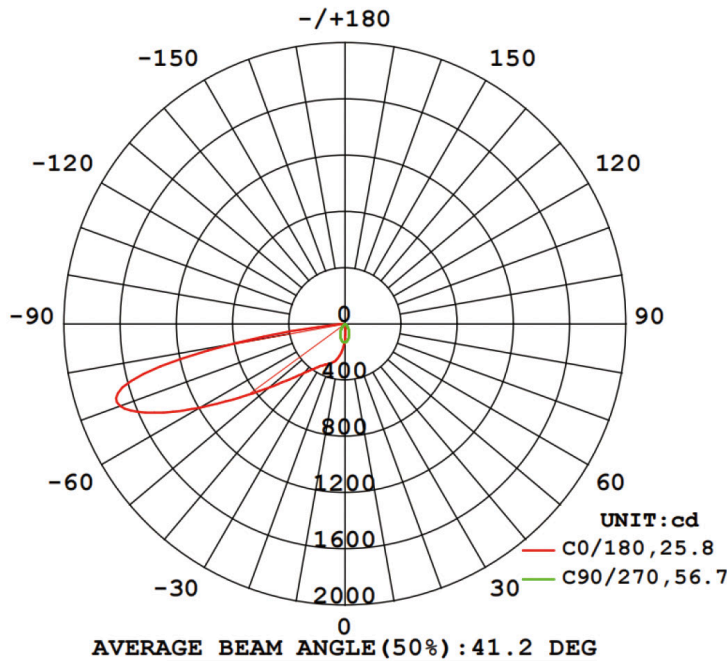


DIMENSIONS

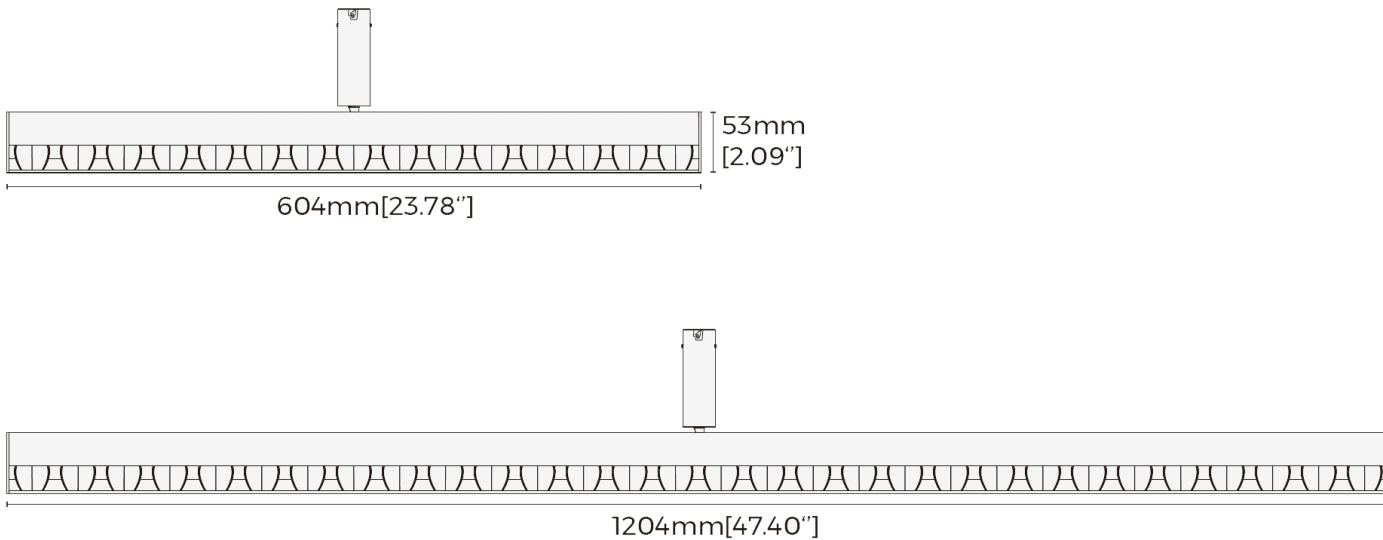

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



DATE:

Picture	Section size	Name	Description	Model	Note
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: φ42-45mm Rated Power:150W Rated Current:3A Certification:CE Maximum load: 8Kg/Lamp	VRA-HR40(N)	
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: φ55mm Rated Power:150W Rated Current:3A Certification:CE Maximum load: 1Kg/Lamp	VRA-HE40	
		Quick connector	Material:PA6 Size:L38*W9.4*H10.5mm [Inch Size: L1.5"*W0.37"*H0.41"] Applicable wires: solid wire:0.5-4mm² stranded wire:0.5-2.5mm² Rated Voltage:250V/600V Rated Current:32A Certification:CE	VTB-02	
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value:≥0.9 Output voltage:48V Output current:2.1A Power:0-100W Efficiency:0.9	VBN-V48-100P	
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value:≥0.95 Output voltage:48V Output current:3.125A Power:0-150W Efficiency:0.9	VBN-V48-150P	Power supply Accessories
		Power supply	Dimming mode: Non-dimming Size:400*40*22mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value:≥0.95 Output voltage:48V Output current:5.12A Power:0-250W Efficiency:0.9	VBN-V48-250P	
		CASAMBI controller	Dimming mode: CASAMBI Size :180*42*25mm [Inch Size:7.09*1.65*0.98"] Input voltage :24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices:≤64 Control groups:≤8 Certification:CE,UKCA	1200ENI612-CAS -0-0000003	Controller should be used with DALI dimming modules.

