

OPUS ASYMMETRIC LINEAR By VONN Lighting

VOM40LA600



PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

- Asymmetric
- Black
- 600mm
- 12W
- 2700K/3000K/4000K
- Ra90
- Non-dimming

FEATURES

- Installation: Ceiling
- Material: AL6063-T5
- Coating: Black/White(Customizable) optional
- Dimming method: Non/DALI-2/CASAMBI
- Input voltage: DC48V
- SDCM: <3 Step (ANSI)
- CRI: 90
- CCT: 2700/3000/4000K optional
- Beam angle: 90°x45°x15°
- Application: Indoor
- IP grade: IP20
- Warranty: 5 years
- Certification: CE, UKCA, ETL, ROHS, Reach

DIMENSIONS

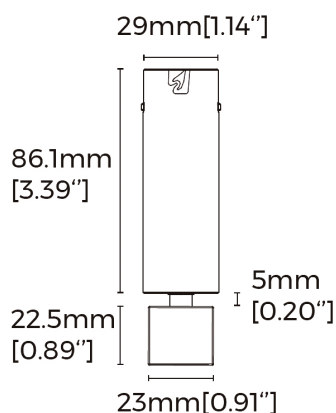

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	CCT	LUMENS
VOM40LA600	604mm [1.98']	DC48V	12W	>90	2700K	1092 [552LM/ft]
					3000K	1128 [570LM/ft]
					4000K	1200 [606LM/ft]
VOM40LA900	904mm [2.97']		18W		2700K	1638 [552LM/ft]
					3000K	1692 [570LM/ft]
					4000K	1800 [606LM/ft]
VOM40LA1200	1204mm [3.95']		24W		2700K	2184 [552LM/ft]
					3000K	2256 [570LM/ft]
					4000K	2400 [606LM/ft]

Note:

1. The above parameters were tested based on Ra90, 4000K, light source;
2. luminous flux is allowed to have a $\pm 10\%$ error range;
3. The above parameters are typical values.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St, PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.




PROJECT:

TYPE:


CATALOG#:

DATE:

PHOTOMETRICS

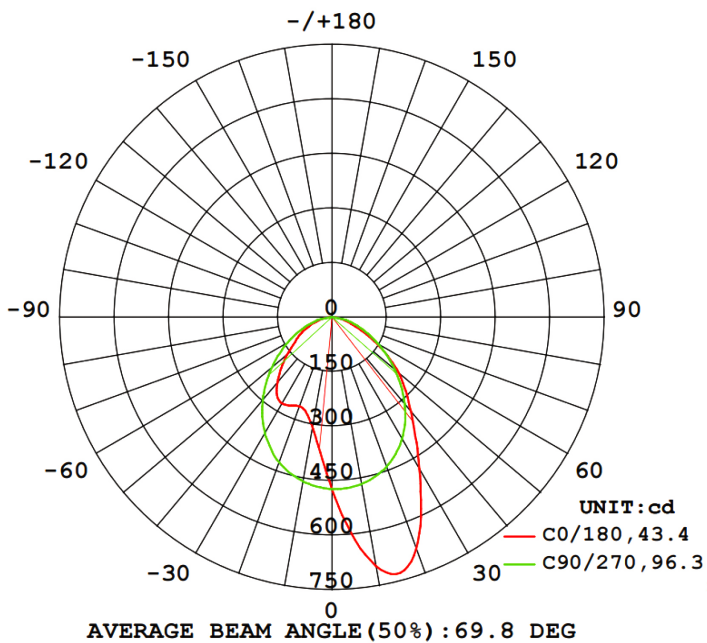


luminous intensity
distribution diagram

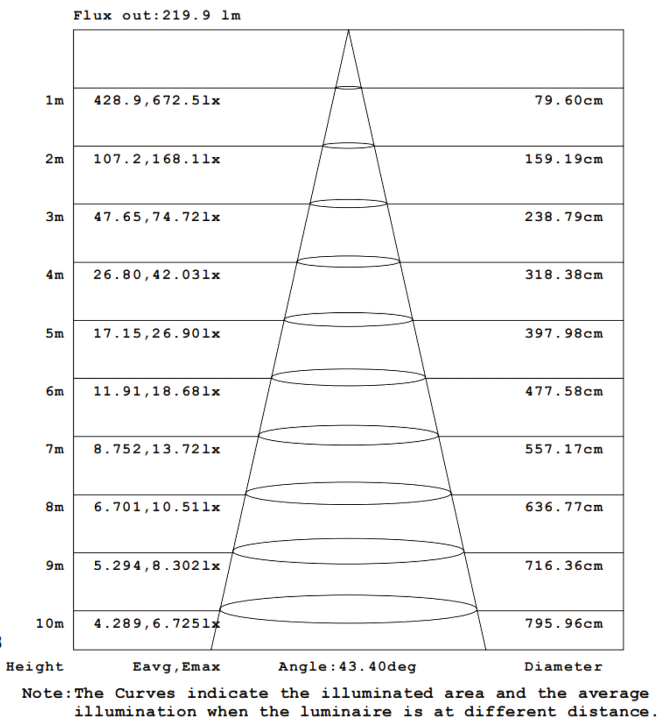

AAI Figure

DIMENSIONS

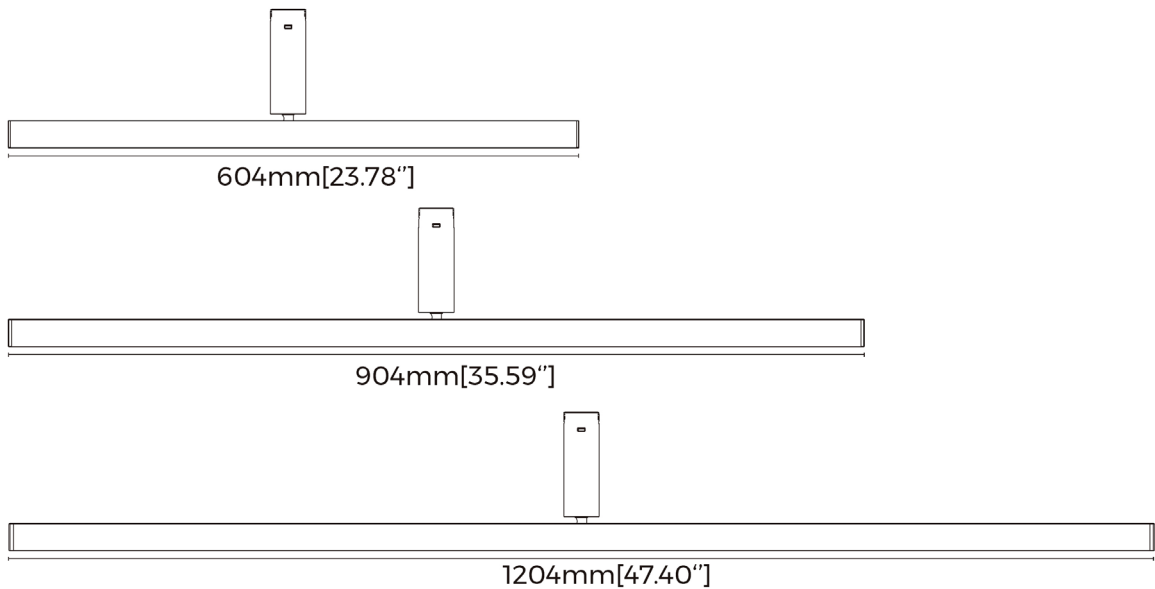

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



OPUS ASYMMETRIC LINEAR By VONN Lighting

VOM40LA600



PROJECT:

TYPE:

CATALOG#:

DATE:

PRODUCT ACCESSORIES INFORMATION

Picture	Section size	Name	Description	Model	Note
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black/White Open Size: $\phi 42-45\text{mm}$ Rated Power:150W Rated Current:3A Maximum load: 8Kg/Lamp	VRA-HR40(N)	
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black/White Open Size: $\phi 55\text{mm}$ Rated Power:150W Rated Current:3A Maximum load: 1Kg/Lamp	VRA-HE40	
		Quick connector	Material:PA6 Size:L38*W9.4*H10.5mm [Inch Size: L1.5"*W0.37"*H0.41"] Applicable wires: solid wire:0.5-4mm ² stranded wire:0.5-2.5mm ² Rated Voltage:250V/600V Rated Current:32A	VTB-02	
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.9 Output voltage:48V Output current:2.1A Power:0-100W Efficiency:0.9	VBN-V48-100P	Power supply Accessories
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.95 Output voltage:48V Output current:3.125A Power:0-150W Efficiency:0.9	VBN-V48-150P	
		Power supply	Dimming mode: Non-dimming Size:400*40*22mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.95 Output voltage:48V Output current:5.12A Power:0-250W Efficiency:0.9	VBN-V48-250P	
		CASAMBI controller	Dimming mode: CASAMBI Size:180*42*25mm [Inch Size:7.09"*1.65"*0.98"] Input voltage:24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices: ≤ 64 Control groups: ≤ 8	V1200EN1612-CAS -0-0000003	Controller should be used with DALI dimming modules.

Note:

1. Max. power cable (16AWG main cable) of base $\leq 50\text{M}$
2. Total power of modules during work < 80%~85% output power of supply

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes
for continuous improvement which will not affect the overall
appearance or performance.

