

OPUS ROUND NEON TUBE

VOM40NK2500

By VONN Lighting





PROJECT:

TYPE:

CATALOG#:

DATE:

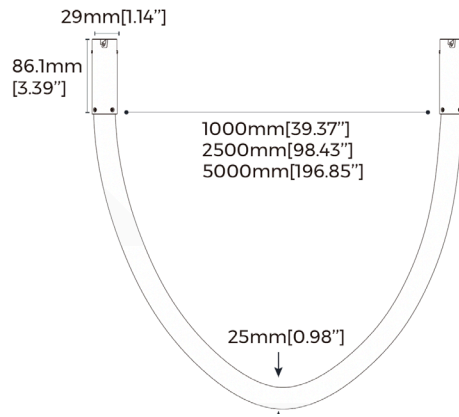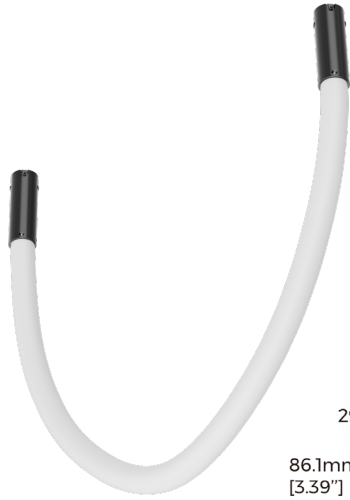


DESCRIPTION

- Round neon tube
- 25mm
- Round neon
- Black
- Length: 2500mm
- 30W
- 2700K/3000K/4000K
- Ra90
- Non-dimming

FEATURES

- Installation: Ceiling
- Material: Silicone Neon
- Coating: Black/White(Customizable) optional
- Dimming method: Non/DALI-2/CASAMBI
- Input voltage: DC48V
- SDCM: <5 Step (ANSI)
- CRI: 90
- CCT: 2700/3000/4000K optional
- Beam angle: 360°
- Application: Indoor
- IP grade: IP20
- Warranty: 5 years
- Certification: CE, UKCA, ETL, ROHS, Reach

DIMENSIONS

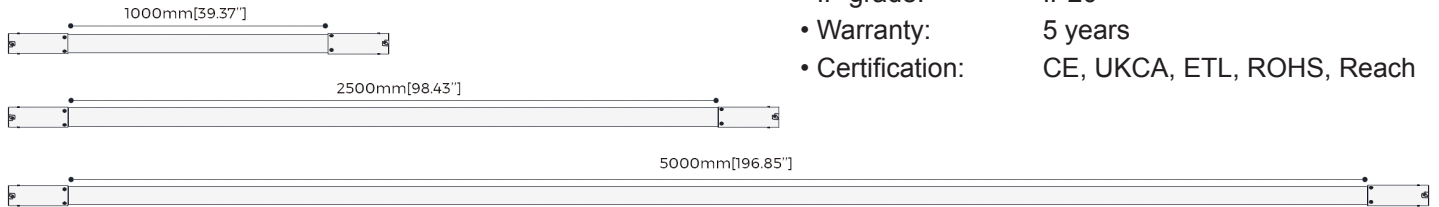

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	CCT	LUMENS
VOM40NK1000	1000mm [3.28ft]	DC48V	14W	>90	2700K	900 [274LM/ft]
					3000K	920 [280LM/ft]
					4000K	980 [299LM/ft]
VOM40NK2500	2500mm [8.2ft]	DC48V	35W	>90	2700K	2250 [274LM/ft]
					3000K	2300 [280LM/ft]
					4000K	2450 [299LM/ft]
VOM40NK5000	5000mm [16.4ft]	DC48V	70W	>90	2700K	4500 [274LM/ft]
					3000K	4600 [280LM/ft]
					4000K	4900 [299LM/ft]

- Note:
1. The above parameters were tested based on Ra90, 4000K, light source;
 2. luminous flux is allowed to have a ±10% error range;
 3. The above parameters are typical values.


Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



OPUS SILICONE NEON TUBE

VOM40NK2500

By VONN Lighting



PROJECT:

TYPE:

CATALOG#:

DATE:

PRODUCT ACCESSORIES INFORMATION

Picture	Section size	Name	Description	Model	Note
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: φ42-45mm Rated Power:150W Rated Current:3A Maximum load: 8Kg/Lamp	VRA-HR40(N)	
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: φ55mm Rated Power:150W Rated Current:3A Maximum load: 1Kg/Lamp	VRA-HE40	
		Quick connector	Material:PA6 Size:L38*W9.4*H10.5mm [Inch Size: L1.5"*W0.37"*H0.41"] Applicable wires: solid wire:0.5-4mm ² stranded wire:0.5-2.5mm ² Rated Voltage:250V/600V Rated Current:32A	VTB-02	
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220-240V Operating frequency: 50/60Hz PF value:≥0.9 Output voltage:48V Output current:2.1A Power:0-100W Efficiency:0.9	VBN-V48-100P	Power supply Accessories
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220-240V Operating frequency: 50/60Hz PF value:≥0.95 Output voltage:48V Output current:3.125A Power:0-150W Efficiency:0.9	VBN-V48-150P	
		Power supply	Dimming mode: Non-dimming Size:400*40*22mm Input voltage:AC220-240V Operating frequency: 50/60Hz PF value:≥0.95 Output voltage:48V Output current:5.12A Power:0-250W Efficiency:0.9	VBN-V48-250P	
		CASAMBI controller	Dimming mode: CASAMBI Size:180*42*25mm [Inch Size:7.09"*1.65"*0.98"] Input voltage:24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices:≤64 Control groups:≤8	V1200EN1612-CAS -0-0000003	Controller should be used with DALI dimming modules.

Note:

1. Max. power cable (16AWG main cable) of base ≤ 50M
2. Total power of modules during work < 80%~85% output power of supply

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

