

OPUS ZOOM ANGLE SPOTLIGHT By VONN Lighting

VOM40SZ65



PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

- Zoom Spotlight
- 15°-36°Angle Adjustable
- Black
- 65mm
- 12W
- 2700K/3000K/4000K
- Ra90
- Non-dimming

FEATURES

- Installation: Ceiling
- Material: AL1070
- Coating: Black/White(Customizable) optional
- Dimming method: Non/DALI-2/CASAMBI
- Input voltage: DC48V
- SDCM: <5 Step (ANSI)
- UGR: <13
- CRI: 90
- CCT: 2700/3000/4000K optional
- Beam angle: 15°-45°Angle Adjustable
- Application: Indoor
- IP grade: IP20
- Warranty: 5 years
- Certification: CE, UKCA, ETL, ROHS, Reach

DIMENSIONS

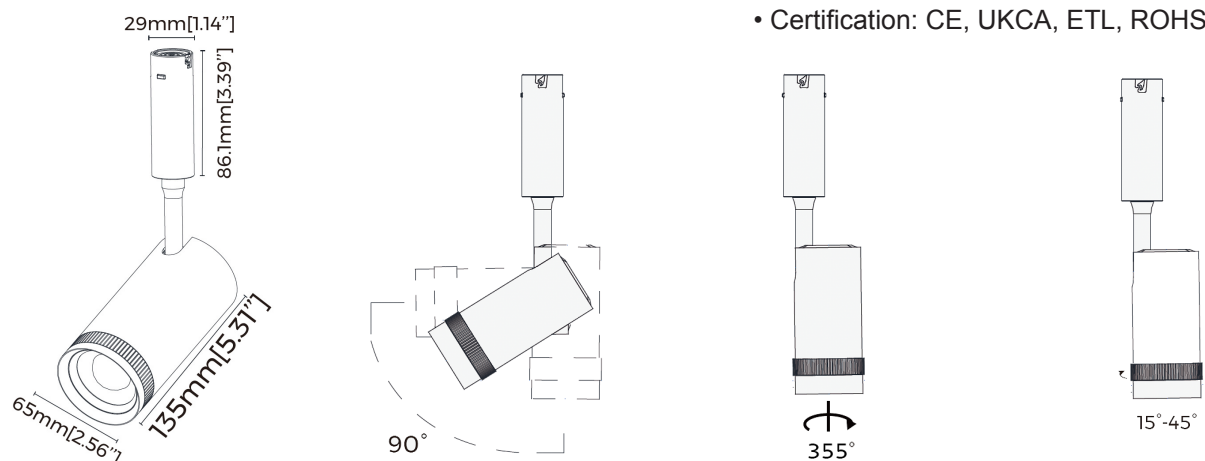

SPECIFICATION

MODEL	DIMENSIONS	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VOM40SZ65	L 135mm (5.31) x W 65mm (2.56")	DC48V	13.2W	>90	15° - 45°	2700K	825
						3000K	870
						4000K	935


Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



OPUS ZOOM ANGLE SPOTLIGHT

By VONN Lighting

VOM40SZ65



PROJECT:



TYPE:

CATALOG#:



DATE:

PHOTOMETRICS

· Beam angle: 15°

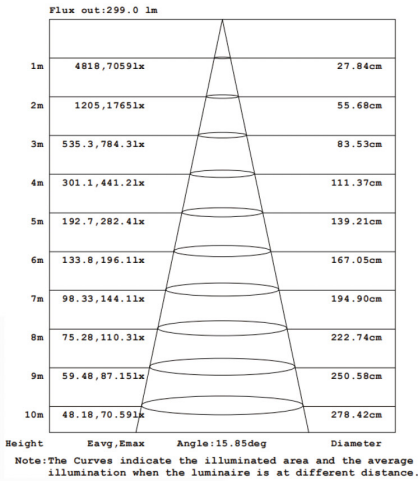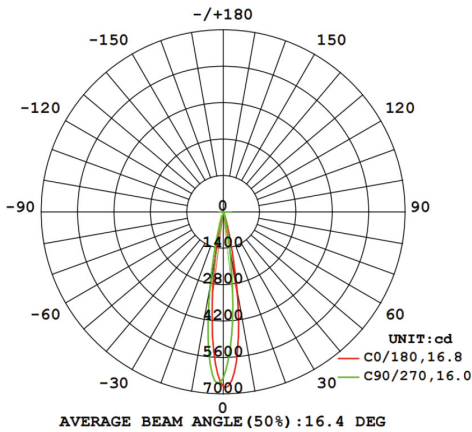

· Beam angle: 45°

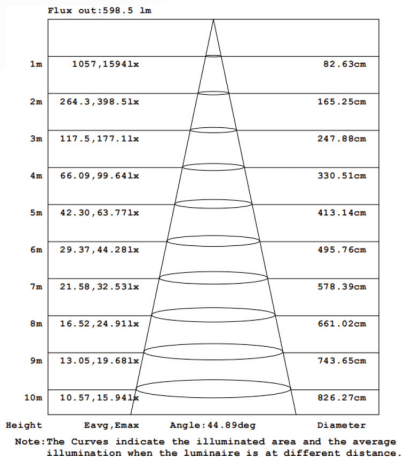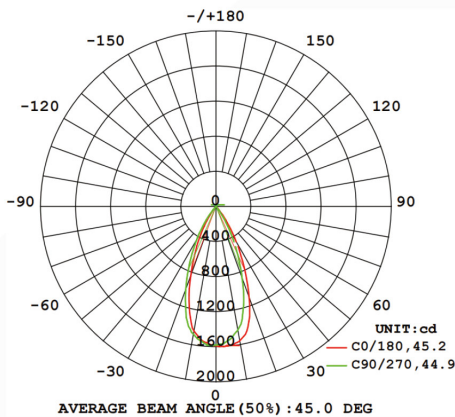

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



DATE:

Picture	Section size	Name	Description	Model	Note
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: $\phi 42-45\text{mm}$ Rated Power:150W Rated Current:3A Maximum load: 8Kg/Lamp	VRA-HR40(N)	
		Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: $\phi 55\text{mm}$ Rated Power:150W Rated Current:3A Maximum load: 1Kg/Lamp	VRA-HE40	
		Quick connector	Material:PA6 Size:L38*W9.4*H10.5mm [Inch Size: L1.5"*W0.37"*H0.41"] Applicable wires: solid wire:0.5-4mm ² stranded wire:0.5-2.5mm ² Rated Voltage:250V/600V Rated Current:32A	VTB-02	
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.9 Output voltage:48V Output current:2.1A Power:0-100W Efficiency:0.9	VBN-V48-100P	Power supply Accessories
		Power supply	Dimming mode: Non-dimming Size:350*30*18mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.95 Output voltage:48V Output current:3.125A Power:0-150W Efficiency:0.9	VBN-V48-150P	
		Power supply	Dimming mode: Non-dimming Size:400*40*22mm Input voltage:AC220~240V Operating frequency: 50/60Hz PF value: ≥ 0.95 Output voltage:48V Output current:5.12A Power:0-250W Efficiency:0.9	VBN-V48-250P	
		CASAMBI controller	Dimming mode: CASAMBI Size :180*42*25mm [Inch Size:7.09"*1.65"*0.98"] Input voltage :24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices: ≤ 64 Control groups: ≤ 8	V1200ENI612-CAS -0-0000003	Controller should be used with DALI dimming modules.

2. Total power of modules during work < 80%~85% output power of supply



ENABLED
Licensing Program for LED
Luminaires and Retrofit Bulbs

Member
Worn LLC

