OPUS WATERDROP LIGHT By VONN Lighting






PROJECT: TYPE: CATALOG#: DATE:



DIMENSIONS

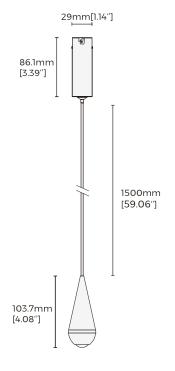

DESCRIPTION

- Waterdrop light
- Black
- 40mm
- 4W
- 2700K/3000K/4000K
- Ra90
- Non-dimming

FEATURES

Installation: PendantMaterial: AL6063-T5

Coating: Black/White(Customizable) optional

• Dimming method: Non/DALI-2/CASAMBI

• Input voltage: DC48V

• SDCM: <5 Step (ANSI)

• CRI: 90

• CCT: 2700/3000/4000K optional

• Beam angle: -

Application: IndoorIP grade: IP20Warranty: 5 years

• Certification: CE, UKCA, ETL, ROHS, Reach

SPECIFICATION

MODEL	DIMENSIONS	VOLTAGE	WATTAGE	CRI	CCT	LUMENS
VOS40IW40	L 1500mm (59.06) x W 29mm (1.14")	DC48V	4W	>90	2700K	330
					3000K	340
					4000K	360

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

© VONN Lighting, 2024







^{***}Please note lumens and wattage are subject to change and will be determined post production of the first articles.

^{*}Any custom modifications are subject to minimum order quantity. (M.O.Q.)

OPUS WATERDROP LIGHT By VONN Lighting

VOS40IW40



PROJECT:	TYPE:	CATALOG#:	DATE:

PRODUCT ACCESSORIES INFORMATION

Picture	Section size	Name	Description	Model	Note	
	di lenn di	Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: q42-45mm Rated Power:150W Rated Current:3A Maximum load: 8Kg/Lamp	VRA-HR40(N)		
	- 55mm - 465mm - 465mm - 465mm	Base	Material: PC+ADC12 Input Voltage:DC48V Coating:Black,White Open Size: φ55mm Rated Power:150W Rated Current:3A Maximum load: 1Kg/Lamp	VRA-HE40		
	10 5mm	Quick connector	Material:PA6 Size:L38"W9.4"H10.5mm [Inch Size: L1.5""W0.37""H0.41"] Applicable wires: solid wire:0.5-4mm² stranded wire:0.5-2.5mm² Rated Voltage:250V/600V Rated Current:32A	VTB-02		
	March (M)	Power supply	Dimming mode: Non-dimming Size:350'30'18mm Input voltage:AC220-240V Operating frequency: 50/60Hz PF value≥0.9 Output voltage:48V Output current:2.1A Power:0-100W Efficiency:0.9	VBN-V48-100P		
	mongon) Samondon Samondo		Dimming mode: Non-dimming Size.350'30'18mm Input voltage.AC220~240V Operating frequency: 50/60Hz PF value≥0.95 Output voltage.48V Output current:3.125A Power.0-150W Efficiency:0.9	VBN-V48-150P	Power supply Accessories	
conduct) Married C		Power supply	Dimming mode: Non-dimming Size-400'40'22mm Input voltage-AC220-240V Operating frequency: 50/60Hz PF value≥0.95 Output voltage-48V Output current-5.12A Power.0-250W Efficiency:0.9	VBN-V48-250P		
a design of the second	172mm(6.77)	CASAMBI controller	Dimming mode: CASAMBI Size:180°42'25mm [Inch Size:7.09"1.65"0.98"] Input voltage:24-48VDC Output signal:DALI Output DALI Max.current: 250mA Control devices.≤64 Control groups.≤8	VI200ENI6I2-CAS -0-000003	Controller should be used with DALI dimming modules.	

Note:

- 1. Max. power cable (16AWG main cable) of base ≤ 50M
- 2. Total power of modules during work < 80%~85% output power of supply

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

© VONN Lighting, 2024







^{***}Please note lumens and wattage are subject to change and will be determined post production of the first articles.

^{*}Any custom modifications are subject to minimum order quantity. (M.O.Q.)