STANDARD CYLINDER HEAD By VONN Lighting

VTSH35BL


PROJECT:	TYPE:	CATALOG#:	DATE:



DESCRIPTION


Standard cylinder head, offering three different beam angles, achieved through refractive or hybrid units. The junction arm is seamlessly integrated into the spotlight's body to ensure the barrel remains centered on the track, preventing imbalance, even in suspended track versions. This junction allows for 360° rotation, providing full flexibility. The fixture also features an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

DIMENSIONS

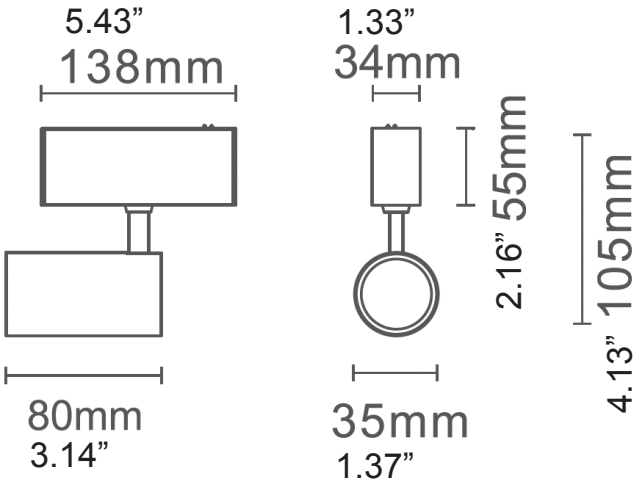


PHOTOMETRICS

20°




h(m)	E(lx)	Φ(m)
1	3146	Φ0.34
2	786	Φ0.68
3	349	Φ1.02
4	196	Φ1.36
5	125	Φ1.71

40°



h(m)	E(lx)	Φ(m)
1	1963	Φ0.43
2	490	Φ0.87
3	218	Φ1.30
4	122	Φ1.74
5	78	Φ2.17

30°



h(m)	E(lx)	Φ(m)
1	3121	Φ0.36
2	780	Φ0.72
3	346	Φ1.08
4	195	Φ1.45
5	124	Φ1.81

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSLH35BL	35mm x 35m x 80mm (1.38” x 1.38” x 3.15”)	5W	2700K/3000K/4000K	530Lm	>90	20/30/40D

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.