

# LED CURVE SERIES CYLINDER HEAD

## VTSH65RD9BL / VTSH92RD9BL

By VONN Lighting



PROJECT:

TYPE:

CATALOG#:


DATE:



## DESCRIPTION



Available in two sizes, each with three different beam angles, achieved through refractive or hybrid optical units. The junction arm is integrated into the spotlight's body, ensuring the barrel stays aligned with the track and preventing any imbalance in suspended track versions. The junction also allows for 360° rotation, providing maximum flexibility. Additionally, the fixture includes an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

## DIMENSIONS

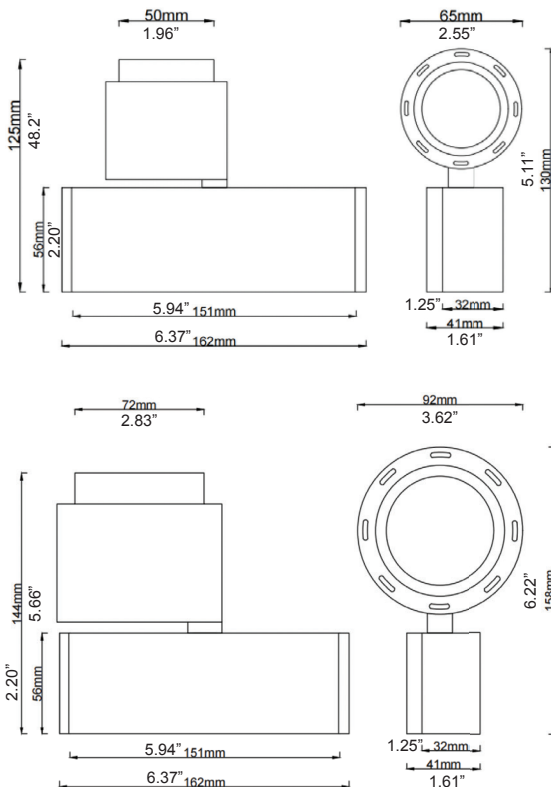

## PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

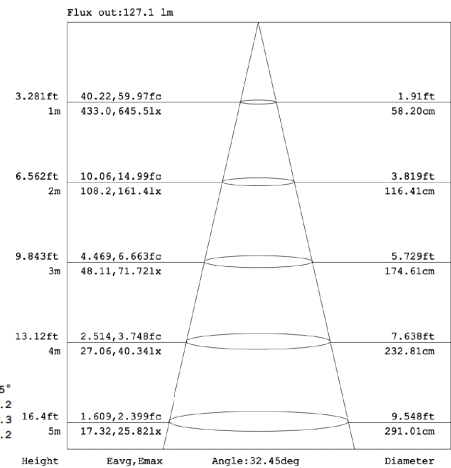

## SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSH65RD9BL	65mm x 65mm x 63mm (2.56" x 2.56" x 2.48")	8W	2700K/3000K/4000K	255Lm	>90	10/20/30D
VTSH92RD9BL	92mm x 92mm x 82mm (3.62" x 3.62" x 3.23")	15W	2700K/3000K/4000K	485Lm	>90	10/20/30D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

