

# STANDARD SERIES SLIM HEAD By VONN Lighting

## VTSHSL90BL



PROJECT:

TYPE:

CATALOG#:


DATE:




## DESCRIPTION

Standard Series Slim Head with three different beam angles obtained by means of refractive or hybrid units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation. External dimming interface with Triac, 0/1-10V, Dali.


## PHOTOMETRICS




h(m)	E(lx)	Φ(m)
1	4969	Φ0.37
2	1242	Φ0.74
3	552	Φ1.12
4	310	Φ1.49
5	198	Φ1.87



h(m)	E(lx)	Φ(m)
1	1935	Φ0.72
2	483	Φ1.44
3	215	Φ2.16
4	120	Φ2.88
5	77	Φ3.60




h(m)	E(lx)	Φ(m)
1	3264	Φ0.55
2	816	Φ1.11
3	362	Φ1.67
4	204	Φ2.23
5	130	Φ2.79



h(m)	E(lx)	Φ(m)
1	1067	Φ1.14
2	266	Φ2.28
3	118	Φ3.42
4	66	Φ4.56
5	42	Φ5.71

## DIMENSIONS

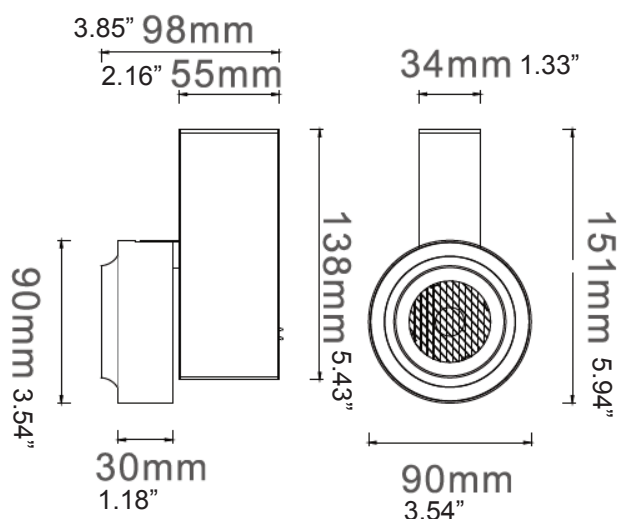

## SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSHSL90BL	L: 90MM x W: 90MM x H: 30MM (L: 3.54" x W: 3.54" x H: 1.18")	15W	2700K/3000K/4000K	670Lm	>90	20/30/40/60D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

