

SLIM CURVE CYLINDER SPOT SERIES

VTSLH35D10BL / VTSLH35TD10BL / VTSLH50D10BL By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:



DATE:



DESCRIPTION



Available in two sizes, each offering three different beam angles, achieved through refractive or hybrid units. The junction arm is seamlessly integrated into the spotlight's body to ensure the barrel remains centered on the track, preventing imbalance, even in suspended track versions. This junction allows for 360° rotation, providing full flexibility. The fixture also features an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

DIMENSIONS

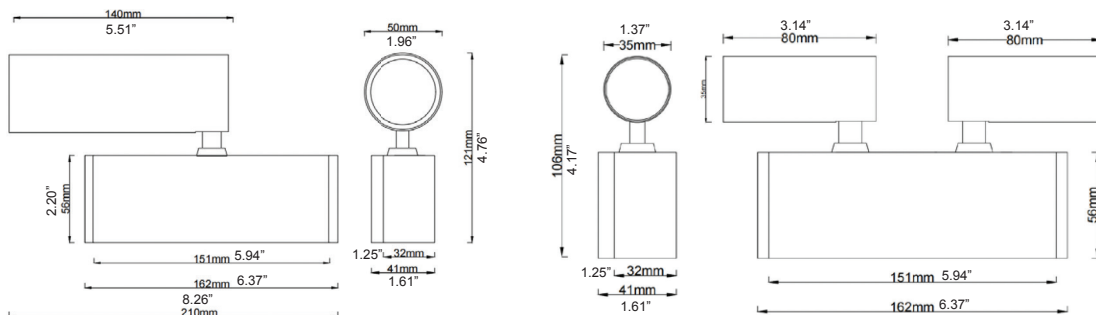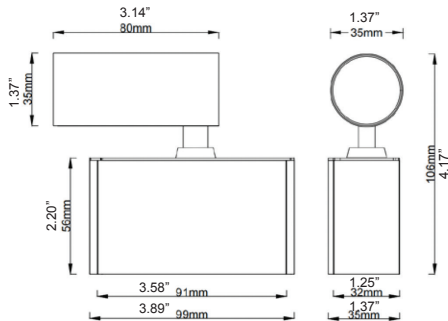

PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

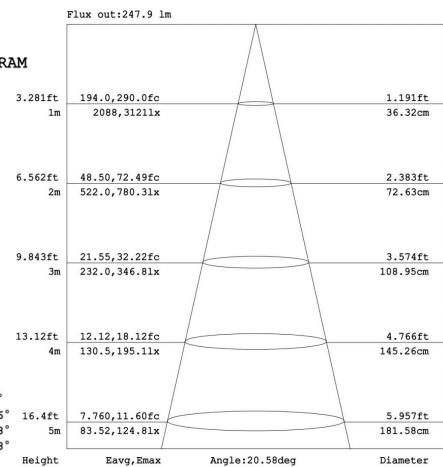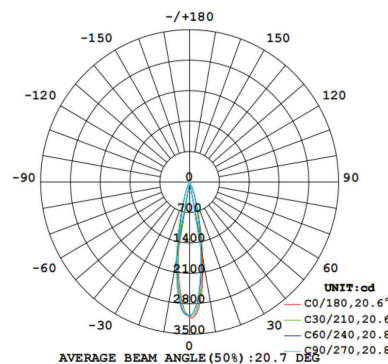

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSLH35D10BL	35mm x 35mm x 80mm (1.38" x 1.38" x 3.15")	5W	2700K/3000K/4000K	440lm	>90	20/30/40D
VTSLH35TD10BL	35mm x 80mm x 80mm (1.38" x 3.15" x 3.15")	2*5W	2700K/3000K/4000K	880lm	>90	20/30/40D
VTSLH50D10BL	50mm x 50mm x 140mm (1.97" x 1.97" x 5.51")	10W	2700K/3000K/4000K	780lm	>90	18/24/36D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

