

# SLIM CURVE CYLINDER SPOT SERIES

VTSLH35D10BL / VTSLH35TD10BL / VTSLH50D10BL By VONN Lighting



PROJECT:

TYPE:

CATALOG#:



DATE:

## DESCRIPTION



Available in two sizes, each offering three different beam angles, achieved through refractive or hybrid units. The junction arm is seamlessly integrated into the spotlight's body to ensure the barrel remains centered on the track, preventing imbalance, even in suspended track versions. This junction allows for 360° rotation, providing full flexibility. The fixture also features an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

## PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

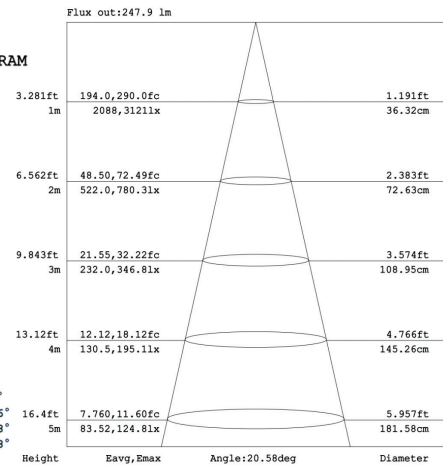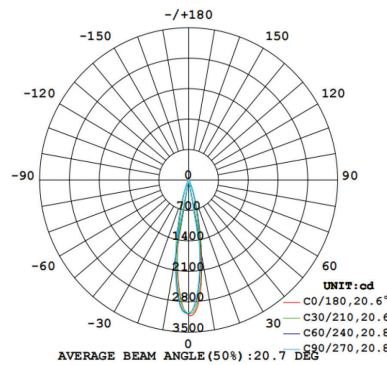

## DIMENSIONS

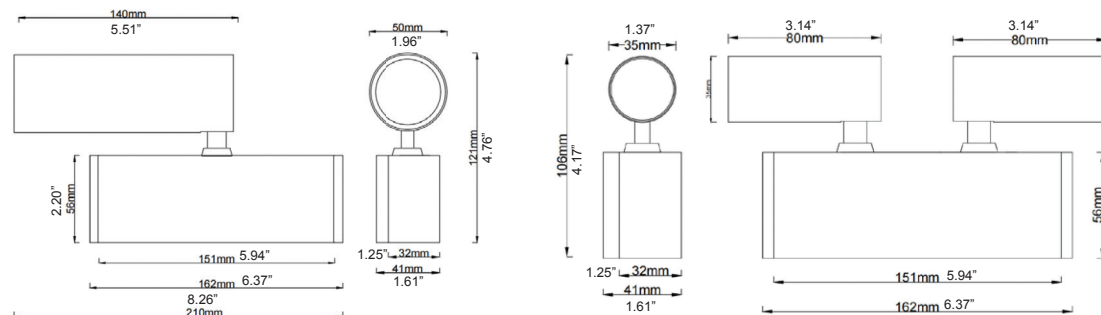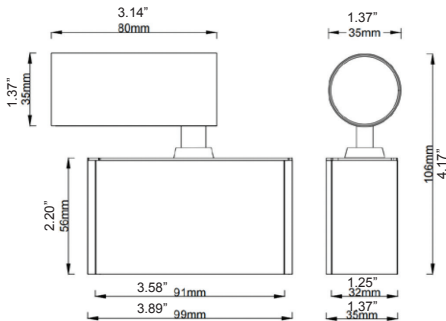

## SPECIFICATION

| MODEL         | SIZE  | WATTAGE | CCT               | LUMENS | CRI | BEAM ANGLE |
|---------------|---|---------|-------------------|--------|-----|------------|
| VTSLH35D10BL  | 35mm x 35mm x 80mm (1.38" x 1.38" x 3.15")  | 5W      | 2700K/3000K/4000K | 440lm  | >90 | 20/30/40D  |
| VTSLH35TD10BL | 35mm x 80mm x 80mm (1.38" x 3.15" x 3.15")  | 2*5W    | 2700K/3000K/4000K | 880lm  | >90 | 20/30/40D  |
| VTSLH50D10BL  | 50mm x 50mm x 140mm (1.97" x 1.97" x 5.51") | 10W     | 2700K/3000K/4000K | 780lm  | >90 | 18/24/36D  |

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

