

LED SLIM CYLINDER SERIES By VONN Lighting

VTSLH35BL / VTSLH35TBL / VTSLH50BL / VTSLH70BL



PROJECT:

TYPE:

CATALOG#:


DATE:



DESCRIPTION



Available in two sizes, each offering three different beam angles, achieved through refractive or hybrid units. The junction arm is seamlessly integrated into the spotlight's body to ensure the barrel remains centered on the track, preventing imbalance, even in suspended track versions. This junction allows for 360° rotation, providing full flexibility. The fixture also features an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

DIMENSIONS

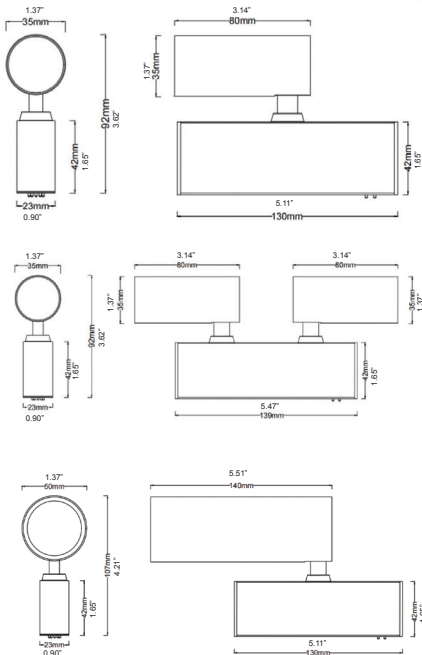

PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

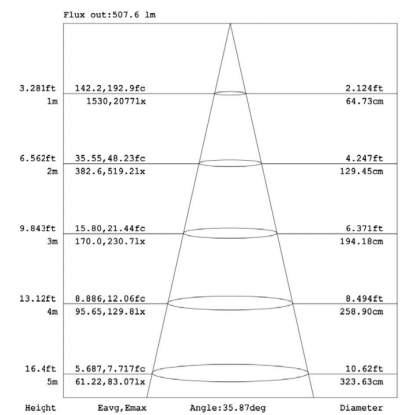

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSLH35BL	35mm x 35mm x 80mm (1.38" x 1.38" x 3.15")	5W	2700K/3000K/4000K	530Lm	>90	20/30/40D
VTSLH35TBL	35mm x 80mm x 80mm (1.38" x 3.15" x 3.15")	2*5W	2700K/3000K/4000K	1060Lm	>90	20/30/40D
VTSLH50BL	50mm x 50mm x 140mm (1.97" x 1.97" x 5.51")	10W	2700K/3000K/4000K	730Lm	>90	18/24/36D
VTSLH70BL	70mm x 70mm x 162mm (2.76" x 2.76" x 6.38")	20W	2700K/3000K/4000K	1300Lm	>90	15/24/36D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

