

LED CURVE SERIES SLIM HEAD D600

VTSLHSL70D6BL / VTSLHSL90D6BL / VTSLHSL110D6BL

VONN

By VONN Lighting

PROJECT:

TYPE:

CATALOG#:


DATE:




DESCRIPTION

Available in three sizes, each offering different beam angles achieved through refractive or hybrid units. The junction arm is integrated into the spotlight's body to keep the barrel perfectly centered on the track, preventing any imbalance in suspended track versions. The junction allows for 360° rotation, providing full flexibility. Additionally, the fixture includes an external dimming interface compatible with Triac, 0/1-10V, and Dali systems for versatile lighting control.

PHOTOMETRICS

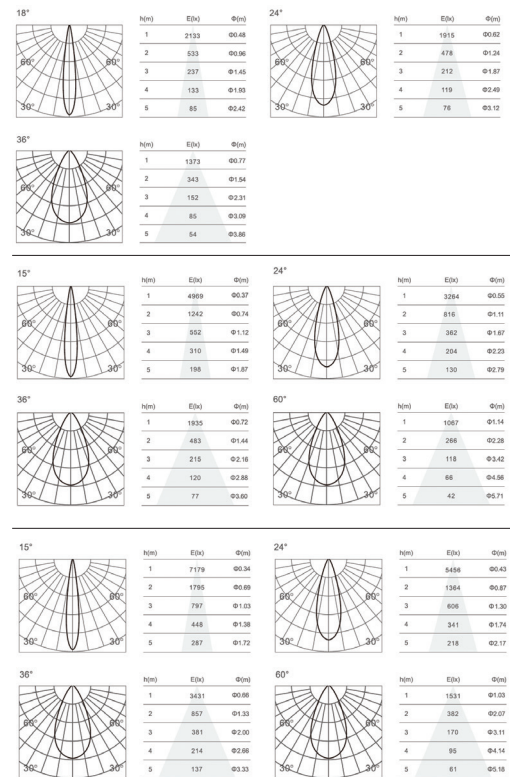

DIMENSIONS

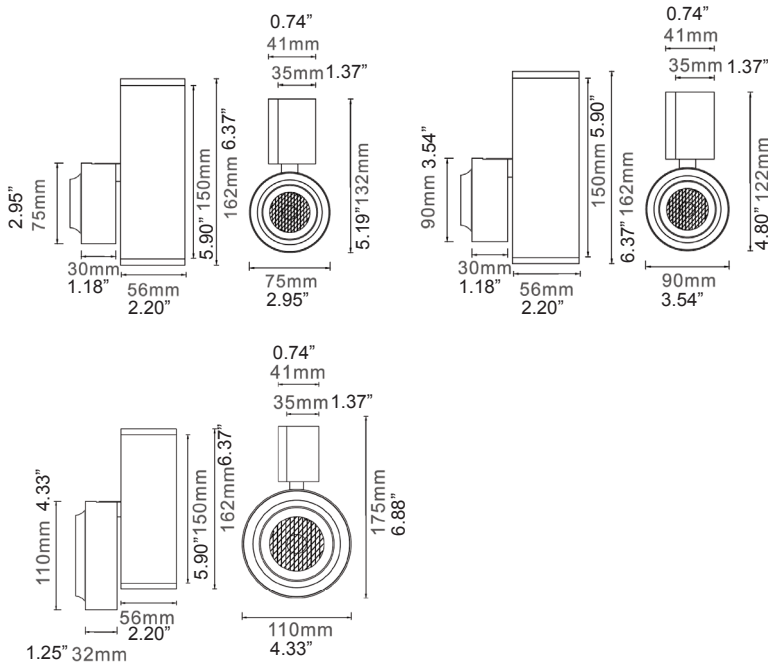

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTSLHSL70D6BL	L: 70MM x W: 70MM x H: 30MM (L: 2.76" x W: 2.76" x H: 1.18")	10W	2700K/3000K/4000K	450Lm	>90	24/36/48D
VTSLHSL90D6BL	L: 90MM x W: 90MM x H: 30MM (L: 3.54" x W: 3.54" x H: 1.18")	15W	2700K/3000K/4000K	670Lm	>90	20/30/40/60D
VTSLHSL110D6BL	L: 110MM x W: 110MM x H: 30MM (L: 4.33" x W: 4.33" x H: 1.18")	20W	2700K/3000K/4000K	840Lm	>90	20/30/40/60D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

