

# LED ULTRA SLIM SQUARE SERIES

VTUSLH35SQBL / VTUSLH50SQBL

By VONN Lighting

**VONN**

PROJECT:

TYPE:

CATALOG#:

DATE:




## DESCRIPTION

Three different beam angles each, obtained by means of refractive or hybrid optical units. Junction arm integrated in the spotlight's body to keep the barrel center aligned with the track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation.



External dimming interface with Triac, 0/1-10V, Dali.

## DIMENSIONS

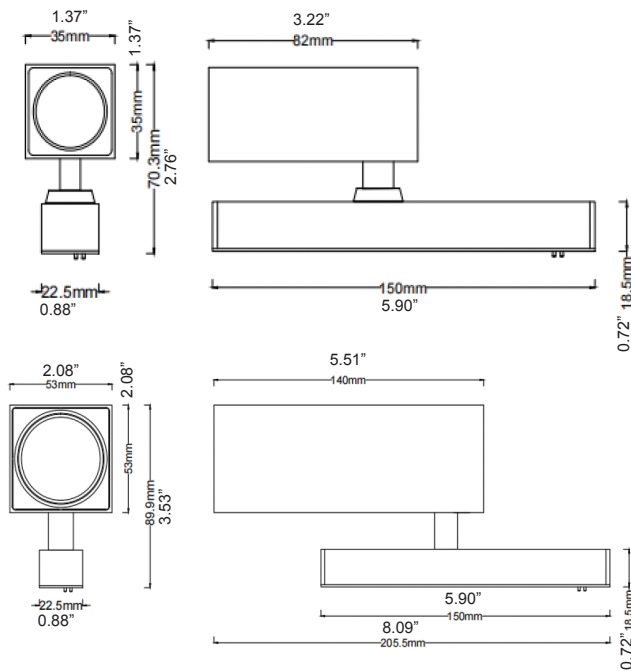

## PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

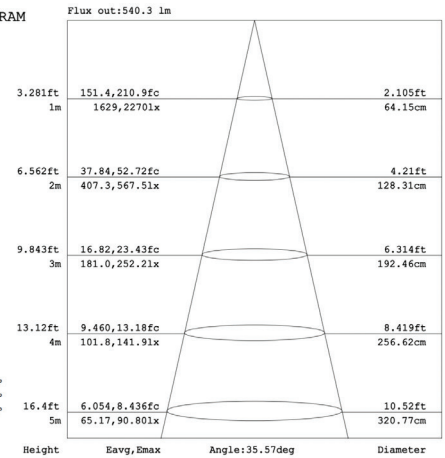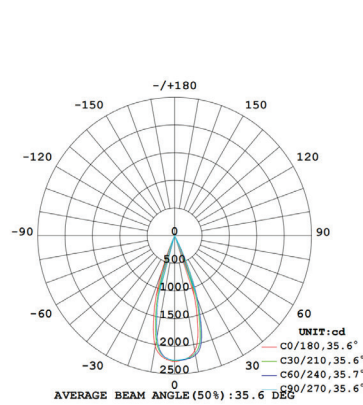

## SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTUSLH35SQBL	35mm x 35mm x 82mm (1.38" x 1.38" x 3.23")	8W	2700K/3000K/4000K	365Lm	>90	15D
VTUSLH50SQBL	53mm x 53mm x 140mm (2.09" x 2.09" x 5.51")	10W	2700K/3000K/4000K	725Lm	>90	18/24/36D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

**VONN, LLC.**

3323 NE 163rd St, PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

