

LED ULTRA SLIM CYLINDER SERIES

VTUSLH65RBL / VTUSLH92RBL

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:


DATE:



DESCRIPTION


Two sizes with three different beam angles each, obtained by means of refractive or hybrid units. Junction arm integrated in the spotlight's body to keep the barrel center aligned with the track and prevent any imbalance in possible suspension versions of track. The junction allows 360° rotation. External dimming interface with Triac, 0/1-10V, Dali

DIMENSIONS

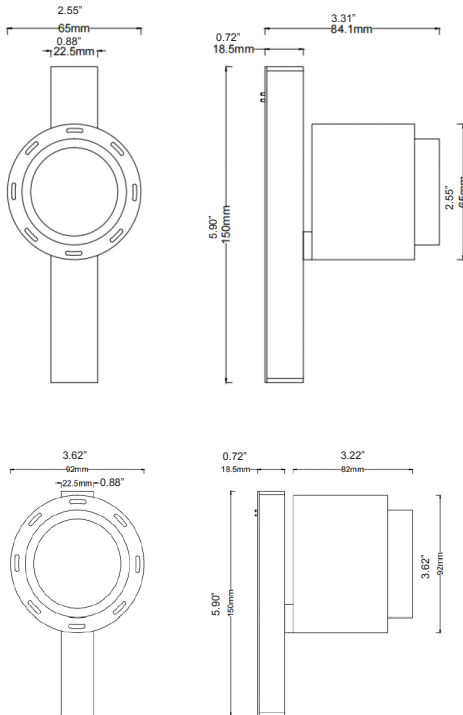


PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

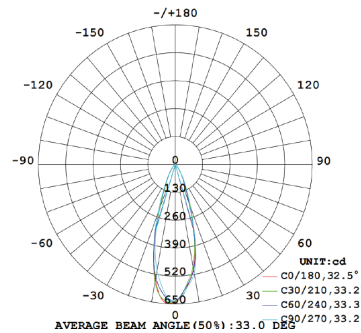

Flux out: 127.1 lm

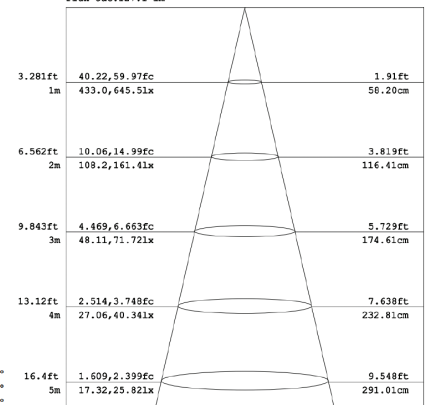

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTUSLH65RBL	65mm x 65mm x 63mm (2.56" x 2.56" x 2.48")	8W	2700K/3000K/4000K	255Lm	>90	10/20/30D
VTUSLH92RBL	92mm x 92mm x 82mm (3.62" x 3.62" x 3.23")	15W	2700K/3000K/4000K	485Lm	>90	10/20/30D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024