

ULTRA SLIM SERIES SLIM HEAD By VONN Lighting

VTUSLHSL70BL / VTUSLHSL90BL / VTUSLHSL110BL



PROJECT:

TYPE:

CATALOG#:


DATE:



DESCRIPTION


Three sizes with different beam angles each, obtained by means of refractive or hybrid units. Junction arm integrated in the spotlight's body to keep the barycentre aligned with the track and prevent any imbalance in possible suspension versions of track and prevent any imbalance in possible suspension versions of the track. The junction allows 360° rotation. External dimming interface with Triac, 0/1-10V, Dali

DIMENSIONS

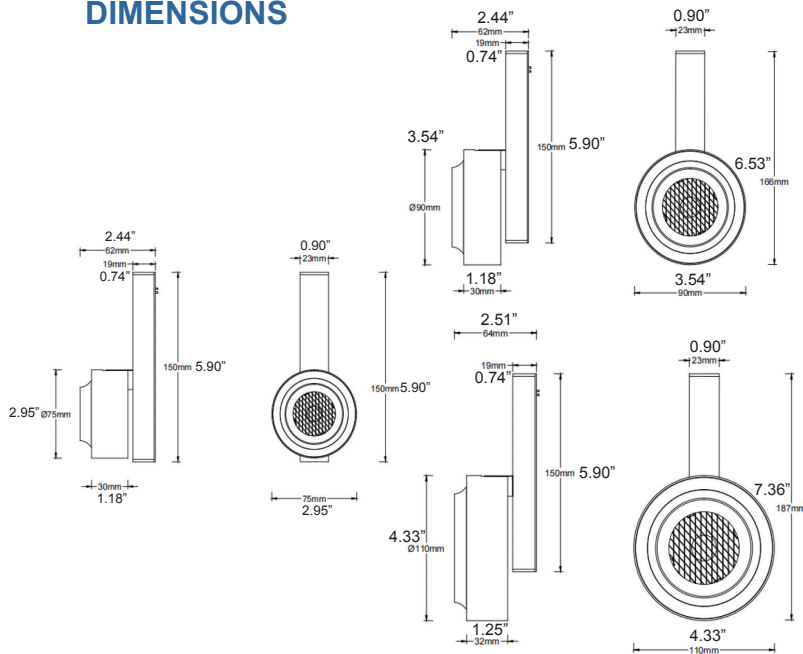

PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

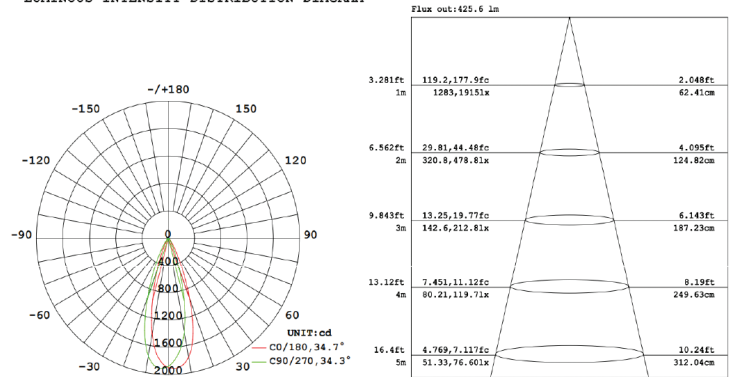

SPECIFICATION

MODEL	SIZE	WATTAGE	CCT	LUMENS	CRI	BEAM ANGLE
VTUSLHSL70BL	L: 70MM x W: 70MM x H: 30MM (L: 2.76" x W: 2.76" x H: 1.18")	10W	2700K/3000K/4000K	450Lm	>90	24/36/48D
VTUSLHSL90BL	L: 90MM x W: 90MM x H: 30MM (L: 3.54" x W: 3.54" x H: 1.18")	15W	2700K/3000K/4000K	670Lm	>90	20/30/40/60D
VTUSLHSL110BL	L: 110MM x W: 110MM x H: 30MM (L: 4.33" x W: 4.33" x H: 1.18")	20W	2700K/3000K/4000K	840Lm	>90	20/30/40/60D

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

