

PROJECT:

TYPE:

CATALOG#:

DATE:



DESCRIPTION

- Grating
- 30°/50°
- Black
- Length: 440mm
- 24W
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 110mm, 220mm, 440mm optional
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 30°, 55°
- Light efficiency: 73 LM/W, 68 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

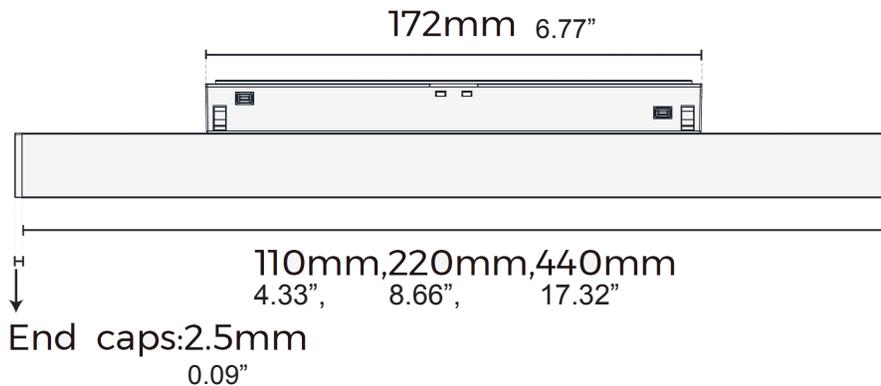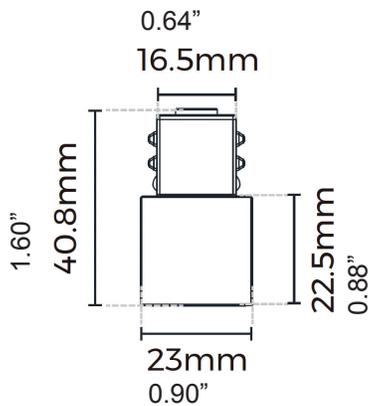

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

PROJECT:

TYPE:

CATALOG#:

DATE:

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20G24	110mm [0.36ft]	48VDC / 24-48VDC	6W	>90	30°	2700K	400 [1110LM/ft]
						3000K	410 [1140LM/ft]
						4000K	440 [1220LM/ft]
	110mm [0.36ft]	48VDC / 24-48VDC	6W		55°	2700K	370 [1030LM/ft]
						3000K	380 [1050LM/ft]
						4000K	410 [1140LM/ft]
	220mm [0.72ft]	48VDC / 24-48VDC	12W		30°	2700K	800 [1110LM/ft]
						3000K	820 [1140LM/ft]
						4000K	880 [1220LM/ft]
	220mm [0.72ft]	48VDC / 24-48VDC	12W		55°	2700K	740 [1030LM/ft]
						3000K	760 [1050LM/ft]
						4000K	820 [1140LM/ft]
	440mm [1.44ft]	48VDC	24W		30°	2700K	1600 [1110LM/ft]
						3000K	1630 [1140LM/ft]
						4000K	1750 [1220LM/ft]
	440mm [1.44ft]	48VDC	24W		55°	2700K	1480 [1030LM/ft]
						3000K	1520 [1050LM/ft]
						4000K	1630 [1140LM/ft]

Note:

1. The output data is based on the testing result of Ra90, 4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

PROJECT:



TYPE:

CATALOG#:



DATE:

PHOTOMETRICS



· Type Power:6W

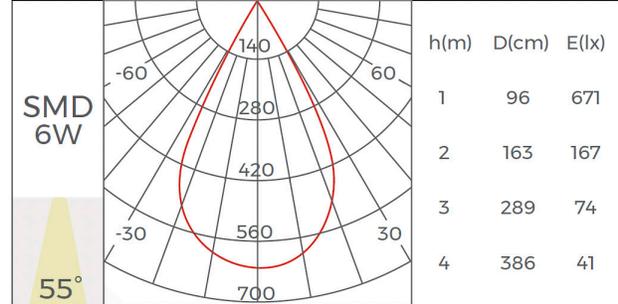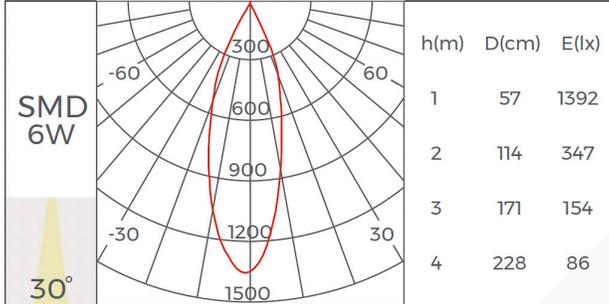

· Type Power:12W

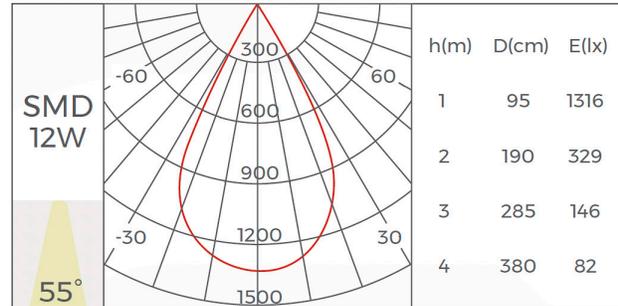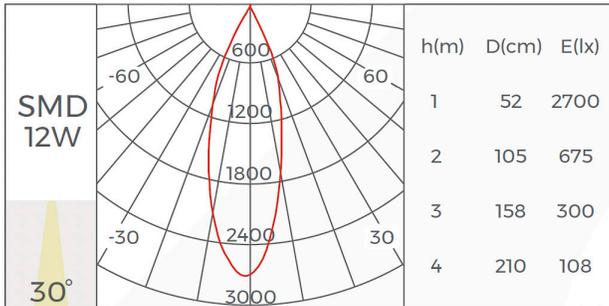

· Type Power:24W

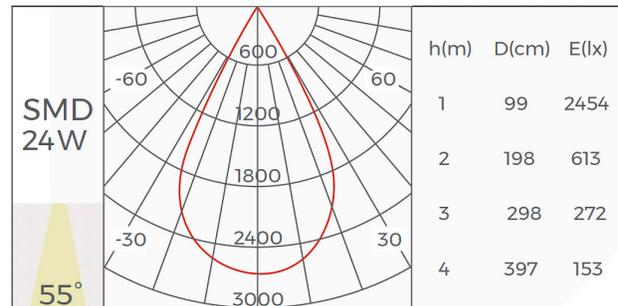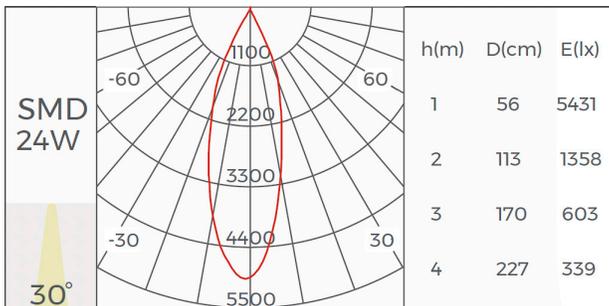

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024