

LYRA / ORION PENDANT

By VONN Lighting

VUTH20I50


VONN

PROJECT:


TYPE:

CATALOG#:

DATE:

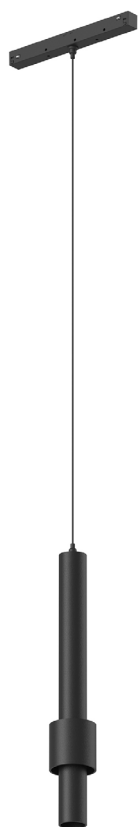

DIMENSIONS

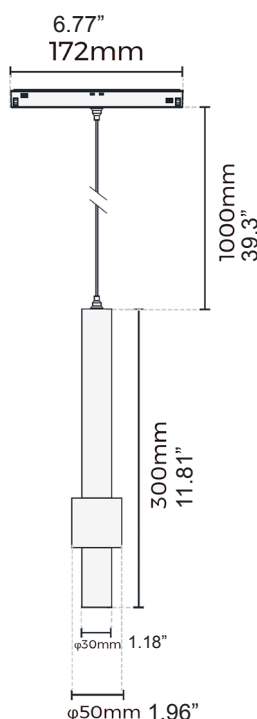

DESCRIPTION

- Pendant
- Black
- 50mm
- 5W
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 50mm x 300mm
- IP grade: IP20
- CCT: 2700K/3000K/4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 24°, 36°
- Light efficiency: 66 LM/W
- Input voltage: DC24V-48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20I50	300mm [0.98ft]	24-48VDC	5W	>90	24°	2700K	300
						3000K	310
						4000K	330
					36°	2700K	300
						3000K	310
						4000K	330

Note:

1. The output data is based on the testing result of Ra90, 4000k, 24° luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St, PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.




PROJECT:

TYPE:

CATALOG#:

DATE:

POINTS TO NOTE

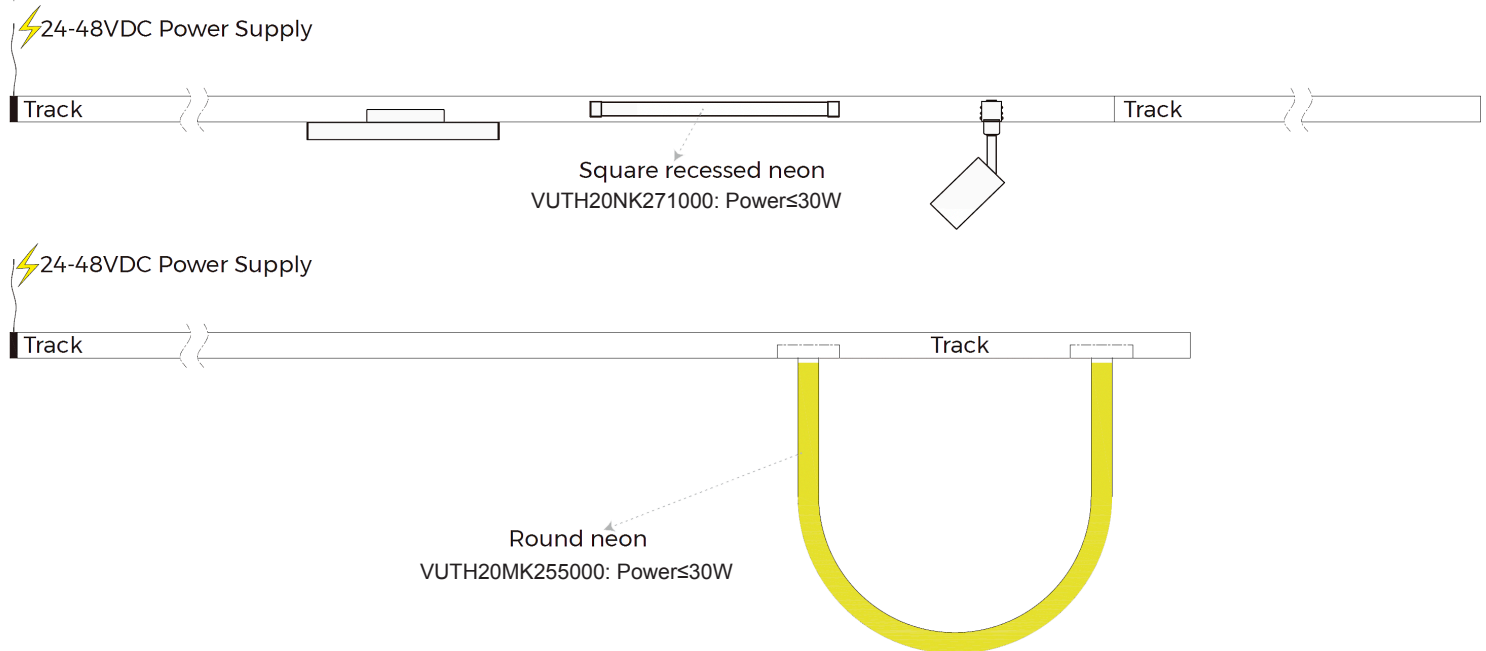

Supplementary power supplies are needed beside the Spotlights module / Decorative module / Linear modular under below one conditions:

1. Power of Square recessed neon VUTH20NK271000 >30W
2. Power of Round neon VUTH20MK255000 >30W
3. If a DC24V-48V power supply is used to power the track, then only luminaire modules with an input voltage of DC24V-48V can be selected.
4. If a DC48V power supply is used to power the track, then a luminaire module with an input voltage of DC24V-48V or DC48V can be selected.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024