


PROJECT:

TYPE:

CATALOG#:

DATE:

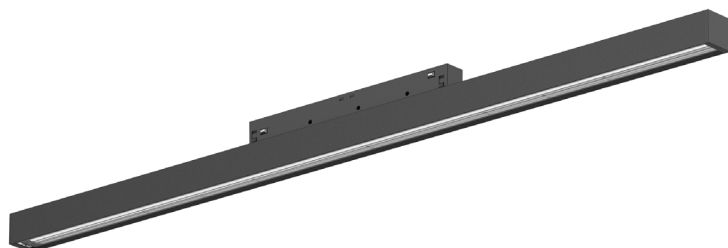




DESCRIPTION

- Asymmetric
- 90° x 45° x 15° Beam angle
- Black
- 600mm
- 14W
- 3000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 300mm, 600mm, 900mm optional
- IP grade: IP20
- CCT: 2700, 3000, 4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Light efficiency: 100 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

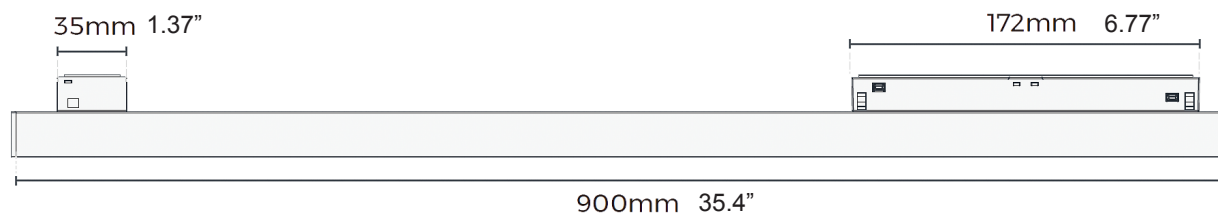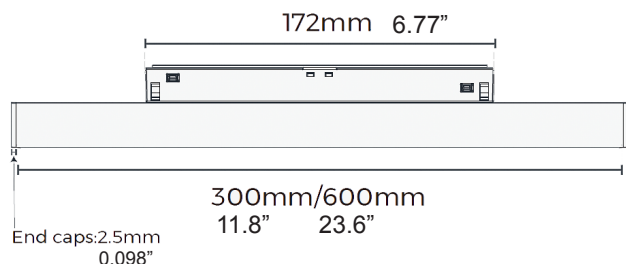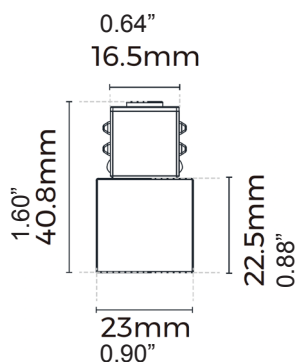

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

LYRA / ORION ASYMMETRIC

By VONN Lighting

VUTH20LA600



PROJECT:

TYPE:

CATALOG#:

DATE:


SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20LA600	300mm [0.98ft]	48VDC / 24-48VDC	7W	>90	90° x 45° x 15°	2700K	640 [655LM/ft]
						3000K	650 [660LM/ft]
						4000K	700 [715LM/ft]
	600mm [1.97ft]	48VDC / 24-48VDC	14W		90° x 45° x 15°	2700K	1280 [650LM/ft]
						3000K	1305 [660LM/ft]
						4000K	1400 [710LM/ft]
	900mm [2.95ft]	48VDC	20W		90° x 45° x 15°	2700K	1830 [620LM/ft]
						3000K	1860 [630LM/ft]
						4000K	2000 [680LM/ft]

Note:

1. The output data is based on the testing result of Ra90, 4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

PHOTOMETRICS

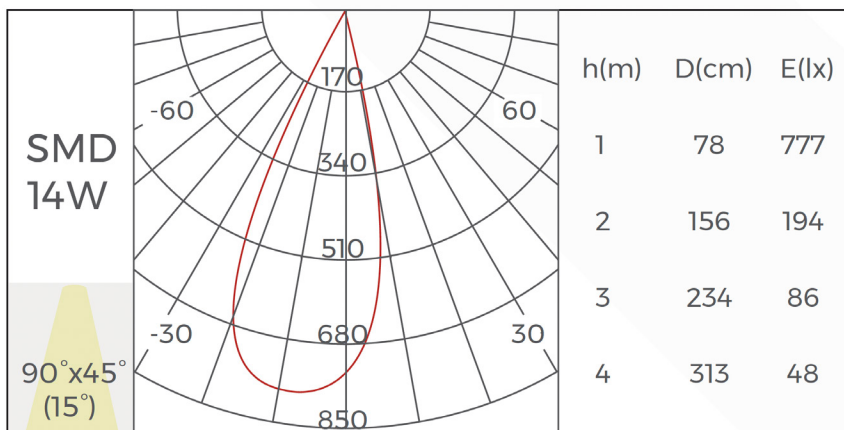

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

