

LYRA / ORION DOUBLE ASYMMETRIC

VUTH20LS300

By VONN Lighting


VONN

PROJECT:

TYPE:

CATALOG#:

DATE:

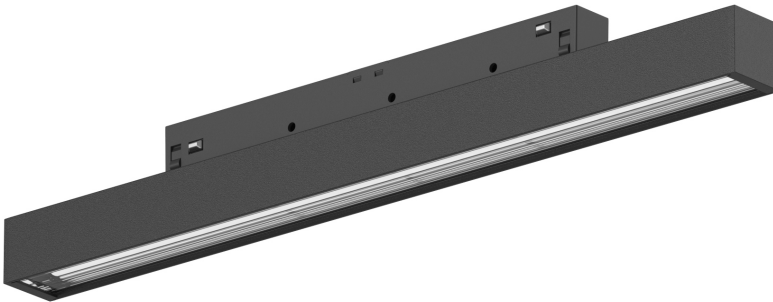




DESCRIPTION

- Double Asymmetric
- 100° x 90° x 15° beam angle
- Black
- 300mm
- 7W
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 300mm, 600mm, 900mm optional
- IP grade: IP20
- CCT: 2700, 3000, 4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Light efficiency: 100 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

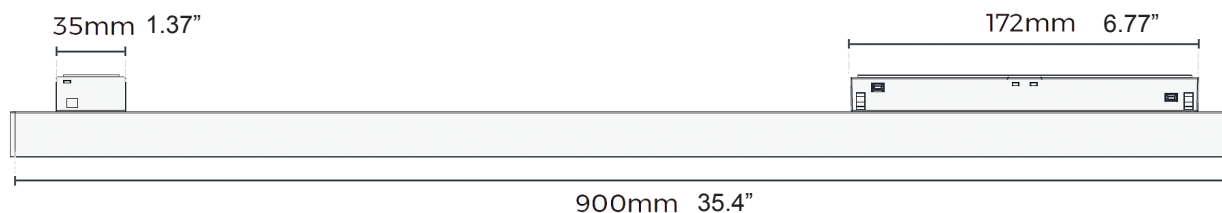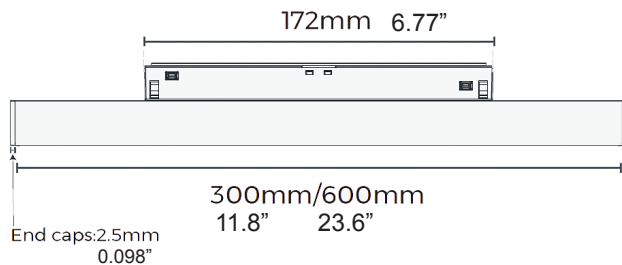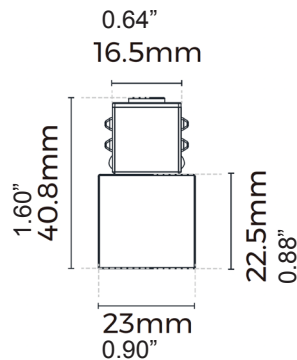

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



LYRA / ORION DOUBLE ASYMMETRIC

VUTH20LS300

By VONN Lighting




PROJECT:	TYPE:	CATALOG#:	DATE:
----------	-------	-----------	-------

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20LS300	300mm [0.98ft]	48VDC / 24-48VDC	7W	>90	100° x 90° x 15°	2700K	640 [655LM/ft]
						3000K	650 [660LM/ft]
						4000K	700 [715LM/ft]
	600mm [1.97ft]	48VDC / 24-48VDC	14W		100° x 90° x 15°	2700K	1280 [650LM/ft]
						3000K	1305 [660LM/ft]
						4000K	1400 [710LM/ft]
	900mm [2.95ft]	48VDC	20W		100° x 90° x 15°	2700K	1830 [620LM/ft]
						3000K	1860 [630LM/ft]
						4000K	2000 [680LM/ft]

- Note:
1. The output data is based on the testing result of Ra90, 4000k luminaires;
 2. The tolerance of output data can be vary up to 10%;
 3. The output data is typical value.

PHOTOMETRICS

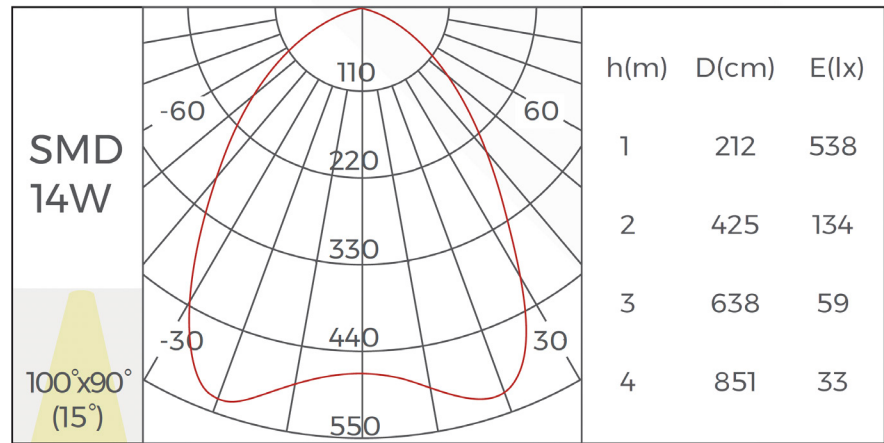

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

