

LYRA / ORION SPOTLIGHT

VUTH20S30

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

- Spotlight
- 18°/24°/36°/50°
- Black
- 30mm
- 3W
- 2700K/3000K/4000K/
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 30*55mm
- IP grade: IP20
- CCT: 2700K,3000K,4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 18°,24°,36°,50°
- Light efficiency: 74 LM/W,78 LM/W,78 LM/W,72 LM/W
- Input voltage: DC24V-48V
- Lighting direction: Downward
- Dimming method: Non-dimming,DALI-2,Tuya Bluetooth,CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

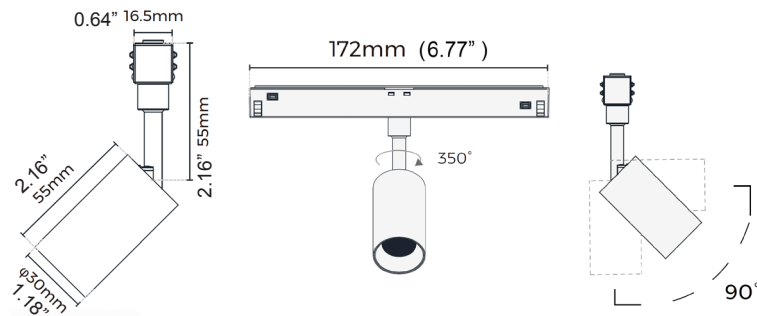

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20S30	W 30mm (1.18") x H 55mm (2.16")	24-48VDC	3.0W	>90	18°	2700K	200lm
						3000K	210lm
						4000K	225lm
					24°	2700K	205lm
						3000K	220lm
						4000K	235lm
					36°	2700K	205lm
						3000K	220lm
						4000K	235lm
					50°	2700K	190lm
						3000K	200lm
						4000K	215lm

Note:

1. The output data is based on the testing result of Ra90, 4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)


***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



ORION / LYRA SPOTLIGHT

VUTH20S30

By VONN Lighting



PROJECT:






TYPE:

CATALOG#:

DATE:

PHOTOMETRICS

· Type Power:3W

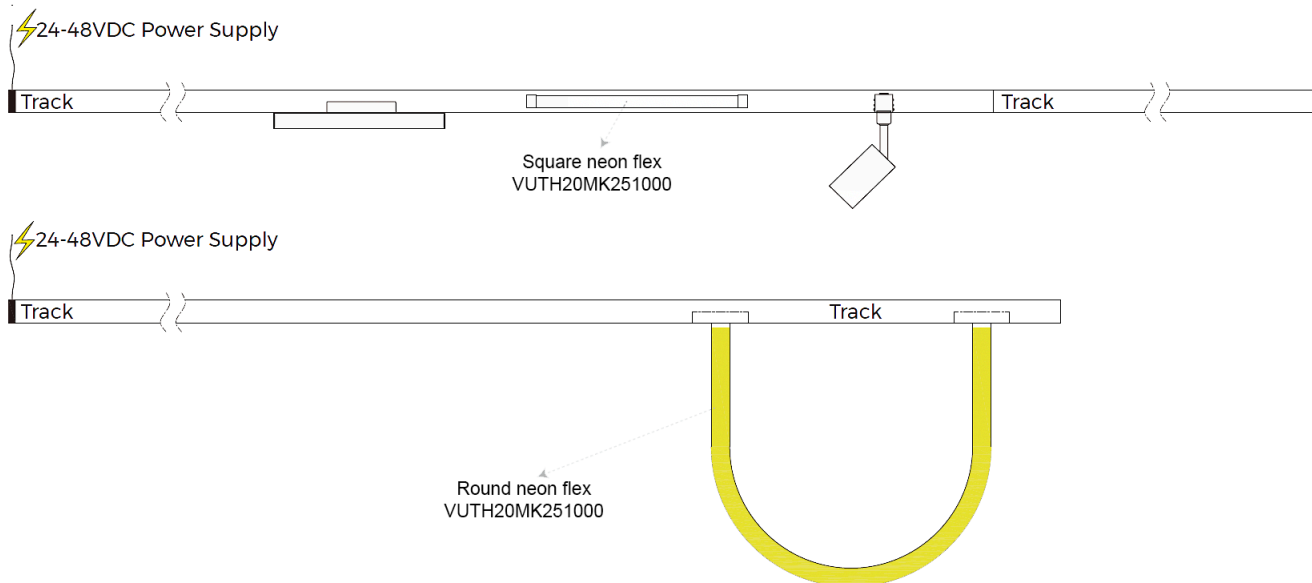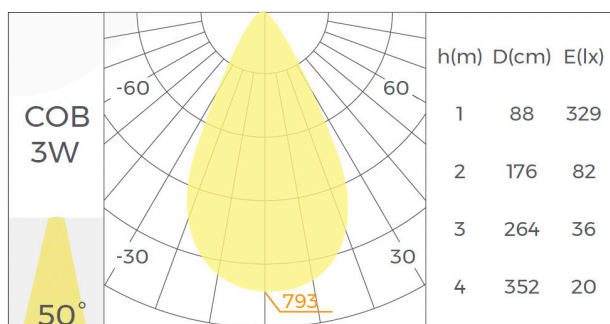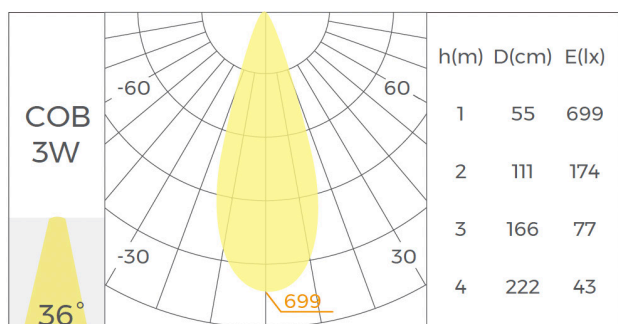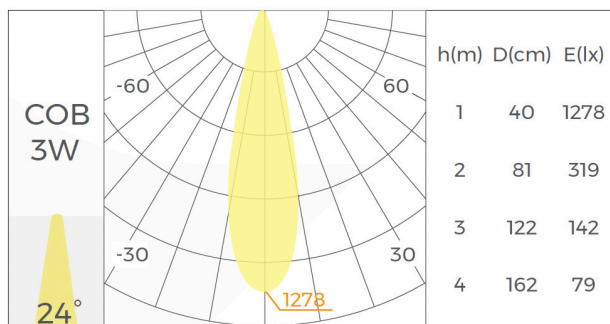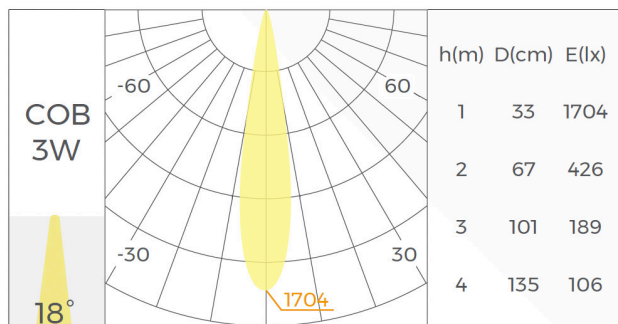

Supplementary power supplies are needed beside the Spotlights module / Decorative module / Linear modular under conditions below:

1. Power of Square neon flex: VUTH20NK271000 >10W
2. Power of Round neon flex: VUTH20MK251000 >12W
3. If a DC24V-48V power supply is used to power the track, then only luminaire modules with an input voltage of DC24V-48V can be selected.
4. If a DC48V power supply is used to power the track, then a luminaire module with an input voltage of DC24V-48V or DC48V can be selected.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

