

LYRA / ORION SPOTLIGHT

By VONN Lighting

VONN

VUTH20S523CCT

PROJECT:

TYPE:

CATALOG#:

DATE:




DESCRIPTION

- 15°/20°/36°
- 50°/
- Black
- 52mm
- Spotlight
- 10W/
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 52*95mm
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K, 3000K-3800K-5000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 15°, 20°, 36°, 50° (Normal version)
24°, 38°, 50° (3 CCT tunable (Dial switch))
- Light efficiency: 91 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

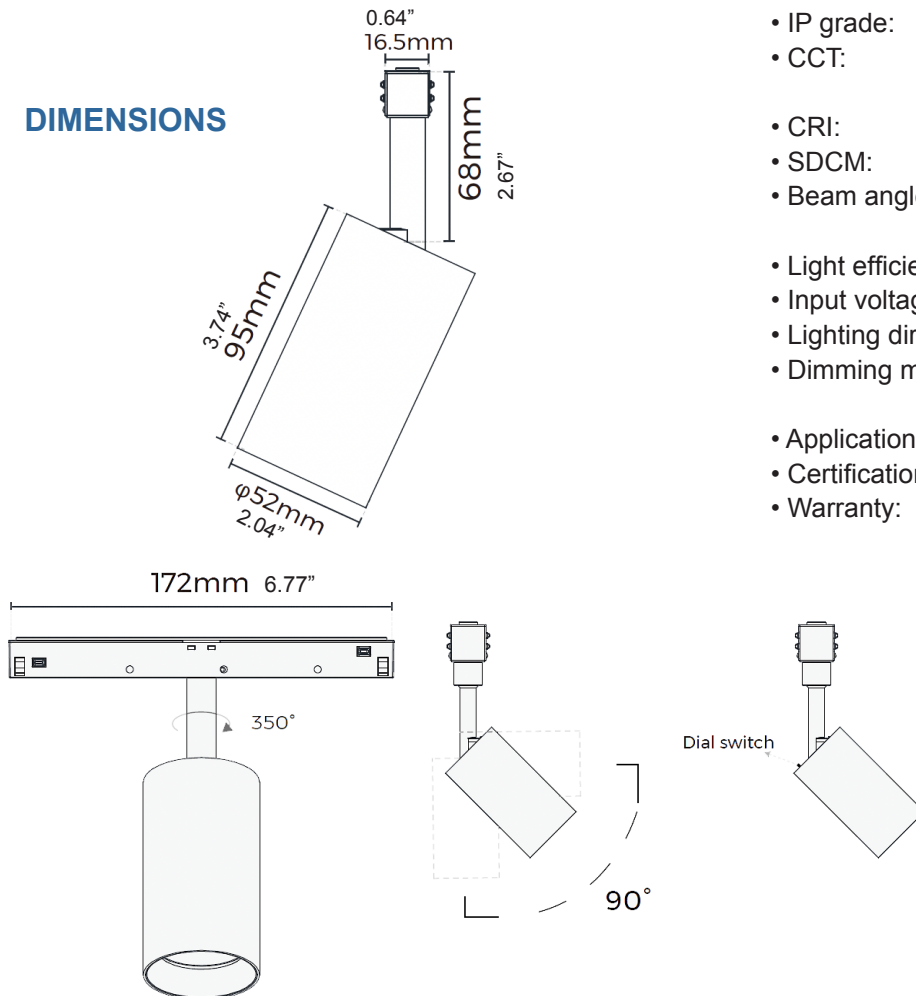

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



LYRA / ORION SPOTLIGHT

By VONN Lighting

VUTH20S523CCT



PROJECT:

TYPE:

CATALOG#:

DATE:

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20S52	W 52mm (2.04") x H 95mm (3.74")	24-48VDC	10.5W	>90	15°	2700K	755lm
						3000K	795lm
						4000K	855lm
					20°	2700K	785lm
						3000K	830lm
						4000K	890lm
					36°	2700K	805lm
						3000K	850lm
						4000K	915lm
VUTH20S52 3CCT Tunable (Dial switch)					50°	2700K	745lm
						3000K	785lm
						4000K	845lm
					24°	3000K	845lm
						3800K	910lm
						5000K	895lm
					38°	3000K	845lm
						3800K	910lm
						5000K	895lm
					50°	3000K	845lm
						3800K	910lm
						5000K	895lm

- Note:
- 1. The output data is based on the testing result of Ra90,4000K luminaires;
 - 2. The tolerance of output data can be vary up to 10%;
 - 3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



LYRA / ORION SPOTLIGHT

By VONN Lighting

VUTH20S523CCT

VONN

PROJECT:





TYPE:

CATALOG#:




DATE:

PHOTOMETRICS

· Normal

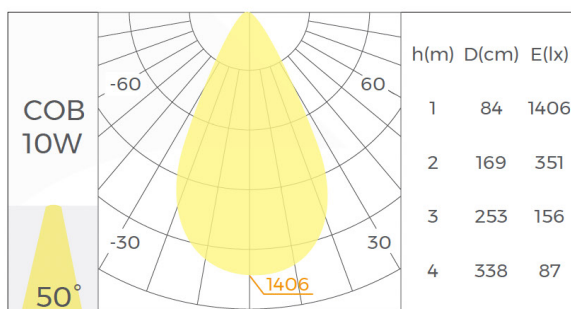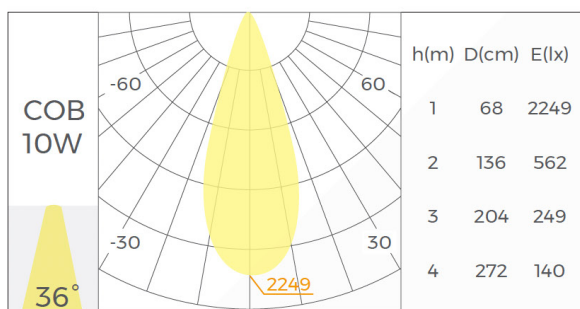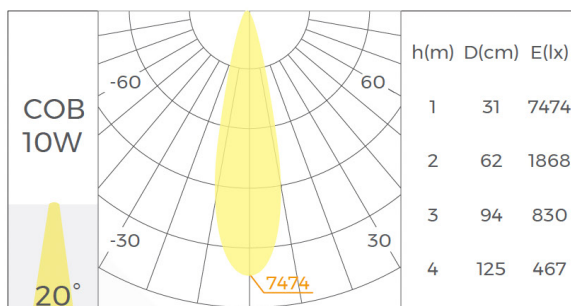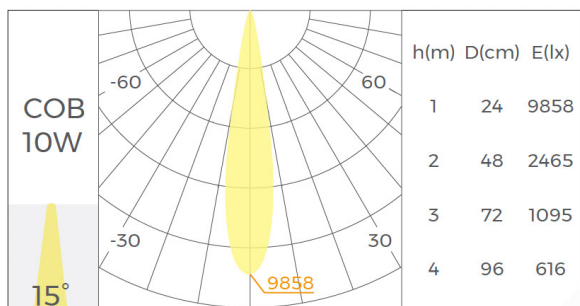

· 3 CCT tunable(Dial switch)

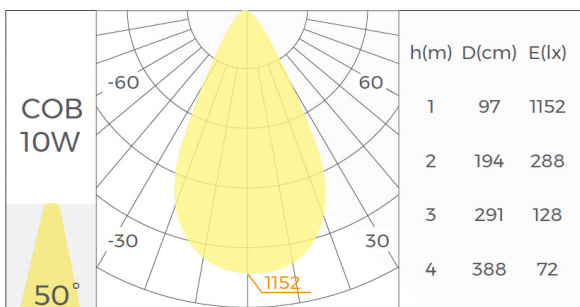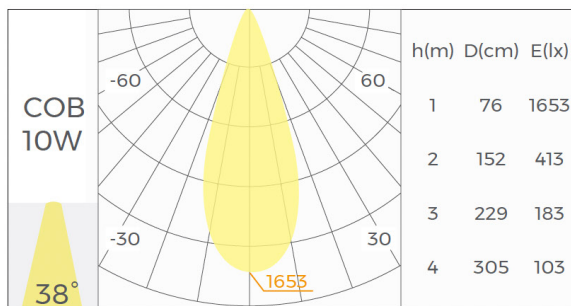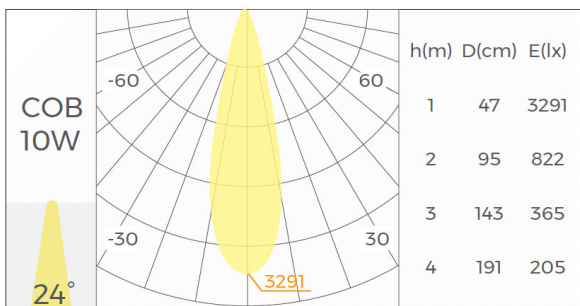

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024