

# LYRA / ORION SPOTLIGHT

By VONN Lighting

# VONN

## VUTH20S52

PROJECT:

TYPE:

CATALOG#:

DATE:




### DESCRIPTION

- 15°/20°/36°
- 50°/
- Black
- 52mm
- Spotlight
- 10W/
- 2700K/3000K/4000K
- Ra90

### FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 52\*95mm
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K, 3000K-3800K-5000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 15°, 20°, 36°, 50° (Normal version)  
24°, 38°, 50° (3 CCT tunable (Dial switch))
- Light efficiency: 91 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

### DIMENSIONS

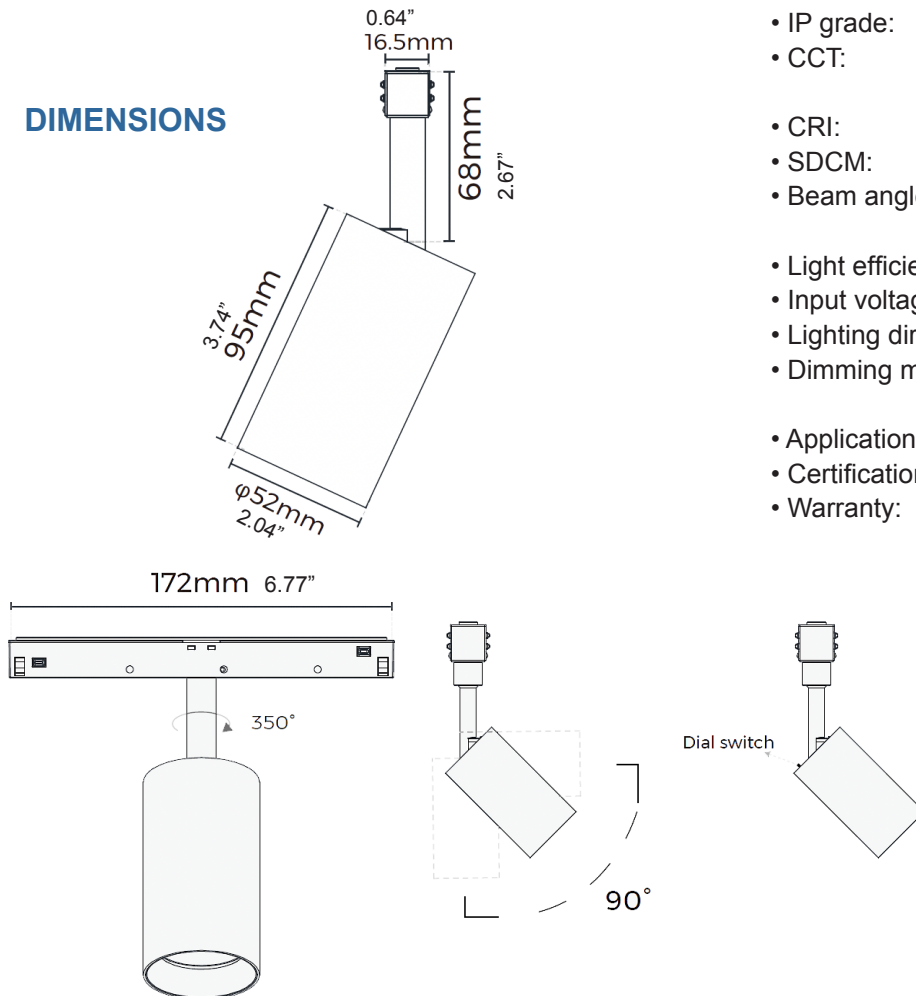

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706  
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



LYRA / ORION SPOTLIGHT

By VONN Lighting

VUTH20S52



PROJECT:

TYPE:

CATALOG#:

DATE:

SPECIFICATION

| MODEL                                   | LENGTH                          | VOLTAGE  | WATTAGE | CRI | BEAM ANGLE | CCT   | LUMENS |
|-----------------------------------------|---------------------------------|----------|---------|-----|------------|-------|--------|
| VUTH20S52                               | W 52mm (2.04") x H 95mm (3.74") | 24-48VDC | 10.5W   | >90 | 15°        | 2700K | 755lm  |
|                                         |                                 |          |         |     |            | 3000K | 795lm  |
|                                         |                                 |          |         |     |            | 4000K | 855lm  |
|                                         |                                 |          |         |     | 20°        | 2700K | 785lm  |
|                                         |                                 |          |         |     |            | 3000K | 830lm  |
|                                         |                                 |          |         |     |            | 4000K | 890lm  |
|                                         |                                 |          |         |     | 36°        | 2700K | 805lm  |
|                                         |                                 |          |         |     |            | 3000K | 850lm  |
|                                         |                                 |          |         |     |            | 4000K | 915lm  |
| VUTH20S52 3CCT<br>Tunable (Dial switch) |                                 |          |         |     | 50°        | 2700K | 745lm  |
|                                         |                                 |          |         |     |            | 3000K | 785lm  |
|                                         |                                 |          |         |     |            | 4000K | 845lm  |
|                                         |                                 |          |         |     | 24°        | 3000K | 845lm  |
|                                         |                                 |          |         |     |            | 3800K | 910lm  |
|                                         |                                 |          |         |     |            | 5000K | 895lm  |
|                                         |                                 |          |         |     | 38°        | 3000K | 845lm  |
|                                         |                                 |          |         |     |            | 3800K | 910lm  |
|                                         |                                 |          |         |     |            | 5000K | 895lm  |
|                                         |                                 |          |         |     | 50°        | 3000K | 845lm  |
|                                         |                                 |          |         |     |            | 3800K | 910lm  |
|                                         |                                 |          |         |     |            | 5000K | 895lm  |

- Note:
- 1. The output data is based on the testing result of Ra90,4000K luminaires;
  - 2. The tolerance of output data can be vary up to 10%;
  - 3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)  
Theoretical Wattage: XXX W (subject to change)  
\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.  
\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024



# LYRA / ORION SPOTLIGHT

By VONN Lighting

## VUTH20S52

**VONN**

PROJECT:





TYPE:

CATALOG#:




DATE:

## PHOTOMETRICS

· Normal

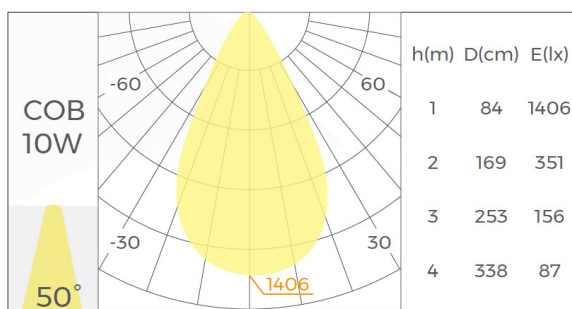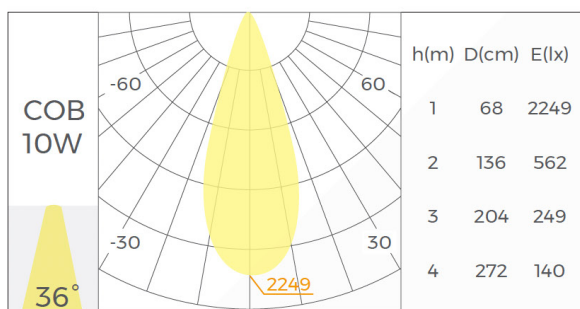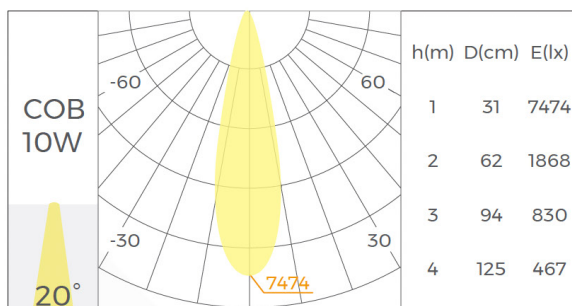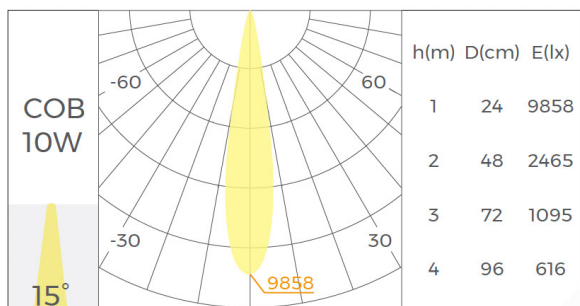

· 3 CCT tunable(Dial switch)

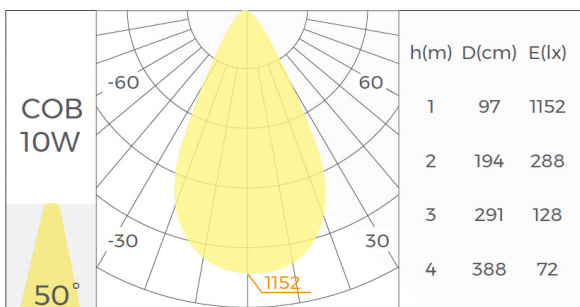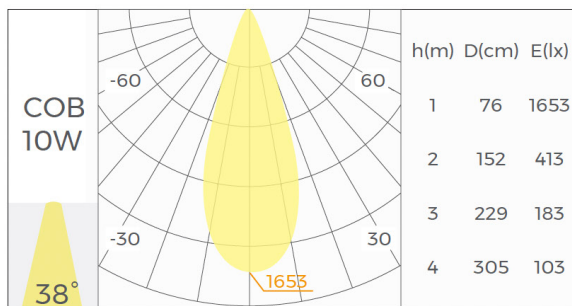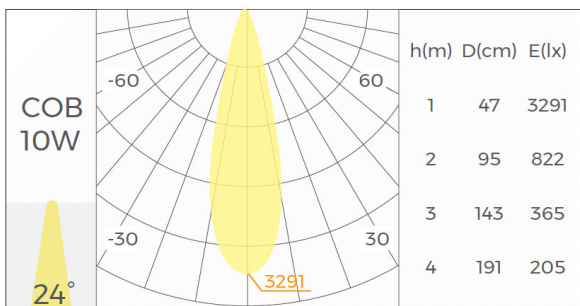

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

\*\*\*Please note lumens and wattage are subject to change and will be determined post production of the first articles.

\*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024