LYRA / ORION SPOTLIGHT By VONN Lighting

VUTH20S623CCT

PROJECT:	TYPE:	CATALOG#:	DATE:




DESCRIPTION


- Spotlight
- 12°/20/°30°/45°
- Black
- 62mm
- 15W
- 2700K/3000K/4000K
- Ra90


FEATURES


• Material:	AL6063-T5, spraying surface
• Coating:	Black (RAL9005)
• Size:	62*145mm
• IP grade:	IP20
• CCT:	2700K,3000K,4000K, 3000K-3800K-5000K optional
• CRI:	90
• SDCM:	<3 Step (ANSI)
• Beam angle:	12°,20°,30°,45°(Normal version) 15°,24°,36°,50°(3 CCT tunable(Dial switch)
• Light efficiency:	93 LM/W
• Input voltage:	DC24V-48V,DC48V
• Lighting direction:	Downward
• Dimming method:	Non-dimming,DALI-2,Tuya Bluetooth,CASAMBI
• Application:	Indoor
• Certification:	CE, UKCA, ROHS, Reach
• Warranty:	5 years

DIMENSIONS

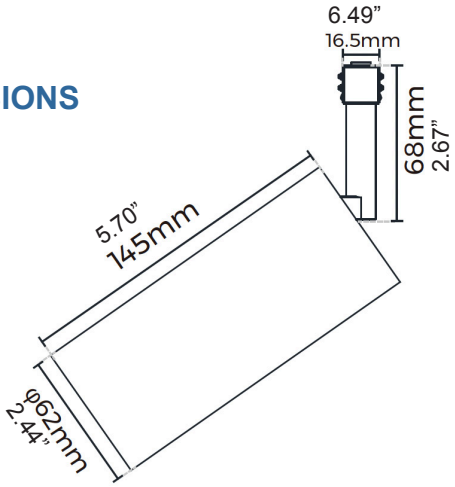

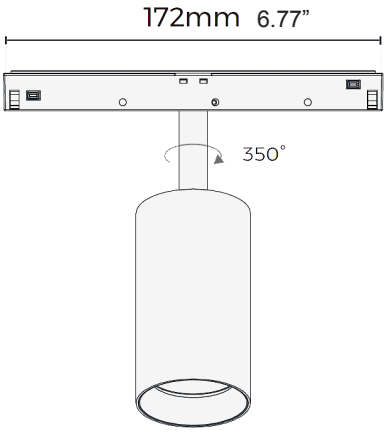





Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.

LYRA / ORION SPOTLIGHT By VONN Lighting

VUTH20S623CCT

PROJECT:	TYPE:	CATALOG#:	DATE:

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20S62	W 62mm (2.44") x H 145mm (5.70")	24-48VDC	15.0W	>90	12°	2700K	990lm
						3000K	1045lm
						4000K	1125lm
					20°	2700K	990lm
						3000K	1054lm
						4000K	1125lm
					30°	2700K	965lm
						3000K	1020lm
						4000K	1095lm
					45°	2700K	885lm
						3000K	935lm
						4000K	1005lm
VUTH20S62 3CCT Tunable (Dial switch)		48VDC			15°	3000K	1125lm
						3800K	1320lm
						5000K	1200lm
					24°	3000K	1155lm
						3800K	1365lm
						5000K	1230lm
					36°	3000K	1170lm
						3800K	1395lm
						5000K	1260lm
					50°	3000K	1065lm
						3800K	1280lm
						5000K	1140lm

Note:
1. The output data is based on the testing result of Ra90,4000K luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.


LYRA / ORION SPOTLIGHT By VONN Lighting

VUTH20S623CCT


PROJECT:	TYPE:	CATALOG#:	DATE:

PHOTOMETRICS


· Normal

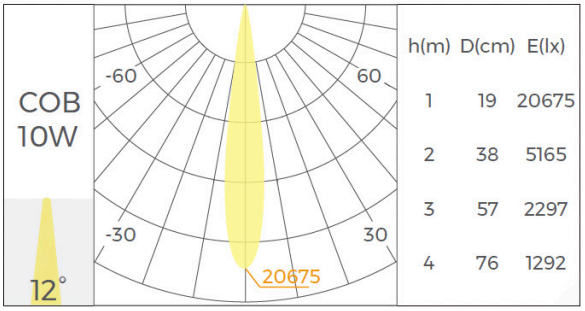


h(m)	D(cm)	E(lx)
1	19	20675
2	38	5165
3	57	2297
4	76	1292

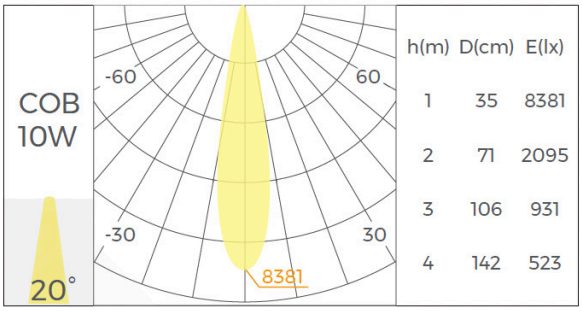

h(m)	D(cm)	E(lx)
1	35	8381
2	71	2095
3	106	931
4	142	523

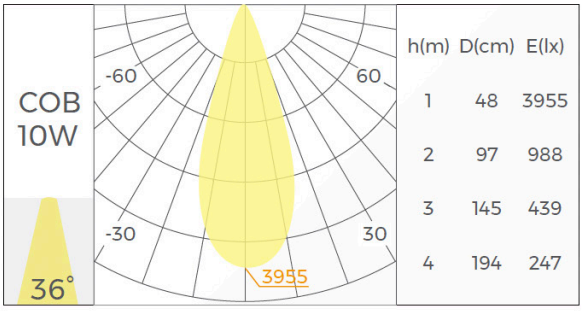


h(m)	D(cm)	E(lx)
1	48	3955
2	97	988
3	145	439
4	194	247

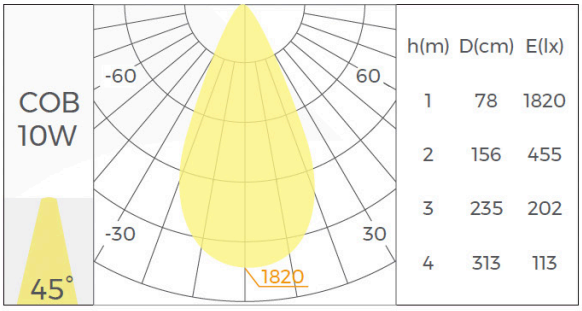


h(m)	D(cm)	E(lx)
1	78	1820
2	156	455
3	235	202
4	313	113


· 3 CCT tunable(Dial switch)

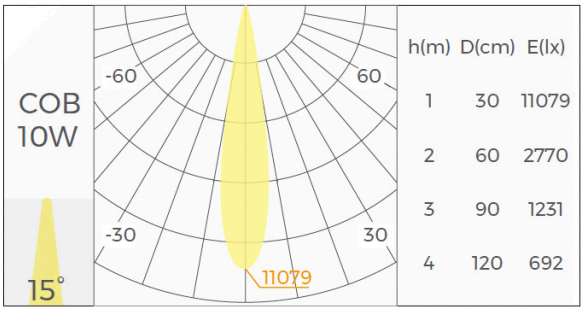


h(m)	D(cm)	E(lx)
1	30	11079
2	60	2770
3	90	1231
4	120	692

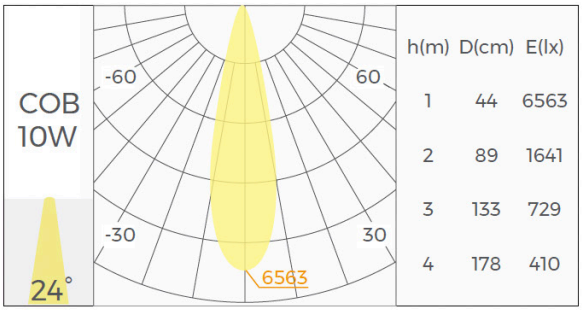

h(m)	D(cm)	E(lx)
1	44	6563
2	89	1641
3	133	729
4	178	410

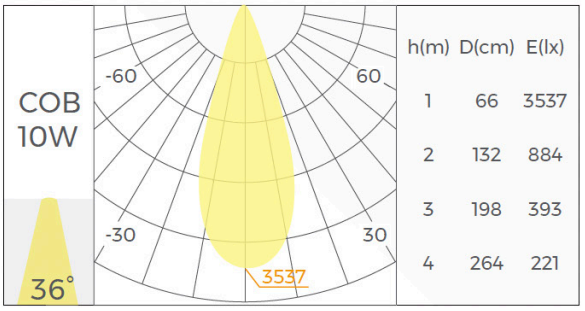

h(m)	D(cm)	E(lx)
1	66	3537
2	132	884
3	198	393
4	264	221

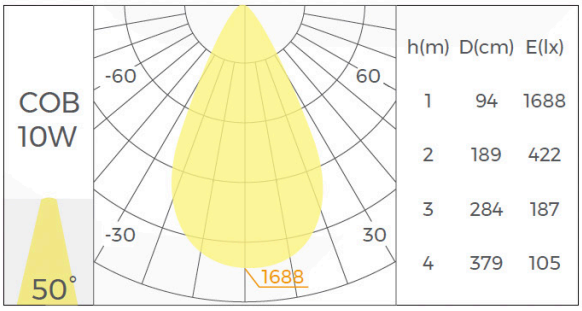

h(m)	D(cm)	E(lx)
1	94	1688
2	189	422
3	284	187
4	379	105

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.