

LYRA / ORION SPOTLIGHT

VUTH20S62

By VONN Lighting

VONN

PROJECT:

TYPE:

CATALOG#:

DATE:






DESCRIPTION

- Spotlight
- 12°/20°/30°/45°
- Black
- 62mm
- 15W
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 62*145mm
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K, 3000K-3800K-5000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 12°, 20°, 30°, 45° (Normal version)
15°, 24°, 36°, 50° (3 CCT tunable (Dial switch))
- Light efficiency: 93 LM/W
- Input voltage: DC24V-48V, DC48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

DIMENSIONS

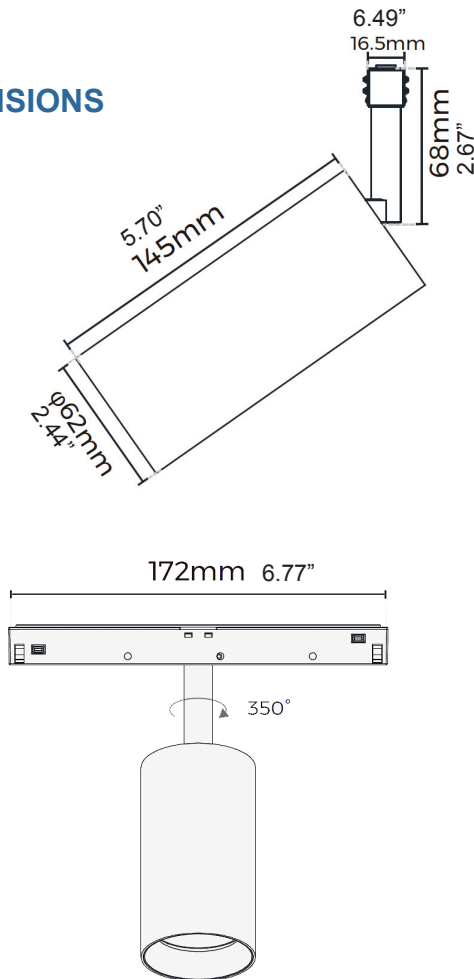

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)


***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024

VONN, LLC.
3323 NE 163rd St. PH-706
North Miami Beach, FL 33160
WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



PROJECT:

TYPE:

CATALOG#:


DATE:

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20S62	W 62mm (2.44") x H 145mm (5.70")	24-48VDC	15.0W	>90	12°	2700K	990lm
						3000K	1045lm
						4000K	1125lm
					20°	2700K	990lm
						3000K	1054lm
						4000K	1125lm
					30°	2700K	965lm
						3000K	1020lm
						4000K	1095lm
					45°	2700K	885lm
						3000K	935lm
						4000K	1005lm
VUTH20S62 3CCT Tunable (Dial switch)	W 62mm (2.44") x H 145mm (5.70")	48VDC	15.0W	>90	15°	3000K	1125lm
						3800K	1320lm
						5000K	1200lm
					24°	3000K	1155lm
						3800K	1365lm
						5000K	1230lm
					36°	3000K	1170lm
						3800K	1395lm
						5000K	1260lm
					50°	3000K	1065lm
						3800K	1280lm
						5000K	1140lm

- Note:
- 1. The output data is based on the testing result of Ra90,4000K luminaires;
 - 2. The tolerance of output data can be vary up to 10%;
 - 3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)
Theoretical Wattage: XXX W (subject to change)
***Please note lumens and wattage are subject to change and will be determined post production of the first articles.
*Any custom modifications are subject to minimum order quantity. (M.O.Q.)



LYRA / ORION SPOTLIGHT

VUTH20S62

By VONN Lighting



PROJECT:





TYPE:

CATALOG#:





DATE:

PHOTOMETRICS

· Normal

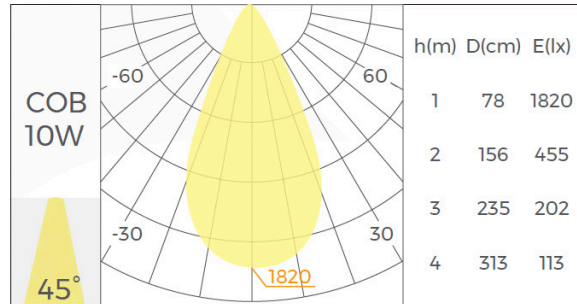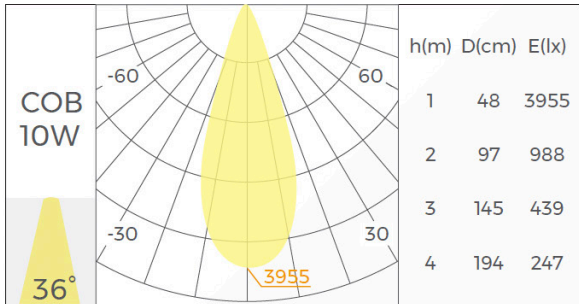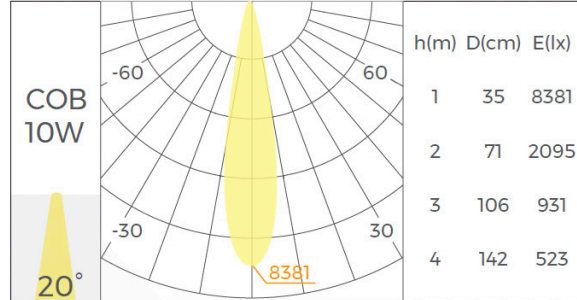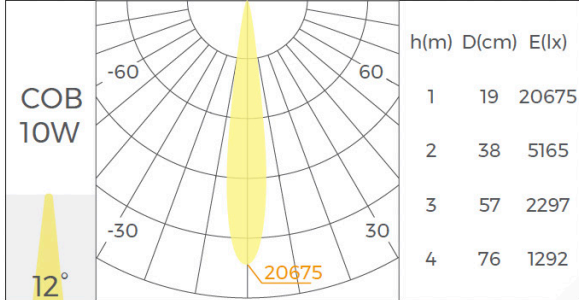

· 3 CCT tunable(Dial switch)

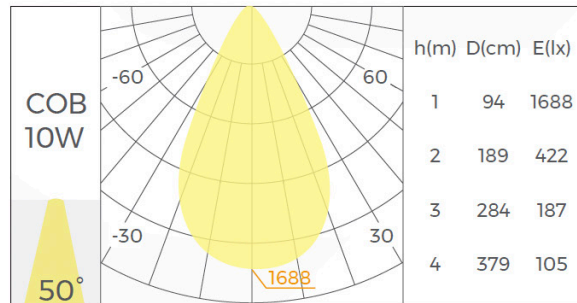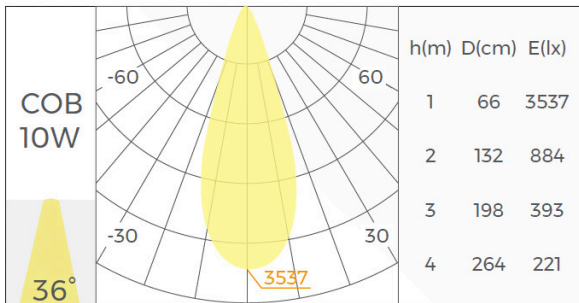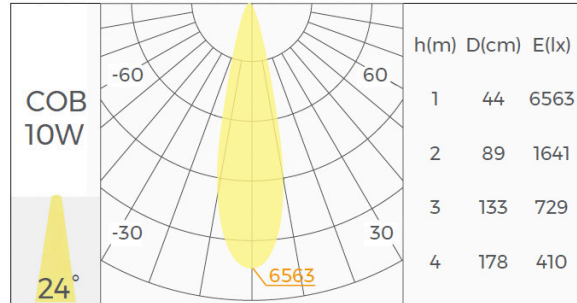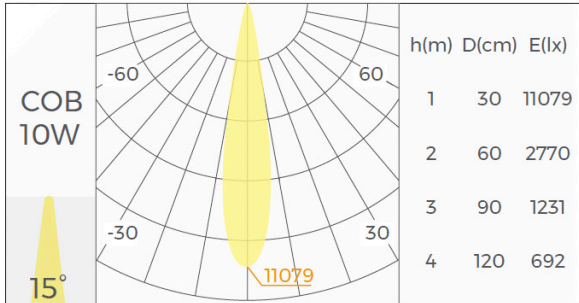

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

© VONN Lighting, 2024