

LYRA / ORION SPOTLIGHT ANGLE ADJUSTABLE

VUTH20SZ65

By VONN Lighting

VONN

PROJECT:


TYPE:

CATALOG#:

DATE:



DIMENSIONS

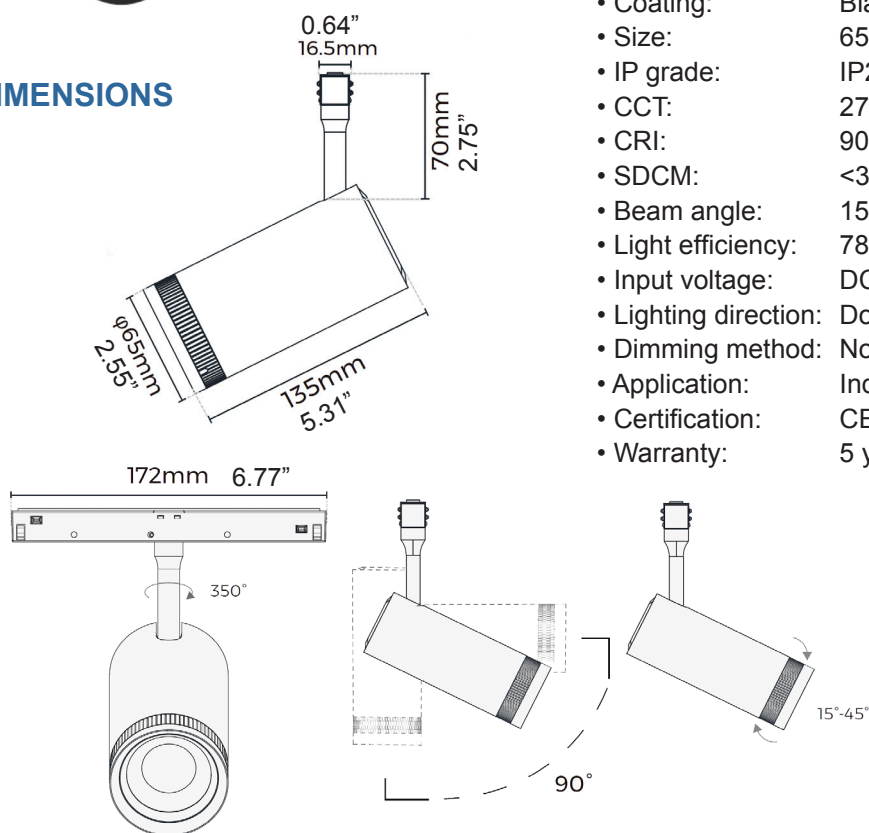

DESCRIPTION

- Spotlight
- 15°- 45° Beam Angle adjustable
- Black
- 65mm
- 12W
- 2700K/3000K/4000K
- Ra90

FEATURES

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Size: 65*135mm
- IP grade: IP20
- CCT: 2700K, 3000K, 4000K optional
- CRI: 90
- SDCM: <3 Step (ANSI)
- Beam angle: 15°- 45° Adjustable
- Light efficiency: 78 LM/W
- Input voltage: DC24V-48V
- Lighting direction: Downward
- Dimming method: Non-dimming, DALI-2, Tuya Bluetooth, CASAMBI
- Application: Indoor
- Certification: CE, UKCA, ROHS, Reach
- Warranty: 5 years

SPECIFICATION

MODEL	LENGTH	VOLTAGE	WATTAGE	CRI	BEAM ANGLE	CCT	LUMENS
VUTH20SZ65	W 65mm (2.55") x H 135mm (5.31")	24-48VDC	12.0W	>90	15°-45°	2700K	825lm
						3000K	870lm
						4000K	935lm

Note:

1. The output data is based on the testing result of Ra90,4000K luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)


© VONN Lighting, 2024

VONN, LLC.

3323 NE 163rd St. PH-706
North Miami Beach, FL 33160

WWW.VONN.COM 888.604.8666

VONN, LLC. reserves the right to make any design changes for continuous improvement which will not affect the overall appearance or performance.



PROJECT:



TYPE:

CATALOG#:

DATE:

PHOTOMETRICS

· Normal

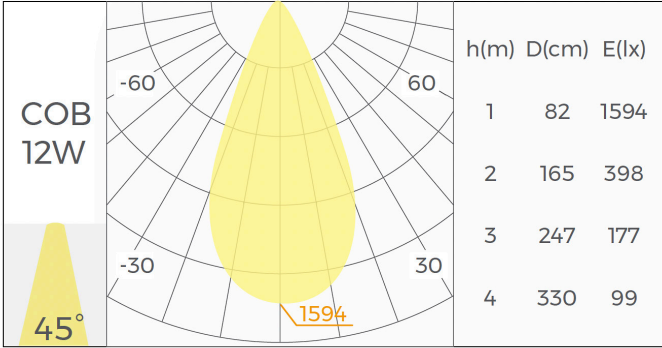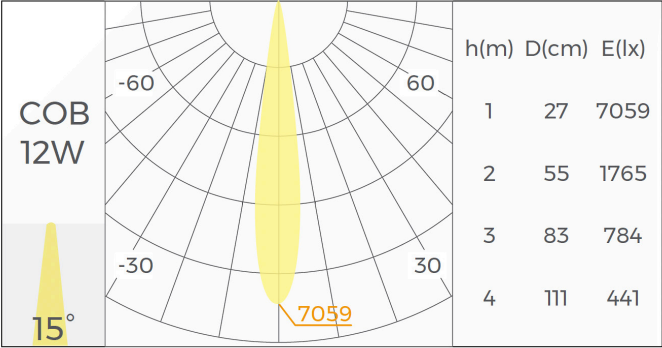

Theoretical Lumens: XXX LM (subject to change)

Theoretical Wattage: XXX W (subject to change)

***Please note lumens and wattage are subject to change and will be determined post production of the first articles.

*Any custom modifications are subject to minimum order quantity. (M.O.Q.)

