



MFP™-100

MAGNETIC FLUX SENSOR FOR TURBO-GENERATORS

GENERAL SPECIFICATIONS

Operation

- Output: Magnetic flux to voltage
- Interchangeability: < 1% F.S.R.
- Short circuit protection: Built-in

Connection

- Integral cable
 - Type: Shielded twisted pair
 - Connector: M12 shielded, straight male (field assembly required)
- Max. cable length (integral + extension): 100 m [328 ft]

Environment


- Temperature range
 - Operating: 0 to 125°C [32 to 257°F]

Physical Characteristics

- Sensor material: Glass-reinforced epoxy and semi-conductive material
- Outer jacket material: PTFE
- Integral cable
 - Diameter: 2.9 mm [114 mils]
 - Length: 10 m [32.8 ft]

F.S.R.: Calculated on a full scale range

DIMENSIONS

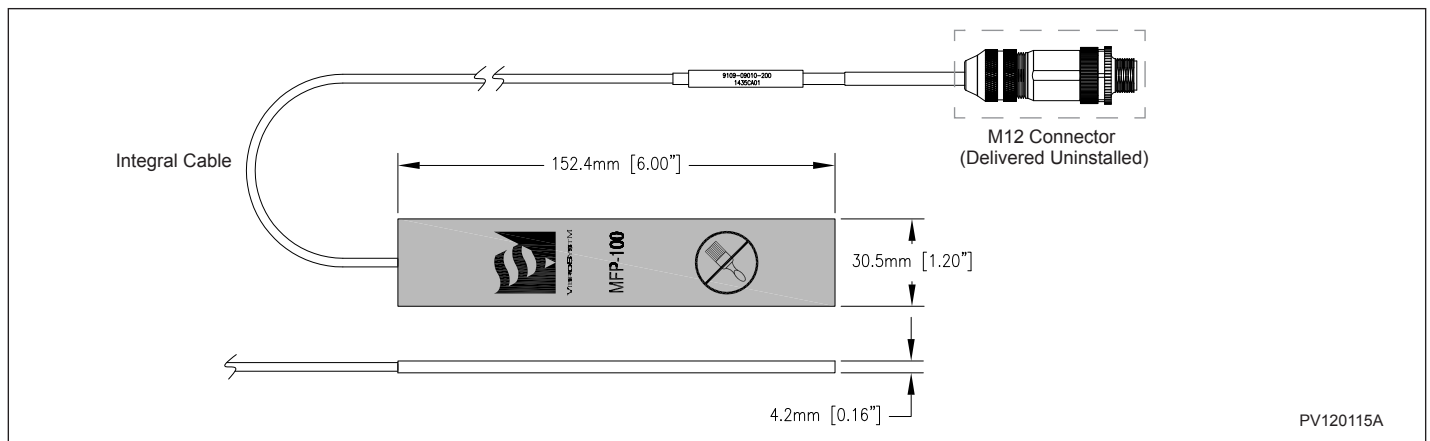

PRODUCT IDENTIFICATION

Product Number	Description
VSM-MFP100/TURBO	MFP-100 Magnetic Flux Sensor for Turbo-Generators

Publication: 2018-12-10