


Classic Line L10direct

MATRIX
MIRRORS

Made in the USA

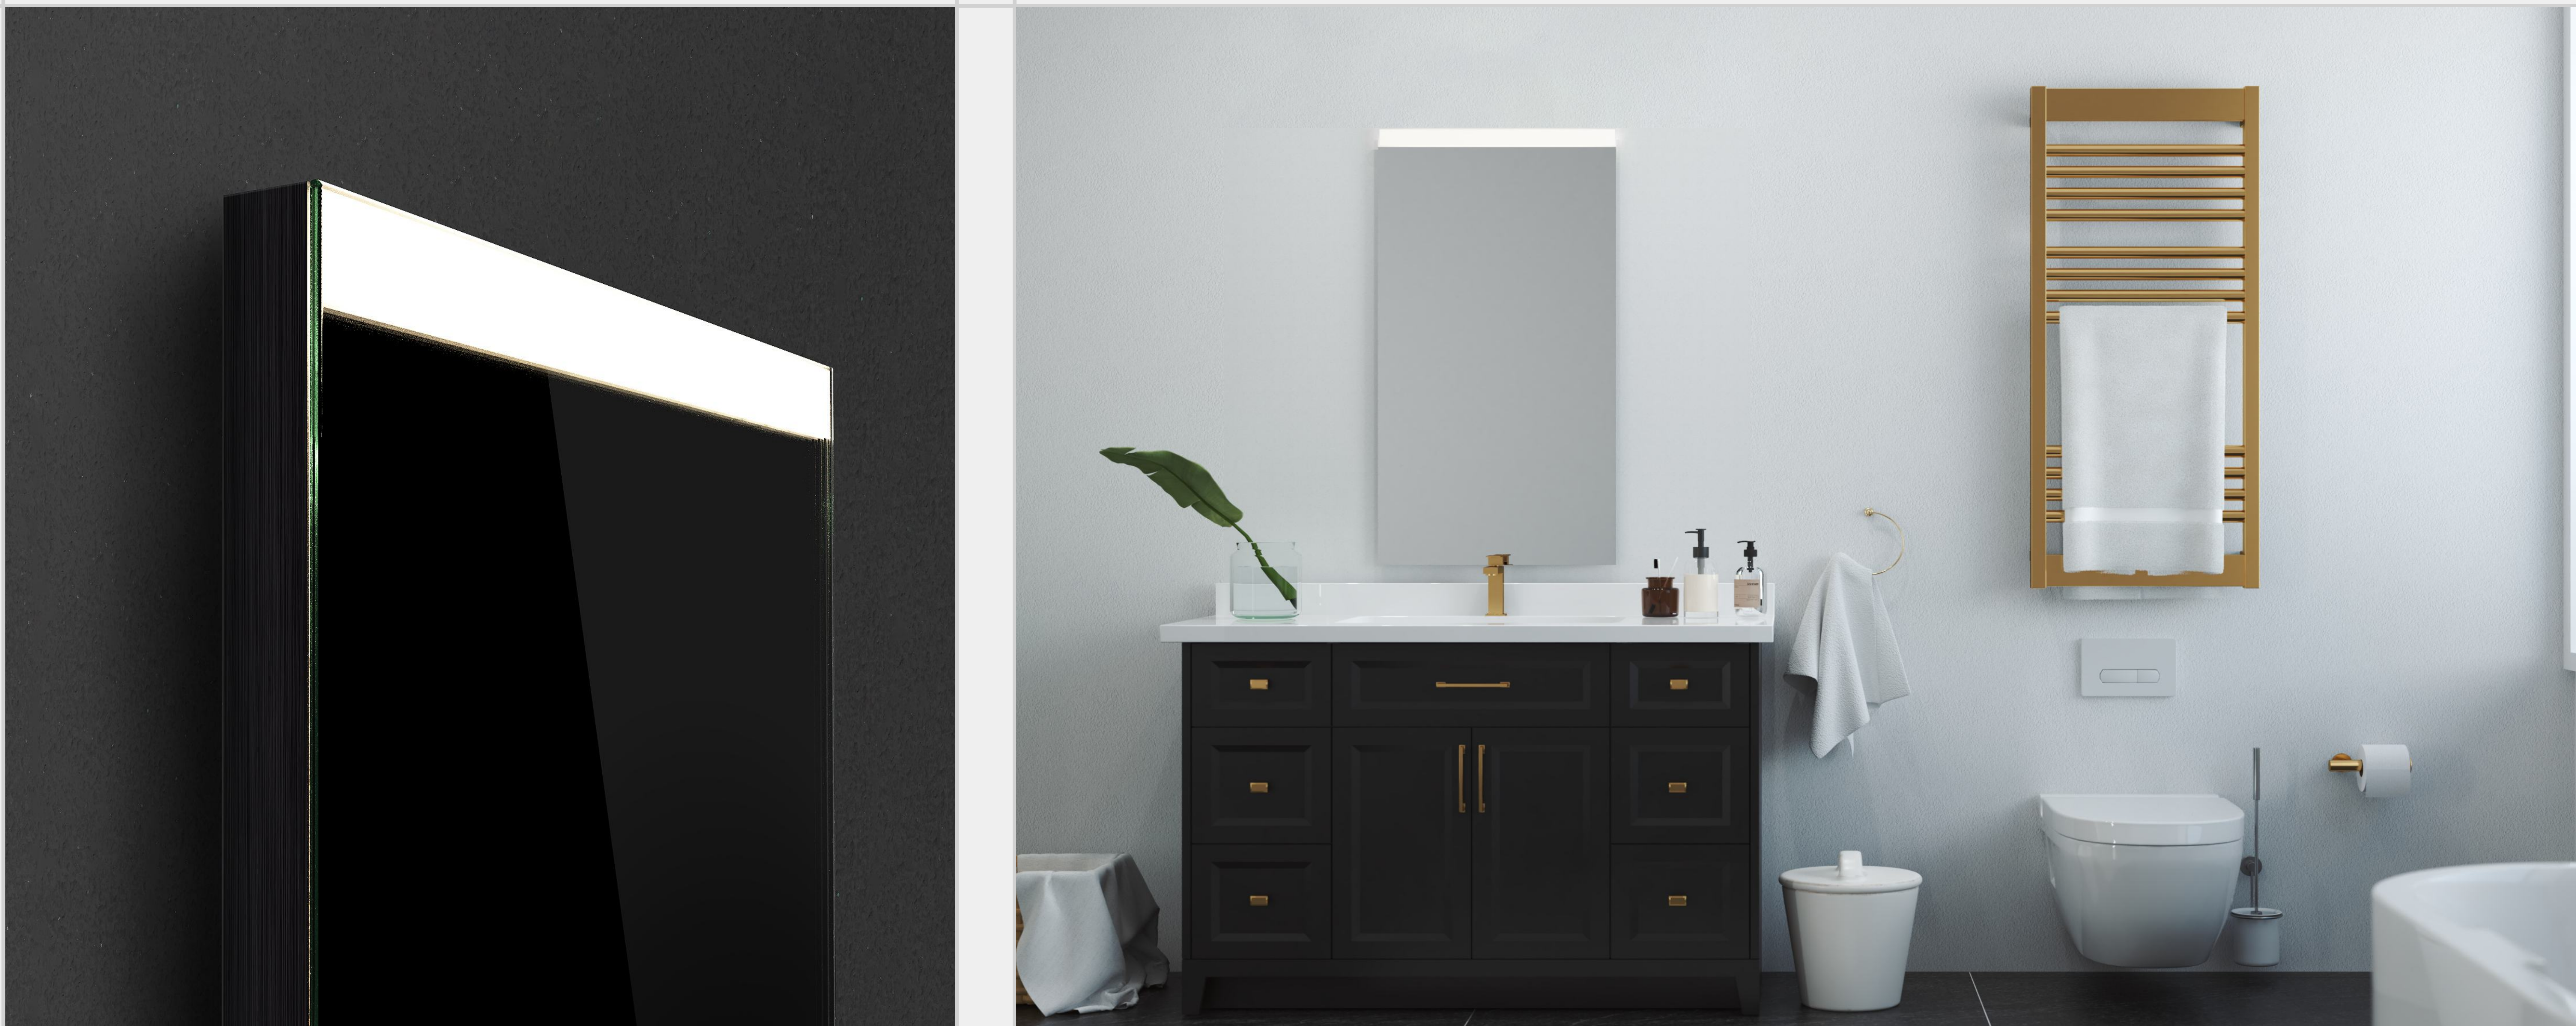

ITEM CODE

L 1 0 d

1 2 3 4 5 6 7 8 9



Additional Custom Specification Notes 10

(specify the accurate size in additional custom specification notes)

- 1 Types

 - L - Classic Line
- 2 Styles

 - 10 - Single Short Side Edge Frost
- 3 Lighting Styles

 - d - Direct Light
- 4 Glass Sizes

1836 - 18" x 36" 2436 - 24" x 36" 2448 - 24" x 48" 2460 - 24" x 60"	3042 - 30" x 42" 3048 - 30" x 48" 3060 - 30" x 60" 3072 - 30" x 72"	3232 - 32" x 32" 3636 - 36" x 36" 3642 - 36" x 42" 3648 - 36" x 48"	3660 - 36" x 60" 3672 - 36" x 72" 4242 - 42" x 42" 4254 - 42" x 54"	4260 - 42" x 60" 4284 - 42" x 84" - Custom (Ex: 3173 - 31.4" x 72.5") (specify the accurate size in additional custom specification notes)
---	---	---	---	--
- 5 Outputs

 - S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
 - H - High Output
(750 lumens/ft; 6 watts/ft)

Account for approximately 50% -60% light loss factor

 - 60% for direct lighting
 - 50% for indirect lighting

Use frost size on page 2 to calculate linear footage
- 6 Color Temperatures

 - 00 - Color Switchable 2700k-6500k (90+ CRI)
(Only available with high output with Touch Sensor accessory)
 - 00 - Color Switchable 1800k-6500k (90+ CRI)
(Only available with high output with CCT Sync accessory)
 - 27 - 2700k (90+ CRI)
 - 30 - 3000k (90+ CRI)
 - 35 - 3500k (90+ CRI)
 - 40 - 4000k (90+ CRI)
 - 50 - 5000k (90+ CRI)
- 7 Drivers

 - V - 100-277VAC 0-10 Dimmable
 - E - 100-277VAC ELV Dimmable
 - N - 100-277VAC Non-Dimming
(Mirrors with touch sensor have to use a non-dimming driver)
- 8 Mounting

 - 1 - Vertical
 - 2 - Horizontal
- 9 Accessories

- NA - None - TS - Touch Sensor - AF - Anti-Fog Demister - NL - Night Light	- AT - Anti-Fog & Touch Sensor - NT - Night Light & Touch Sensor - AN - Anti Fog & Night Light - AL - Anti-Fog, Night Light & Touch Sensor	- CT - CCT Sync Switch - CF - CCT Sync & Anti-Fog - CN - CCT Sync & Night Light - CL - CCT Sync, Anti-Fog & Night Light
---	--	---
- 10 Additional Custom Specification Notes

Low-Iron Glass	Powder Coated Chassis	Antimicrobial Powder Coat	Custom Inset & Frost Sizes (Up to 2 inches)
--	---	---	---

Classic Line L10direct



Made in the USA

ACCESSORY DESCRIPTIONS

Anti-Fog Demister (120v power supply)

Available Sizes

- 8" x 30"
- 12" x 18"
- 11" x 14"
- 18" x 22"
- 13" x 14"
- 18" x 34"

Controllers

Touch Sensors


- **On/Off Dim**
 - White when Lights ON
 - Orange when Lights OFF
 - Hold 2 seconds to turn Touch Sensor Light OFF
- Color Temperature Switchable between **2700k to 6500k**
- **Custom Logo** available

Direct/ Indirect Styles




Direct/ Indirect Light


Direct & Indirect Styles

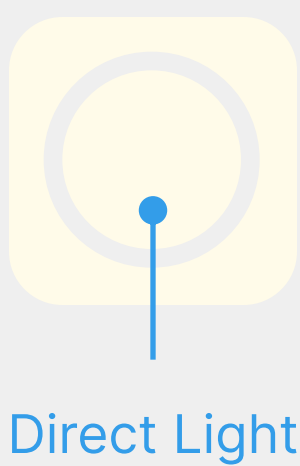

Direct Light

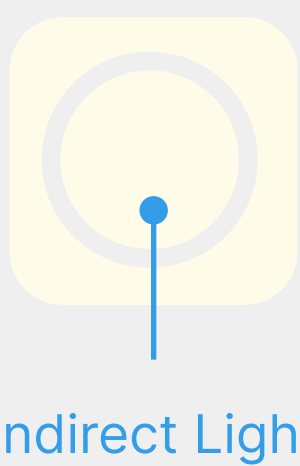


Indirect Light



CCT Sync Switch

- **Independent control** of color temperature and light intensity
- Color Temperature Switchable between **1800k to 6500k**
- **Dimensions:** 1.7"W x 4.15"H x 0.2"D

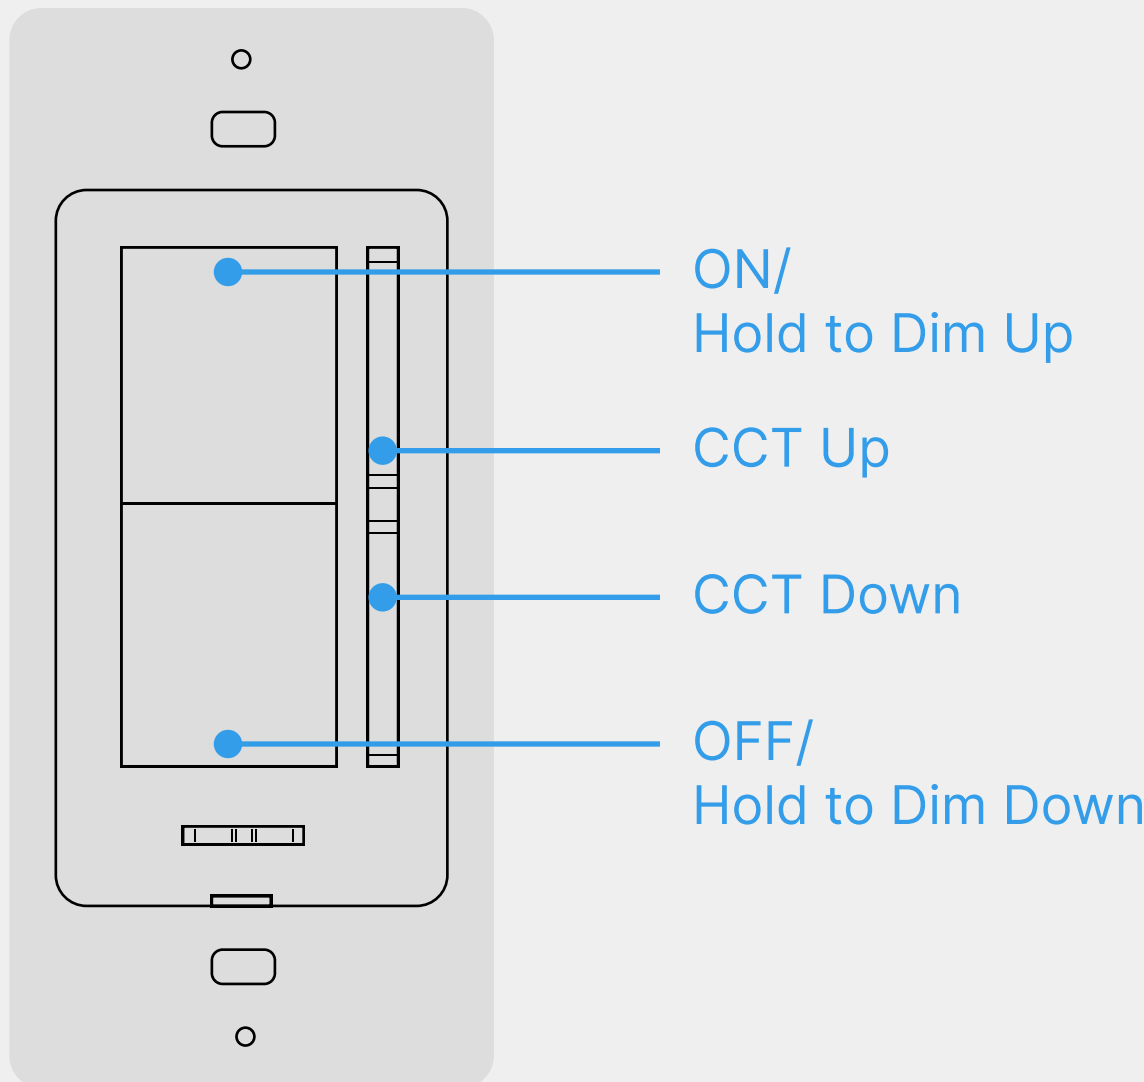

STANDARD SIZE (Dimensions in red are set)


UNIT: inch

Frost: 1.50
Inset: N/A


Depth: 1.625

Glass Width: X
Glass Height: Y

Full Width: X
Full Height: Y



FRONT

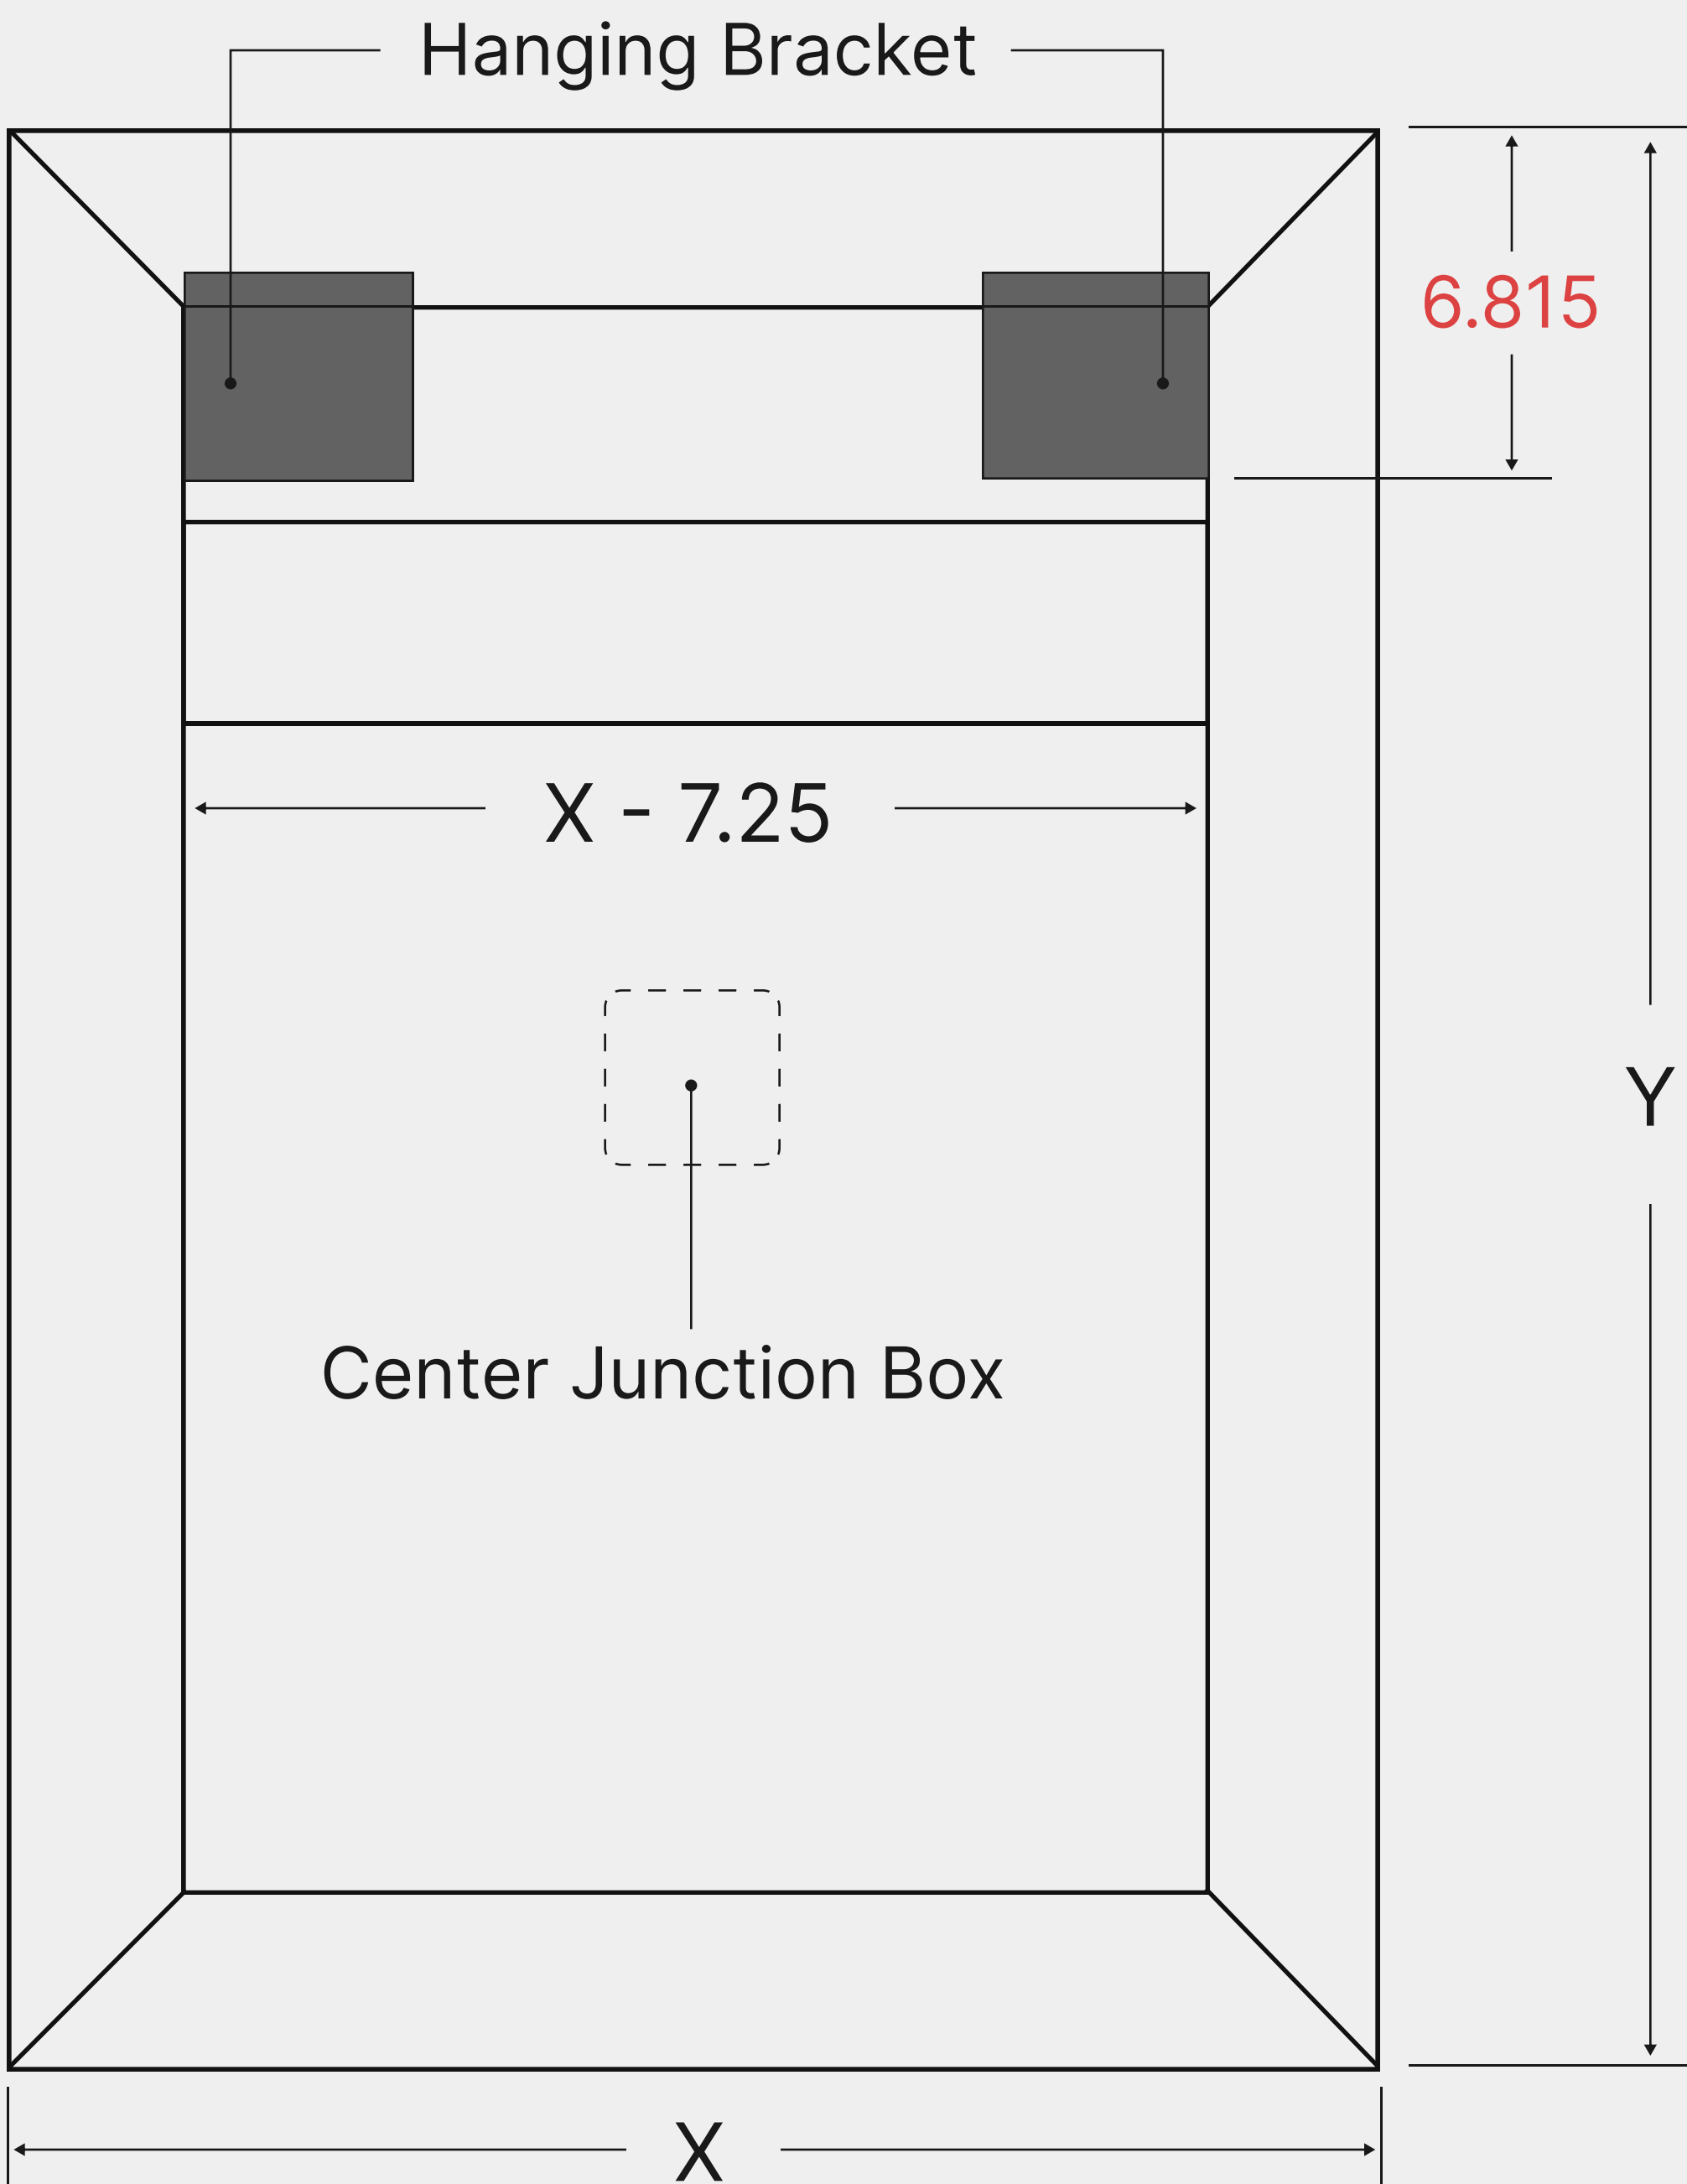

BACK



SIDE

----- Glass
———— Chassis

Please punch holes **after** the dashed line

Please punch holes **before** the dashed line