

Classic Line L08i_{indirect}



Made in the USA



ITEM CODE

L08i

1

2

3

4

5

6

7

8

9



Additional Custom Specification Notes 10

(specify the accurate size in additional custom specification notes)

1 Types

- L - Classic Line

2 Styles

- 08 - Single Long Side Edge Frost

3 Lighting Styles

- i - Indirect Light

4 Glass Sizes

- 1836 - 18" x 36"
 - 2436 - 24" x 36"
 - 2448 - 24" x 48"
 - 2460 - 24" x 60"
- 3042 - 30" x 42"
 - 3048 - 30" x 48"
 - 3060 - 30" x 60"
 - 3072 - 30" x 72"
- 3232 - 32" x 32"
 - 3636 - 36" x 36"
 - 3642 - 36" x 42"
 - 3648 - 36" x 48"
- 3660 - 36" x 60"
 - 3672 - 36" x 72"
 - 4242 - 42" x 42"
 - 4254 - 42" x 54"
- 4260 - 42" x 60"
 - 4284 - 42" x 84"
 - Custom (Ex: 3173 - 31.4" x 72.5")
(specify the accurate size in additional custom specification notes)

5 Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

Account for approximately 50% -60% light loss factor

- 60% for direct lighting
- 50% for indirect lighting

Use frost size on page 2 to calculate linear footage

6 Color Temperatures

- 00 - Color Switchable 2700k-6500k (90+ CRI)
(Only available with high output with Touch Sensor accessory)
- 00 - Color Switchable 1800k-6500k (90+ CRI)
(Only available with high output with CCT Sync accessory)
- 27 - 2700k (90+ CRI)
- 30 - 3000k (90+ CRI)
- 35 - 3500k (90+ CRI)
- 40 - 4000k (90+ CRI)
- 50 - 5000k (90+ CRI)

7 Drivers

- V - 100-277VAC 0-10 Dimmable
- E - 100-277VAC ELV Dimmable
- N - 100-277VAC Non-Dimming
(Mirrors with touch sensor have to use a non-dimming driver)

8 Mounting

- 1 - Vertical
- 2 - Horizontal

9 Accessories

- NA - None
 - TS - Touch Sensor
 - AF - Anti-Fog Demister
 - NL - Night Light
- AT - Anti-Fog & Touch Sensor
 - NT - Night Light & Touch Sensor
 - AN - Anti Fog & Night Light
 - AL - Anti-Fog, Night Light & Touch Sensor

- CT - CCT Sync Switch
- CF - CCT Sync & Anti-Fog
- CN - CCT Sync & Night Light
- CL - CCT Sync, Anti-Fog & Night Light

10 Additional Custom Specification Notes

- Low-Iron Glass
- Powder Coated Chassis
- Antimicrobial Powder Coat
- Custom Inset & Frost Sizes (Up to 2 inches)

Classic Line L08i_{indirect}



Made in the USA

ACCESSORY DESCRIPTIONS

Anti-Fog Demister (120v power supply)

Available Sizes

- 8" x 30"
- 12" x 18"
- 11" x 14"
- 18" x 22"
- 13" x 14"
- 18" x 34"

Controllers



Touch Sensors

- On/Off Dim
 - White when Lights ON
 - Orange when Lights OFF
 - Hold 2 seconds to turn Touch Sensor Light OFF
- Color Temperature Switchable between **2700k to 6500k**
- Custom Logo available

Direct/ Indirect Styles




Direct & Indirect Styles

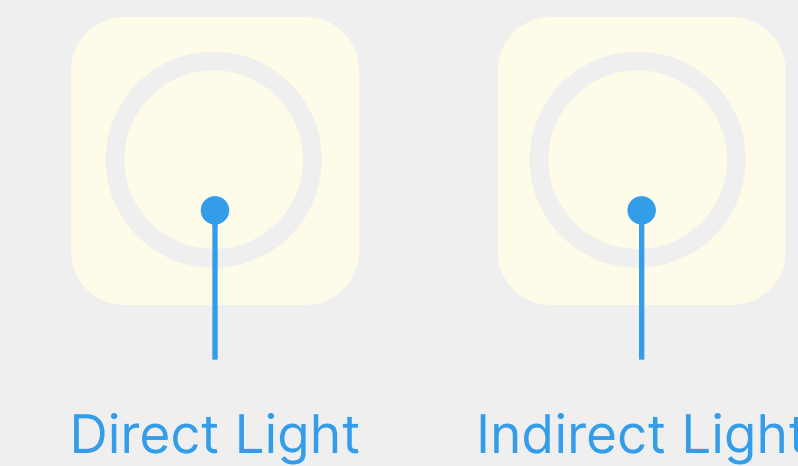

CCT Sync Switch

- Independent control of color temperature and light intensity
- Color Temperature Switchable between **1800k to 6500k**
- Dimensions: 1.7"W x 4.15"H x 0.2"D

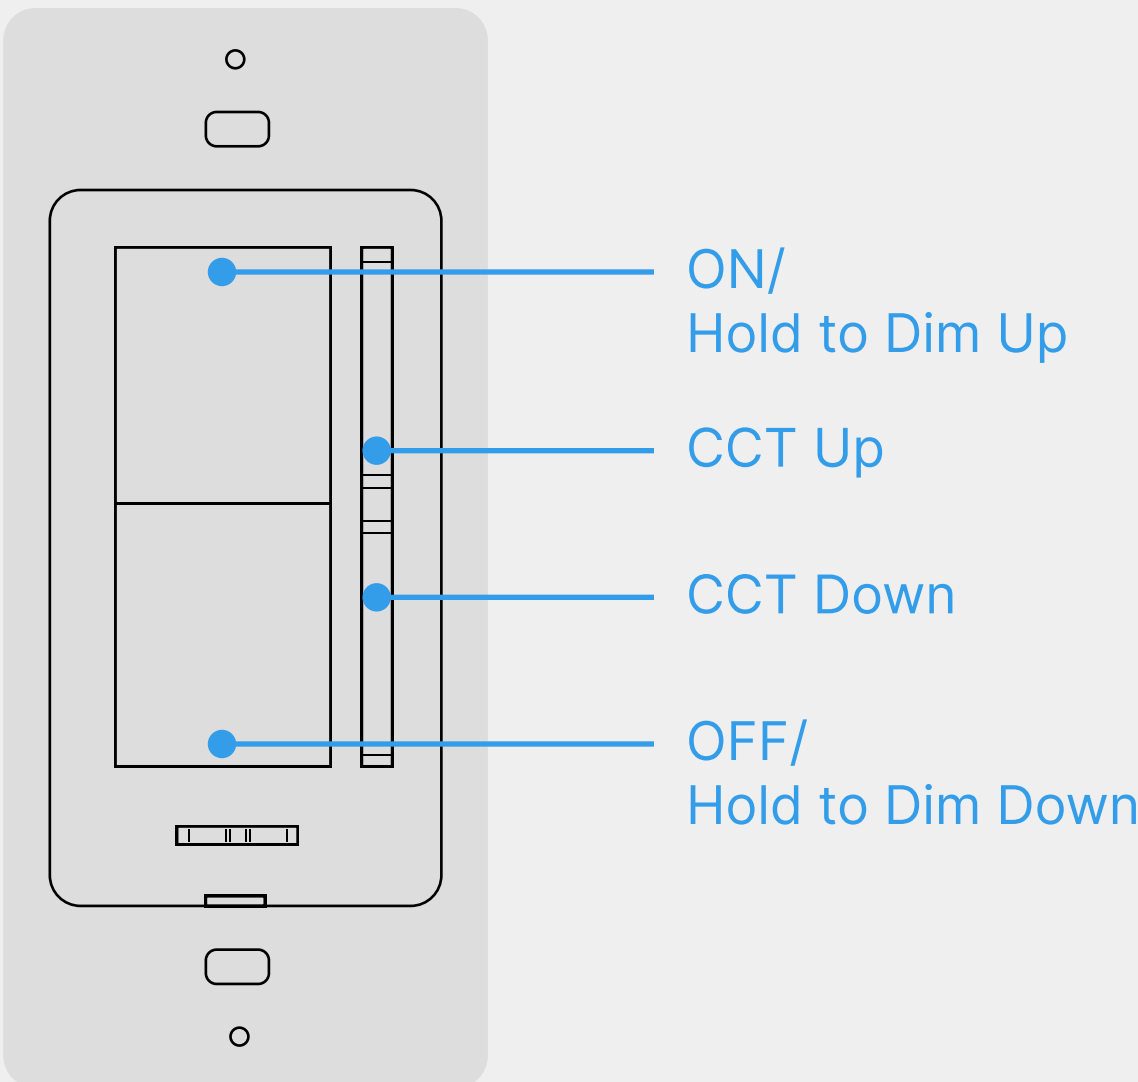


STANDARD SIZE (Dimensions in red are set)

UNIT: inch

Frost: 1.50	Depth: 1.625	Glass Width: X	Full Width: X
Inset: N/A		Glass Height: Y	Full Height: Y

----- Glass
———— Chassis

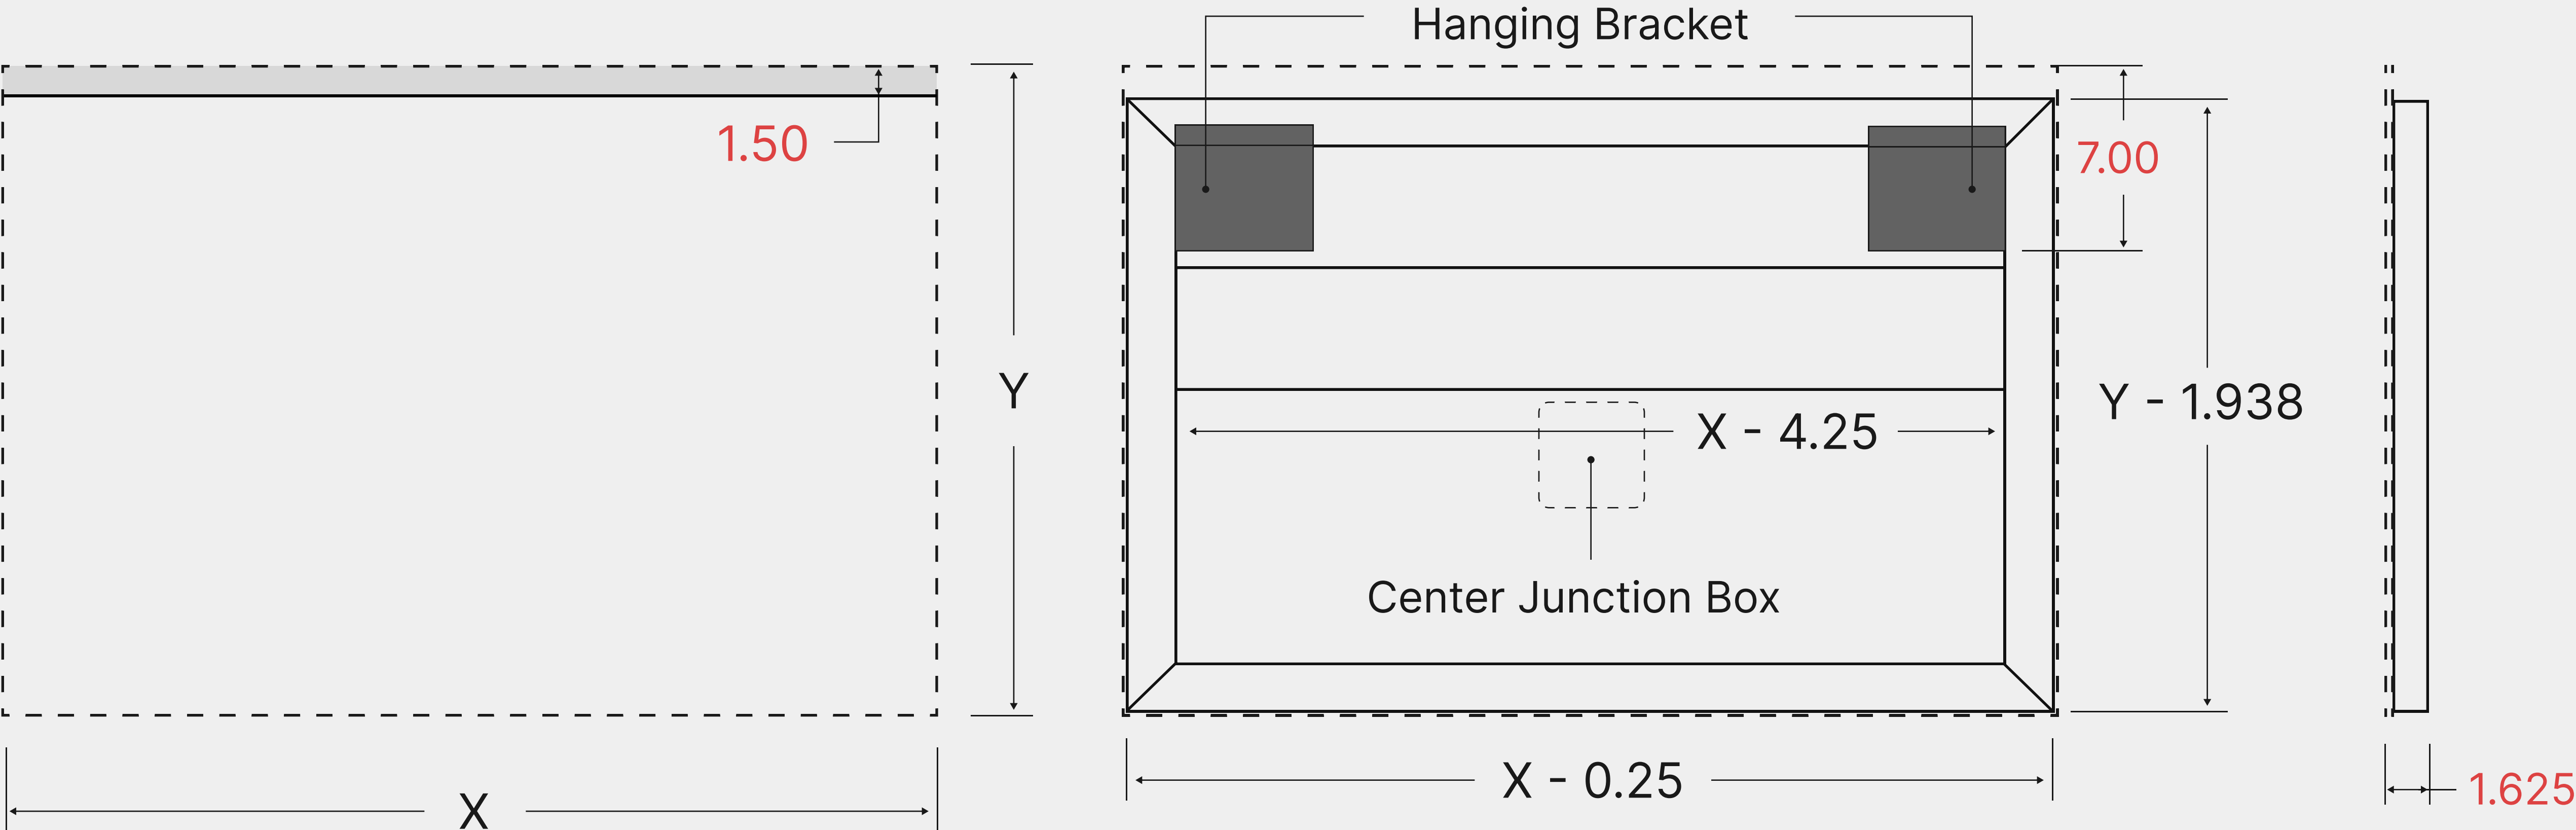

FRONT BACK SIDE

Please punch holes after the dashed line

Please punch holes before the dashed line