

Classic Line L05i_{ndirect}

MATRIX
MIRRORS

 Made in the USA



ITEM CODE

L 0 5 i

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨



Additional Custom Specification Notes ⑩

(specify the accurate size in additional custom specification notes)

① Types

- L - Classic Line

② Styles

- 05 - No Frost

③ Lighting Styles

- i - Indirect Light

④ Glass Sizes

- | | | | | |
|---|---|---|---|--|
| <ul style="list-style-type: none">1836 - 18" x 36"2436 - 24" x 36"2448 - 24" x 48"2460 - 24" x 60" | <ul style="list-style-type: none">3042 - 30" x 42"3048 - 30" x 48"3060 - 30" x 60"3072 - 30" x 72" | <ul style="list-style-type: none">3232 - 32" x 32"3636 - 36" x 36"3642 - 36" x 42"3648 - 36" x 48" | <ul style="list-style-type: none">3660 - 36" x 60"3672 - 36" x 72"4242 - 42" x 42"4254 - 42" x 54" | <ul style="list-style-type: none">4260 - 42" x 60"4284 - 42" x 84"Custom (Ex: 3173 - 31.4" x 72.5")
(specify the accurate size in additional custom specification notes) |
|---|---|---|---|--|

⑤ Outputs

- S - Standard Output
(550 lumens/ft; 4.5 watts/ft)
- H - High Output
(750 lumens/ft; 6 watts/ft)

Account for approximately 50% -60% light loss factor

- 60% for direct lighting
- 50% for indirect lighting

Use frost size on page 2 to calculate linear footage

⑥ Color Temperatures

- 00 - Color Switchable 2700k-6500k (90+ CRI)
(Only available with high output with **Touch Sensor** accessory)
- 00 - Color Switchable 1800k-6500k (90+ CRI)
(Only available with high output with **CCT Sync** accessory)
- 27 - 2700k (90+ CRI)
- 30 - 3000k (90+ CRI)
- 35 - 3500k (90+ CRI)
- 40 - 4000k (90+ CRI)
- 50 - 5000k (90+ CRI)

⑦ Drivers

- V - 100-277VAC 0-10 Dimmable
- E - 100-277VAC ELV Dimmable
- N - 100-277VAC Non-Dimming
(Mirrors with touch sensor have to use a non-dimming driver)

⑧ Mounting

- 1 - Vertical
- 2 - Horizontal

⑨ Accessories

- | | |
|---|--|
| <ul style="list-style-type: none">NA - NoneTS - Touch SensorAF - Anti-Fog DemisterNL - Night Light | <ul style="list-style-type: none">AT - Anti-Fog & Touch SensorNT - Night Light & Touch SensorAN - Anti Fog & Night LightAL - Anti-Fog, Night Light & Touch Sensor |
|---|--|

- CT - CCT Sync Switch
- CF - CCT Sync & Anti-Fog
- CN - CCT Sync & Night Light
- CL - CCT Sync, Anti-Fog & Night Light

⑩ Additional Custom Specification Notes

- | | | | |
|--|---|---|---|
| <ul style="list-style-type: none">Low-Iron Glass | <ul style="list-style-type: none">Powder Coated Chassis | <ul style="list-style-type: none">Antimicrobial Powder Coat | <ul style="list-style-type: none">Custom Inset & Frost Sizes (Up to 2 inches) |
|--|---|---|---|

Classic Line L05i_{ndirect}



Made in the USA

ACCESSORY DESCRIPTIONS

Anti-Fog Demister (120v power supply)

Available Sizes

- 8" x 30"
- 12" x 18"
- 11" x 14"
- 18" x 22"
- 13" x 14"
- 18" x 34"

Controllers



Touch Sensors

- **On/Off Dim**
 - White when Lights ON
 - Orange when Lights OFF
 - Hold 2 seconds to turn Touch Sensor Light OFF
- Color Temperature Switchable between **2700k to 6500k**
- **Custom Logo** available

Direct/ Indirect Styles




Direct & Indirect Styles

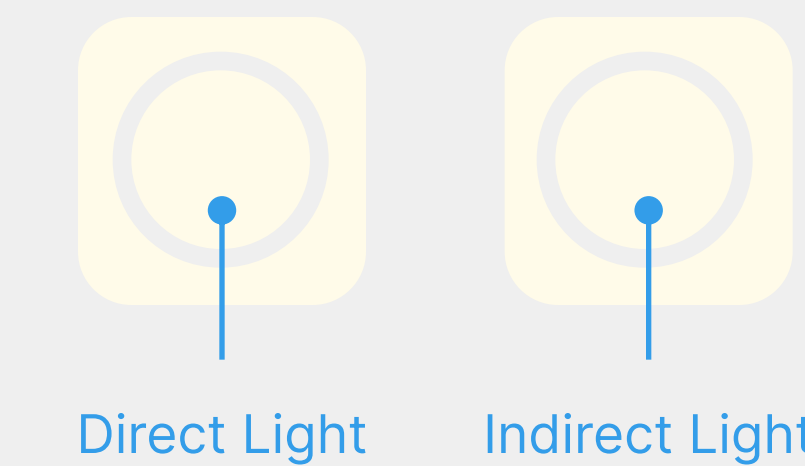

CCT Sync Switch


- **Independent control** of color temperature and light intensity
- Color Temperature Switchable between **1800k to 6500k**
- **Dimensions:** 1.7"W x 4.15"H x 0.2"D

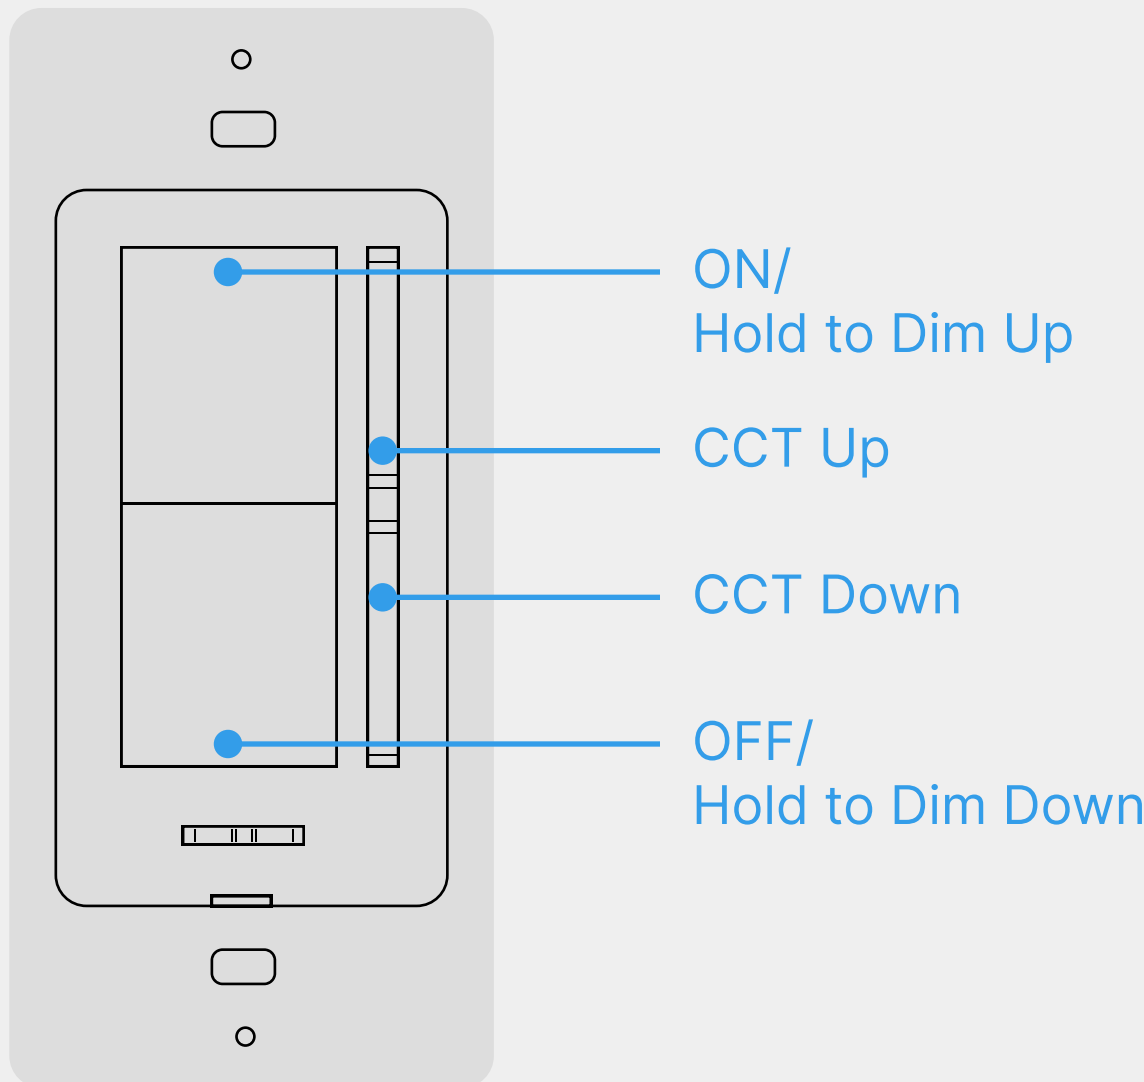

STANDARD SIZE (Dimensions in red are set)

UNIT: inch

Frost: N/A	Depth: 1.625	Glass Width: X	Full Width: X
Inset: N/A		Glass Height: Y	Full Height: Y

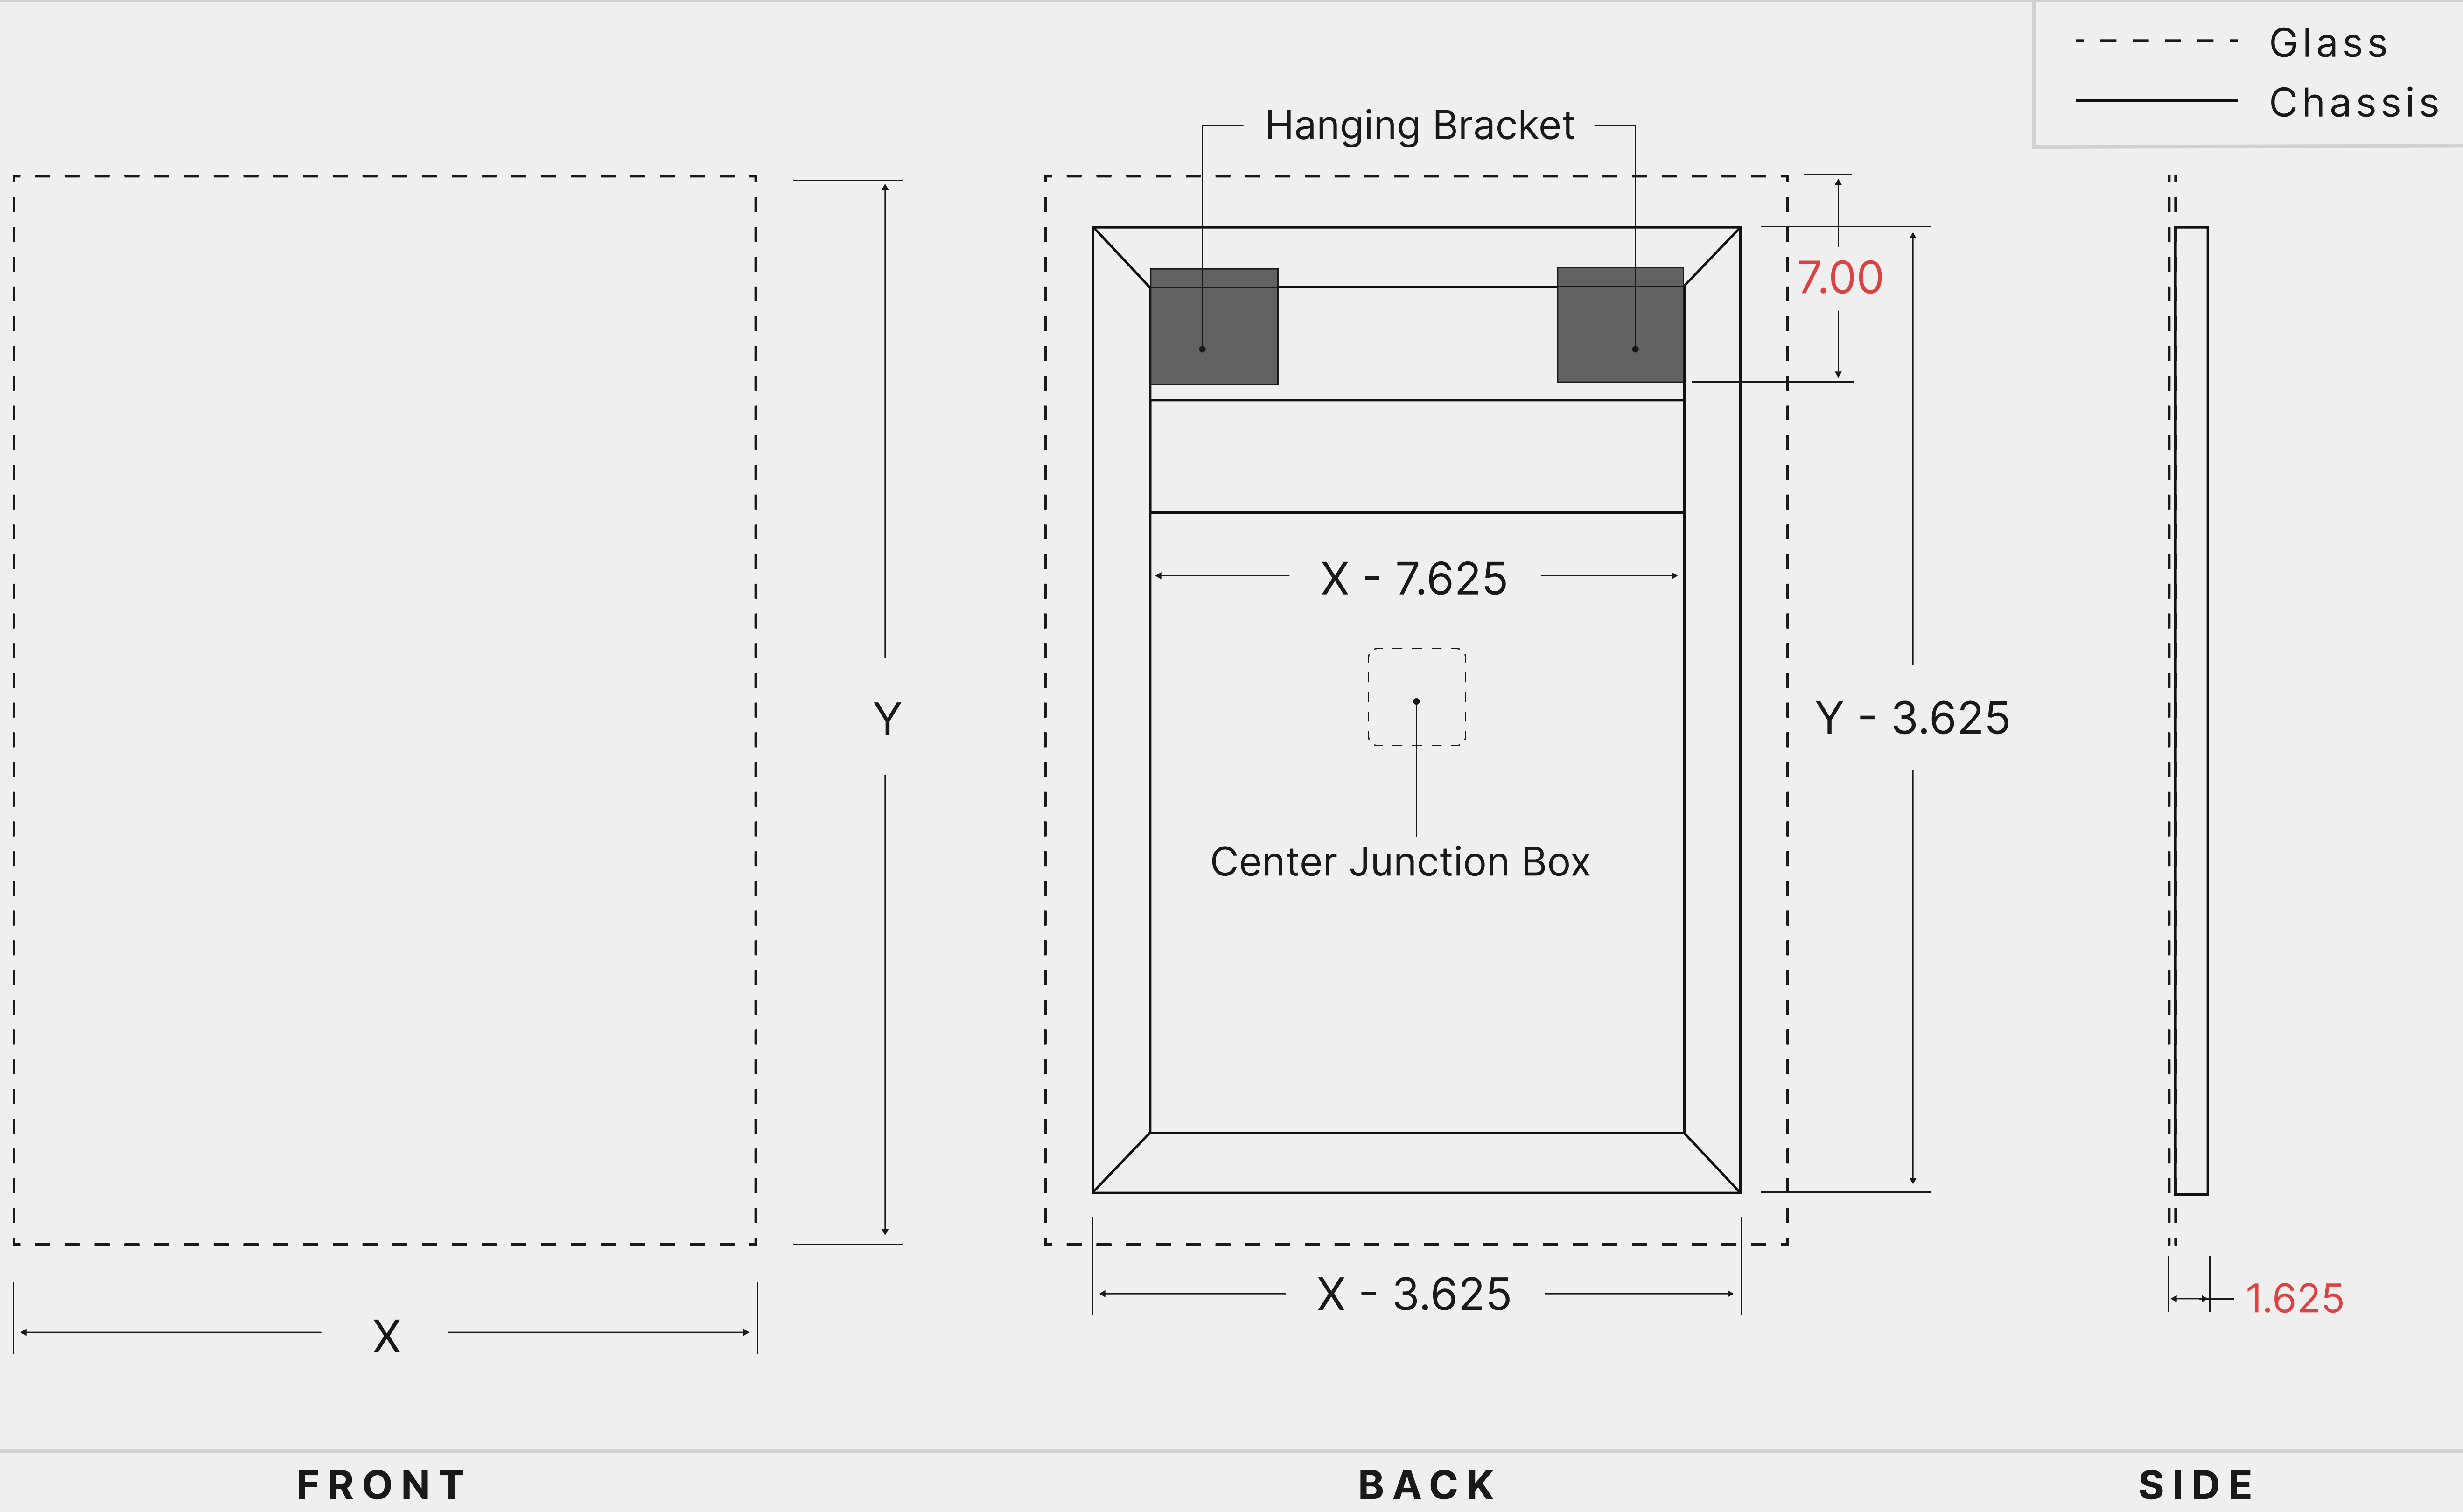

Please punch holes **after** the dashed line

Please punch holes **before** the dashed line