

HBO Series

Features


- 125°C, 4,000 hours assured
- Low ESR and High ripple current
- RoHS compliance

Marking color: Dark Green

Specifications

Items	Performance																													
Category Temperature Range	-55°C ~ +125°C																													
Capacitance Tolerance	±20% (at 120 Hz, 20°C)																													
Leakage Current (at 20°C)	I = 0.01CV or 3 (μ A) whichever is greater (after 2 minutes) Where, C = rated capacitance in μF, V = rated DC working voltage in V																													
Tanδ (at 120 Hz, 20°C)	See Standard Ratings																													
Endurance	<table><tr><td>Test Time</td><td colspan="4">4,000 Hrs</td></tr><tr><td>Capacitance Change</td><td colspan="4">Within ±30% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>ESR</td><td colspan="4">Less than 200% of specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Test Time	4,000 Hrs				Capacitance Change	Within ±30% of initial value				Tanδ	Less than 200% of specified value				ESR	Less than 200% of specified value				Leakage Current	Within specified value			
	Test Time	4,000 Hrs																												
	Capacitance Change	Within ±30% of initial value																												
	Tanδ	Less than 200% of specified value																												
	ESR	Less than 200% of specified value																												
Leakage Current	Within specified value																													
	* The above specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 4,000 hours at 125°C.																													
Shelf Life Test	* After storage for 1,000 hours at 125 ± 2°C with no voltage applied and then being stabilized at 20°C, capacitors shall meet the limits specified in Endurance. (With voltage treatment)																													
Resistance to Soldering Heat (Please refer to page 26 for reflowsoldering conditions)	<table><tr><td>Capacitance Change</td><td colspan="4">Within ±10% of initial value</td></tr><tr><td>Tanδ</td><td colspan="4">Within specified value</td></tr><tr><td>ESR</td><td colspan="4">Within specified value</td></tr><tr><td>Leakage Current</td><td colspan="4">Within specified value</td></tr></table>					Capacitance Change	Within ±10% of initial value				Tanδ	Within specified value				ESR	Within specified value				Leakage Current	Within specified value								
	Capacitance Change	Within ±10% of initial value																												
	Tanδ	Within specified value																												
	ESR	Within specified value																												
Leakage Current	Within specified value																													
Ripple Current and Frequency Multipliers																														
	Frequency (Hz)	120 ≤ f < 1k	1k ≤ f < 10k	10k ≤ f < 100k	100k ≤ f < 500k																									
	Multiplier	0.10	0.3	0.6	1.0																									

Diagram of Dimensions

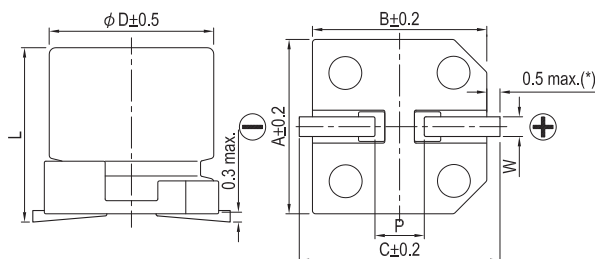

Lead Spacing and Diameter


Unit: mm

ϕD	L	A	B	C	W	P ± 0.2
6.3	5.8 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
6.3	7.7 ± 0.3	6.6	6.6	7.2	0.5 ~ 0.8	2.0
8	10.0 ± 0.5	8.3	8.3	9.0	0.7 ~ 1.1	3.1
10	10.0 ± 0.5	10.3	10.3	11.0	0.7 ~ 1.3	4.7


(*): For 6.3 ϕ is 0.4 max.

Marking

$\phi D = 6.3$

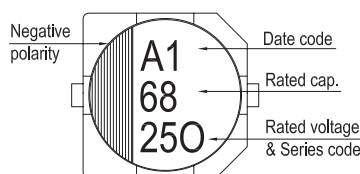

$\phi D = 8 \sim 10$

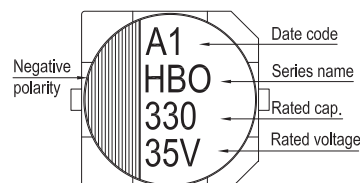

Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 100k Hz, 125°C

Standard Ratings

Rated Volt. (V)	Surge Voltage (V)	Capacitance (μF)	Size $\phi D \times L$ (mm)	Tan δ (120 Hz, 20°C)	L C (μA)	E S R (m Ω /at 100kHz, 20°C max.)	Rated R. C. (mA/rms at 100k Hz, 125°C)
25V (1E)	28.8	68	6.3 $\times$ 5.8	0.14	17	50	1,300
		82	6.3 $\times$ 5.8		20.5	50	1,300
		150	6.3 $\times$ 7.7		37.5	30	1,800
		270	8 $\times$ 10		67.5	27	2,000
		470	10 $\times$ 10		117	20	2,800
35V (1V)	40.3	56	6.3 $\times$ 5.8	0.12	19.6	60	1,200
		100	6.3 $\times$ 7.7		35	35	1,700
		180	8 $\times$ 10		63	27	2,000
		330	10 $\times$ 10		115	20	2,800

Part Numbering System

HBO Series	270 μF	$\pm 20\%$	25V	Carrier Tape		8 $\phi \times 10L$	Pb-free and PET coating case
HBO	271	M	1E	TR	-	0810	
Series Name	Capacitance	Capacitance Tolerance	Rated Voltage	Package Type	Terminal Type	Case size	Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (SMD Type)" on page 15.