

# TRACTION MINDER™ ELEVATOR SYSTEM

## PACKAGED SOLUTION TO ADDRESS ASME 17.1 REQUIREMENTS FOR TRACTION (ELECTRIC) ELEVATORS

Traction Minder creates newfound ease when ensuring the right components are specified to meet application and code requirements for traction elevators. A robust portfolio of packaged solutions also accounts for the growing demand to implement BACnet into BAS/BMS systems—conveniently offered with other system components in a single part number. Selections can now be completed with an increased level of confidence that field-proven components, from a single, trusted source, will create the right balance between functionality and cost in a life/safety application.

A list of Traction Minder part numbers, included on the back page, provide the pump, control panel and floats to meet 50, 100 and 150 GPM (as specified by ASME 17.1) at the specified distance (feet). This package approach—which was inspired by the industry's acceptance of Oil Minder® in hydraulic elevators—maximizes operational efficiencies from specification to installation. Designing a plug-and-play, application-specific answer to pumps and associated equipment in traction elevators has led to the following features:

- SE/SV series pumps, featuring a vortex impeller design, have become the standard for elevators
- NEMA 4X control panel with HOA switch, pump run light and a dry contact (high water) for connectivity
- Three floats (on, off and high water) are pre-assembled at the factory to minimize labor
- Ability to further customize with control panel features, main disconnect and/or junction box with 8-pin connector



# TECHNICAL DATA


| TRACTION MINDER™ SYSTEM COMPONENTS |              |                          |               | TECHNICAL DATA |         |       |                      |       |                    |                     |                      |                      |               |                 |                |
|------------------------------------|--------------|--------------------------|---------------|----------------|---------|-------|----------------------|-------|--------------------|---------------------|----------------------|----------------------|---------------|-----------------|----------------|
| Traction Minder PN                 | Pump         | Control                  | Floats (3)    | HP             | Voltage | Phase | Rated Full-load Amps | RPM   | Discharge (inches) | Head (ft.) @ 50 GPM | Head (ft.) @ 100 GPM | Head (ft.) @ 150 GPM | Weight (lbs.) | Height (inches) | Width (inches) |
| WSE40/115/1                        | SE-40/115/1  | CB-1000/120/1/15/2       | 741-009-1-XXX | 0.4            | 115     | 1     | 5.2                  | 3,450 | 2"                 | 11'                 |                      |                      | 24            | 15.59"          | 9.09"          |
| WSE50/115/1                        | SE-50/115/1  | CB-1000/120/1/15/2       | 741-009-1-XXX | 0.5            | 115     | 1     | 8.0                  | 3,450 | 2"                 | 22'                 |                      |                      | 29            | 16.57"          | 9.09"          |
| WSE50/208/3                        | SE-50/208/3  | CB-2000/208/3/2.5-4/5    | 741-009-1-XXX | 0.5            | 208     | 3     | 3.1                  | 3,450 | 2"                 | 22'                 |                      |                      | 29            | 16.57"          | 9.09"          |
| WSE50/230/3                        | SE-50/230/3  | CB-2000/230/3/2.5-4/7.5  | 741-009-1-XXX | 0.5            | 230     | 3     | 2.8                  | 3,450 | 2"                 | 22'                 |                      |                      | 29            | 16.57"          | 9.09"          |
| WSE50/460/3                        | SE-50/460/3  | CB-2000/480/3/1.6-2.5/15 | 741-009-1-XXX | 0.5            | 460     | 3     | 1.4                  | 3,450 | 2"                 | 22'                 |                      |                      | 29            | 16.57"          | 9.09"          |
| WSE100/115/1                       | SE-100/115/1 | CB-1000/120/1/15/2       | 741-009-1-XXX | 1.0            | 115     | 1     | 12.0                 | 3,450 | 2"                 | 35'                 | 9'                   |                      | 40            | 19.53"          | 9.09"          |
| WSE100/208/3                       | SE-100/208/3 | CB-2000/208/3/4-6.3/5    | 741-009-1-XXX | 1.0            | 208     | 3     | 4.4                  | 3,450 | 2"                 | 36'                 | 14'                  |                      | 40            | 19.53"          | 9.09"          |
| WSE100/230/3                       | SE-100/230/3 | CB-2000/230/3/4-6.3/7.5  | 741-009-1-XXX | 1.0            | 230     | 3     | 4.0                  | 3,450 | 2"                 | 36'                 | 14'                  |                      | 40            | 19.53"          | 9.09"          |
| WSE100/460/3                       | SE-100/460/3 | CB-2000/480/3/1.6-2.5/15 | 741-009-1-XXX | 1.0            | 460     | 3     | 2.0                  | 3,450 | 2"                 | 36'                 | 14'                  |                      | 40            | 19.53"          | 9.09"          |
| WSV200/208/1                       | SV-200/208/1 | CB-1000/208/1/15/2       | 741-009-1-XXX | 2.0            | 208     | 1     | 12.2                 | 3,450 | 2"/3"              | 52'                 | 35'                  | 14'                  | 77            | 20.94"          | 15.35"         |
| WSV200/230/1                       | SV-200/230/1 | CB-1000/230/1/15/3       | 741-009-1-XXX | 2.0            | 230     | 1     | 11.0                 | 3,450 | 2"/3"              | 52'                 | 35'                  | 14'                  | 77            | 20.94"          | 15.35"         |
| WSV200/208/3                       | SV-200/208/3 | CB-2000/208/3/6.3-10/5   | 741-009-1-XXX | 2.0            | 208     | 3     | 6.9                  | 3,450 | 2"/3"              | 52'                 | 35'                  | 14'                  | 77            | 20.94"          | 15.35"         |
| WSV200/230/3                       | SV-200/230/3 | CB-2000/230/3/4-6.3/7.5  | 741-009-1-XXX | 2.0            | 230     | 3     | 6.2                  | 3,450 | 2"/3"              | 52'                 | 35'                  | 14'                  | 77            | 20.94"          | 15.35"         |
| WSV200/460/3                       | SV-200/460/3 | CB-2000/480/3/2.5-4/15   | 741-009-1-XXX | 2.0            | 460     | 3     | 3.1                  | 3,450 | 2"/3"              | 52'                 | 35'                  | 14'                  | 77            | 20.94"          | 15.35"         |
| WSV300/208/3                       | SV-300/208/3 | CB-2000/208/3/6.3-10/5   | 741-009-1-XXX | 3.0            | 208     | 3     | 8.8                  | 3,450 | 2"/3"              | 64'                 | 47'                  | 26'                  | 79            | 21.73"          | 15.35"         |
| WSV300/230/3                       | SV-300/230/3 | CB-2000/230/3/6.3-10/7.5 | 741-009-1-XXX | 3.0            | 230     | 3     | 8.0                  | 3,450 | 2"/3"              | 64'                 | 47'                  | 26'                  | 79            | 21.73"          | 15.35"         |
| WSV300/460/3                       | SV-300/460/3 | CB-2000/480/3/4-6.3/15   | 741-009-1-XXX | 3.0            | 460     | 3     | 4.0                  | 3,450 | 2"/3"              | 64'                 | 47'                  | 26'                  | 79            | 21.73"          | 15.35"         |
| WSV500/208/3                       | SV-500/208/3 | CB-2000/480/3/14-20/15   | 741-009-1-XXX | 5.0            | 208     | 3     | 16.6                 | 3,450 | 3"/4"              | 74'                 | 61'                  | 48'                  | 123           | 24.92"          | 18.50"         |
| WSV500/230/3                       | SV-500/230/3 | CB-2000/230/3/11-16/7.5  | 741-009-1-XXX | 5.0            | 230     | 3     | 15.0                 | 3,450 | 3"/4"              | 74'                 | 61'                  | 48'                  | 123           | 24.92"          | 18.50"         |
| WSV500/460/3                       | SV-500/460/3 | CB-2000/480/3/9-13/15    | 741-009-1-XXX | 5.0            | 460     | 3     | 7.5                  | 3,450 | 3"/4"              | 74'                 | 61'                  | 48'                  | 123           | 24.92"          | 18.50"         |

A "BAC" suffix is added to the end of the PN to indicate BACnet capability.


## BACnet INTEGRATION

BACnet functionality is available on all Traction Minder models to combine plumbing and HVAC equipment into the same channel for alarms, fault codes and operating schedules. The integrated hardware/software implementation allows the control panel to communicate with any protocol, with IP and MS/TP being the most popular. The following messaging is offered with the standard BACnet package:

- Oil fault
- High water alarm
- Pump run status

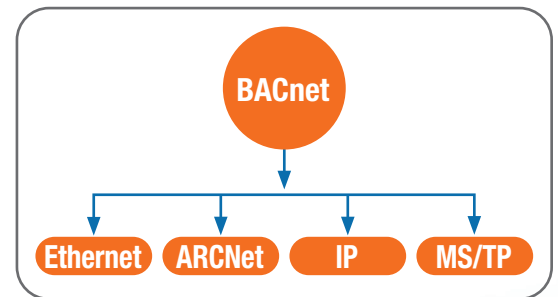

## Typical Traction Minder™ System

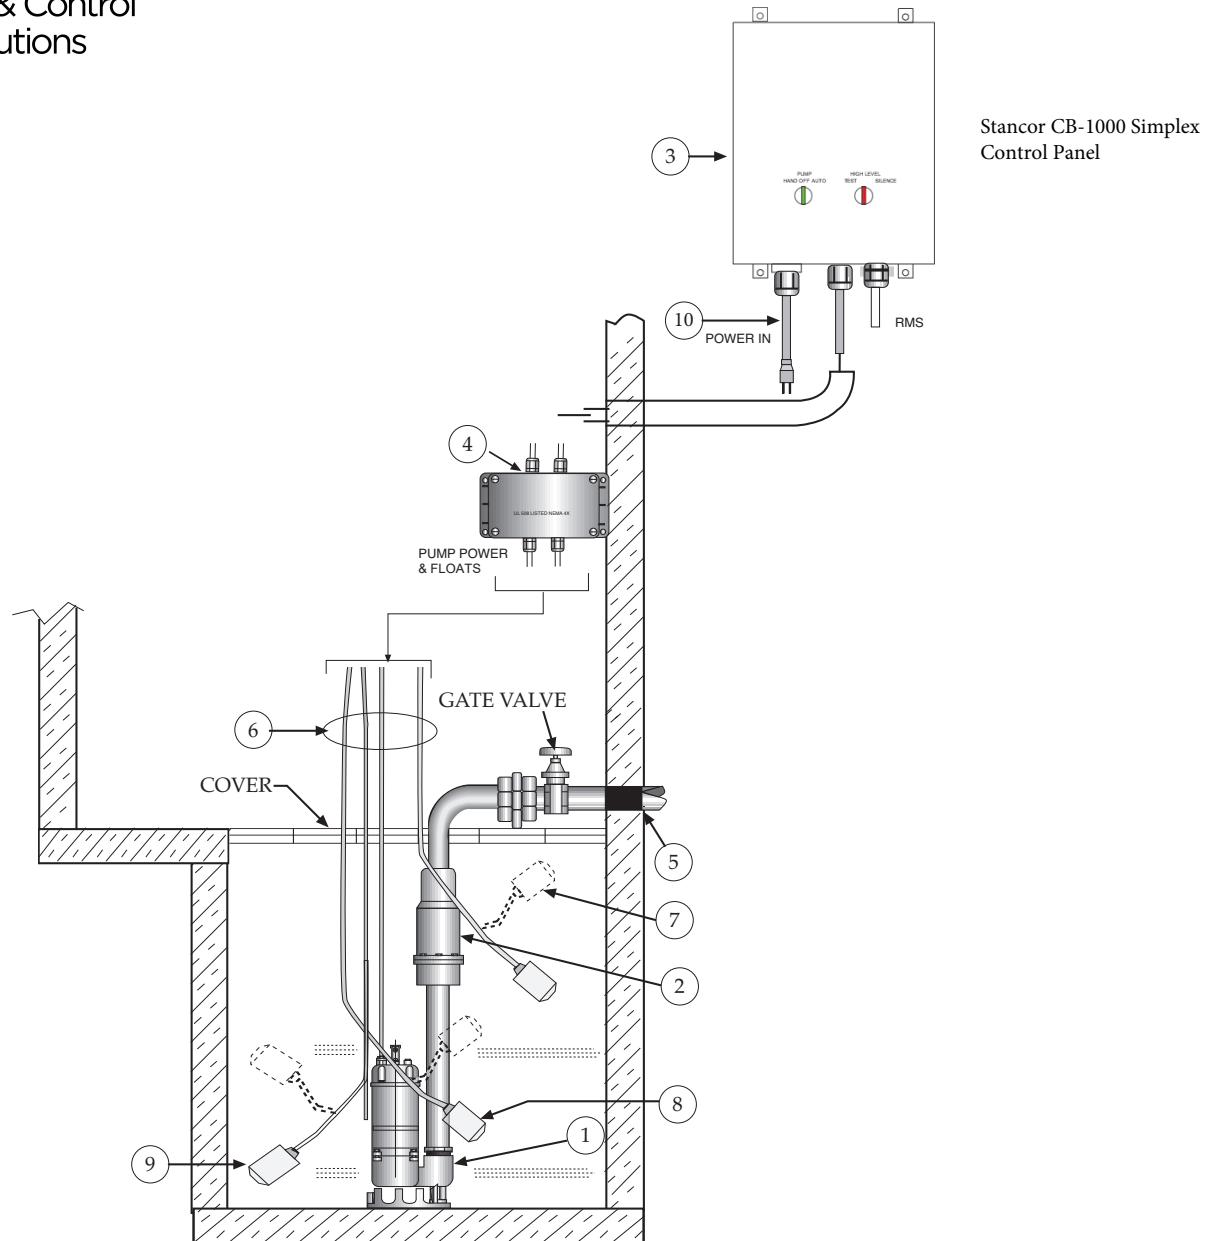

1. Stancor® Model SE-50 submersible effluent pump .5 HP, 115 volt, 3600 RPM, 2" discharge connection
2. Check valve (2") By others.
3. Stancor® Traction Minder™ system, 115V, 1Ø control system with built-in audible and visual alarm when pump does not run due to high liquid or high amperage condition. Provide silencing button for audible alarm built into panel. Panel shall have one contact for a remote alarm location (high water or amperage alert).
4. Junction box (Optional)
5. All buried pump pressure discharge piping shall be protected with tapecoat CT corrosion protection tape
6. Pump cable and pump "on / off and high liquid alarm" float cables (16 ft. lengths)
7. 'High liquid alarm' float with clamp device to mount to pump discharge piping
8. Pump 'ON' float
9. Pump 'OFF' Float
10. Power cord and molded ground plug (6 ft. length)

ITEMS 1, 2, 3, 4, 6, 7, 8, 9, and 10 PROVIDED BY STANCOR® AS A STANDARD PACKAGE

|                                                                                             |                       |                       |               |
|---------------------------------------------------------------------------------------------|-----------------------|-----------------------|---------------|
| <br>STANCOR | <b>TECHNICAL DATA</b> | <b>AVENGER SERIES</b> | <b>SV-300</b> |
| Dwg:                                                                                        | DS-A04-017            | Rev: 2                | Date: 01/16   |

## MOTOR SPECIFICATIONS

|                       |                            |
|-----------------------|----------------------------|
| Motor Design          | Induction                  |
| Motor Type            | Enclosed submersible       |
| Insulation Class      | Class E                    |
| Motor Protection      | Bi-metallic Thermal Switch |
| Bi-Metallic Temp Trip | 120° C ± 5° C              |
| Service Factor        | 1.3                        |
| Voltage Tolerance     | ± 10% from nominal         |



## MOTOR DATA, 60Hz

| Model  | Phase | Output Power BHP | Volts | Full Load Amps | Locked Rotor Amps | NEMA Code Letter | Power Factor 100% Load | Motor Efficiency 100% Load | Pole/Speed (rpm) |
|--------|-------|------------------|-------|----------------|-------------------|------------------|------------------------|----------------------------|------------------|
| SV-300 | 3     | 3.0              | 230   | 8              | 45                | G                | 0.92                   | 0.82                       | 2/3450           |
|        | 3     | 3.0              | 460   | 4.3            | 21.5              | G                | 0.91                   | 0.81                       | 2/3450           |
|        | 3     | 3.0              | 575   | 3.5            | 17.5              | G                | 0.93                   | 0.79                       | 2/3450           |

## MATERIALS OF CONSTRUCTION

|                   |                            |
|-------------------|----------------------------|
| Upper Motor Lid   | FC-20 Cast Iron            |
| Motor Housing     | AISI 304 Stainless Steel   |
| Oil Chamber       | FC-20 Cast Iron            |
| Volute            | FC-20 Cast Iron            |
| External Hardware | AISI 304 Stainless Steel   |
| O-Rings           | Nitrile (Buna N)           |
| Motor Shaft       | Stainless Steel (410)      |
| Upper Bearing     | Single row, doubled sealed |
| Lower Bearing(s)  | Single row, doubled sealed |
| Upper Shaft Seal  | CA/CE (carbon/ceramic)     |
| Lower Shaft Seal  | CA/CE; outboard lip seal   |
| Impeller          | FC-20 Cast Iron            |

## DIMENSIONS, WEIGHT, AND MISC.

|                               |                                      |
|-------------------------------|--------------------------------------|
| Pump weight                   | 79lbs (35kg)                         |
| Maximum submergence           | 30feet (9m)                          |
| Discharge size, standard      | 2 inch or 3 inch NPT female vertical |
| Maximum temp. of pumped fluid | 104°F (40°C)                         |

## CABLE SPECIFICATIONS

| MODEL  | PHASE/VOLTAGE | POWER CABLE | LENGTH        | OUTER JACKET |
|--------|---------------|-------------|---------------|--------------|
| SV-300 | 3Ø-230V       | STOW 14/4   | 33 feet (10m) | NBR          |
|        | 3Ø-460V       | STOW 14/4   | 33 feet (10m) | NBR          |
|        | 3Ø-575V       | STOW 14/4   | 33 feet (10m) | NBR          |

Power cable suitable for all standard voltages listed in "MOTOR DATA" section.



Arturo Garcia  
102 NE 2nd Street, Suite 510  
Boca Raton FL 33432  
(954) 483 9269  
arturo@wvs-llc.com

Specifications subject to change without notice




Stancor Model SV-300  
Individual Performance Curve

Horsepower: 3 HP

Hertz: 60 Hz

EFF ( % ) BHP

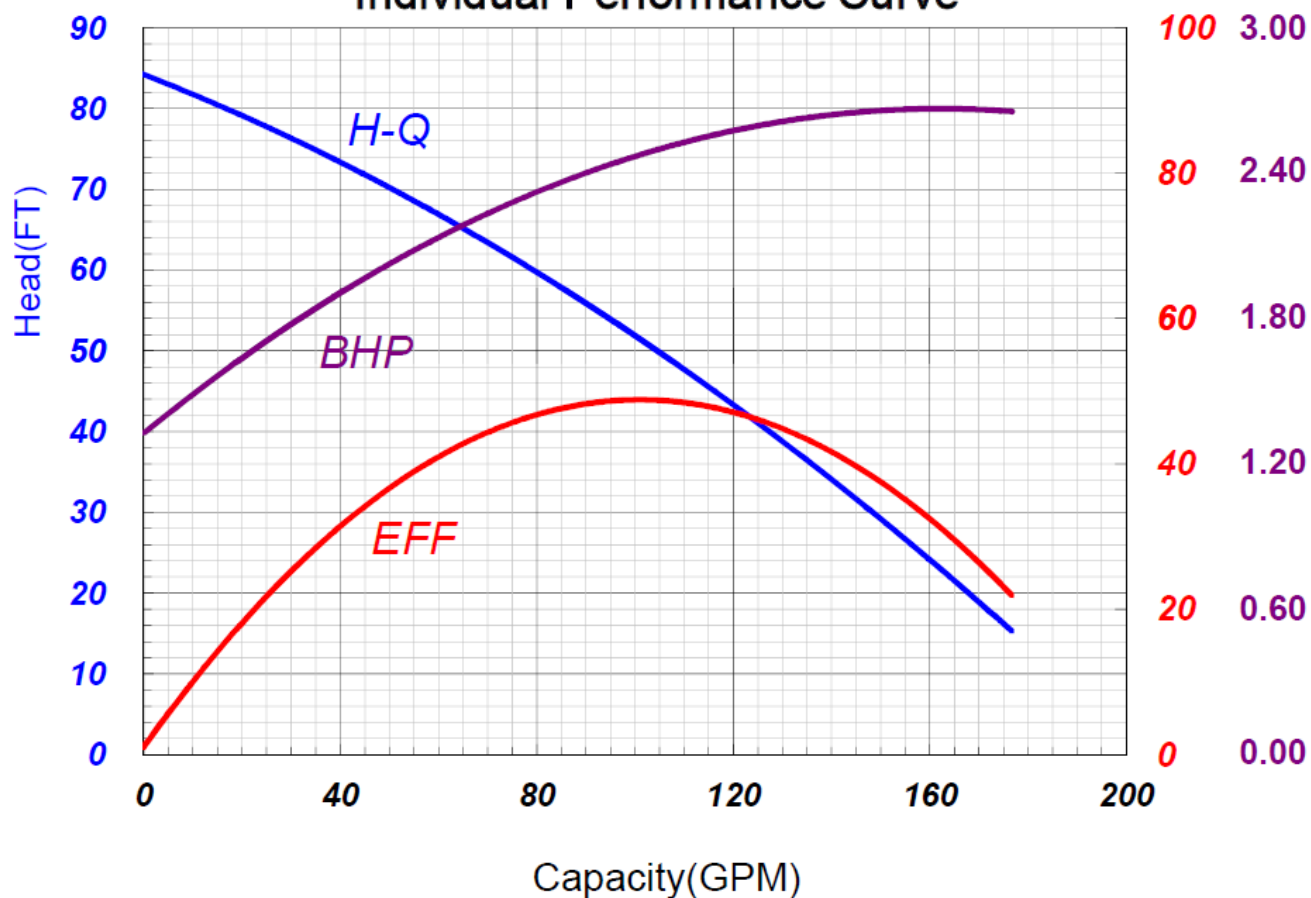

WASTEWATER  
SOLUTIONS LLC

Arturo Garcia  
102 NE 2nd Street, Suite 510  
Boca Raton FL 33432  
(954) 483 9269  
arturo@wws-llc.com

Specifications subject to change without notice



# DIMENSIONS

# AVENGER SERIES

# SV-300


Dwg:

DS-A04-020

Rev: 1

Date: 05/15

## SV-300

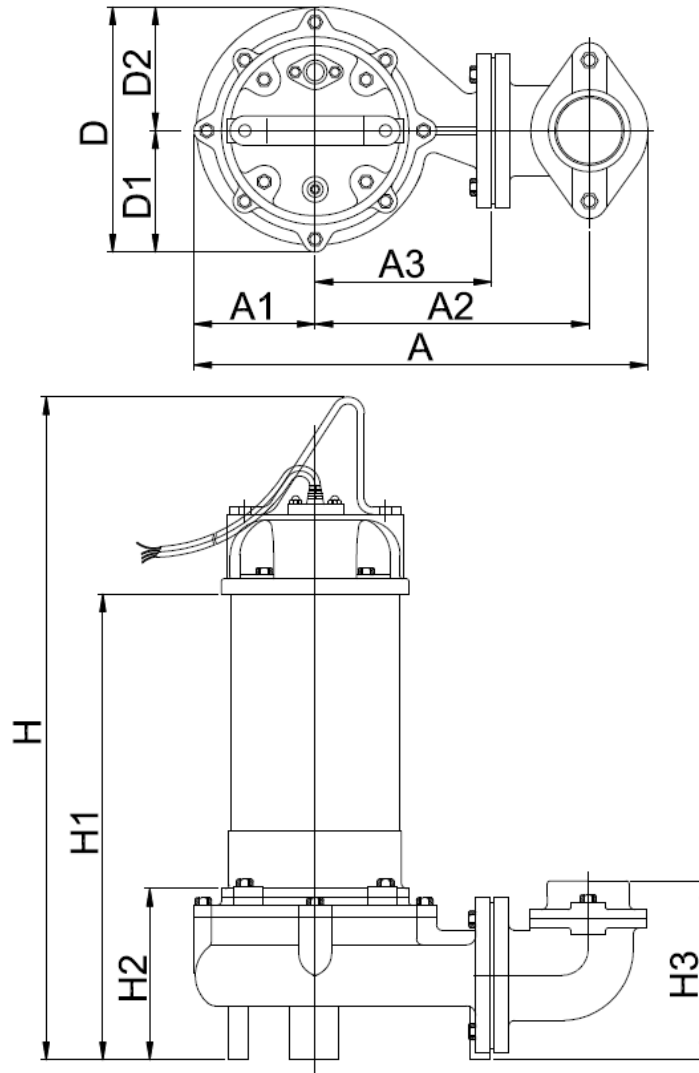

| TYPE       | DISCHARGE           | A      | A1    | A2    | A3    | D     | D1    | D2    | H      | H1     | H2    | H3    |
|------------|---------------------|--------|-------|-------|-------|-------|-------|-------|--------|--------|-------|-------|
| DIMENSIONS | 2" or 3" NPT female | 15.35" | 4.06" | 9.25" | 5.94" | 8.27" | 4.13" | 4.13" | 21.73" | 16.54" | 5.91" | 5.98" |



**WASTEWATER  
SOLUTIONS LLC**

Arturo Garcia  
102 NE 2nd Street, Suite 510  
Boca Raton FL 33432  
(954) 483 9269  
arturo@wws-llc.com

Specifications subject to change without notice

Stancor, Inc. 515 Fan Hill Road, Monroe, CT 06468

Tel: 203-268-7513

Fax : 203-268-7958

www.stancorpumps.com


# 3-PHASE SIMPLEX CONTROL PANEL

INCORPORATING AUTOMATION TO IMPROVE  
RELIABILITY AND SYSTEM EFFICIENCIES

The CB2000 is a standard 3-phase Simplex pump control that provides the base for additional customization. Simplex controls provide dependable, automatic operation of a single pump. Optional features can be added to the standard package to create a unique solution for individual needs.

Newfound efficiencies, impacting both energy consumption and costs, can result from implementing controls to achieve benefits associated with automation.

Stancor helps you capture savings by providing the best of both worlds—large enough to leverage global experience and small enough to offer local service and support.

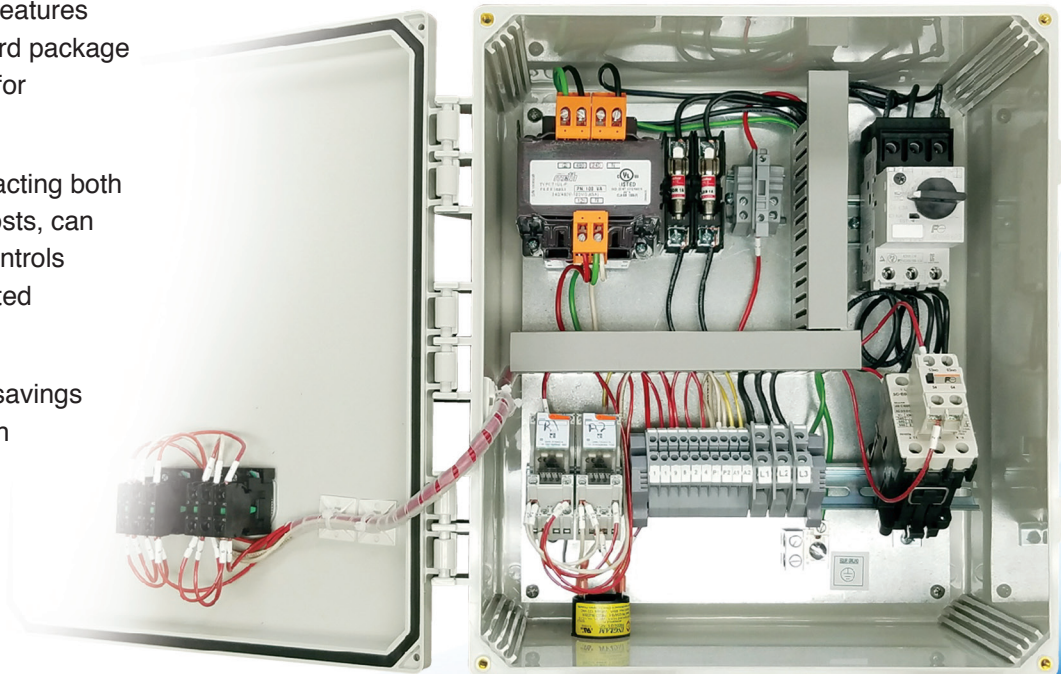

**STANCOR™**


*Pump & Control Solutions*

BUILDING TRADES | CONSTRUCTION | MINING | UTILITIES | WASTEWATER

# APPLICATIONS


Simplex controls panels are used in a variety of applications, including construction, irrigation systems, lift stations, mining and utilities. The core design, and accompanying features, are intended to be robust enough for general purpose. Customization from this base design can then occur for specialty applications.

## FRONT COVER

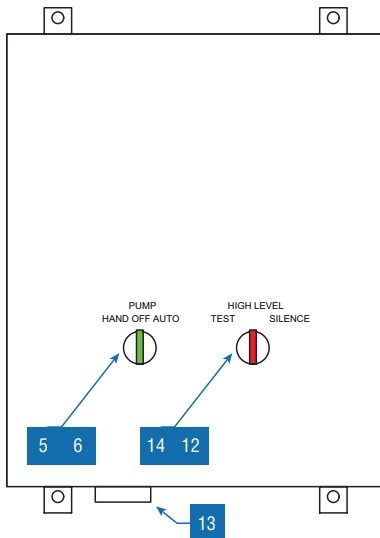

Dimensions: 14 wide / 12 tall / 7 deep

## INTERIOR COMPONENTS

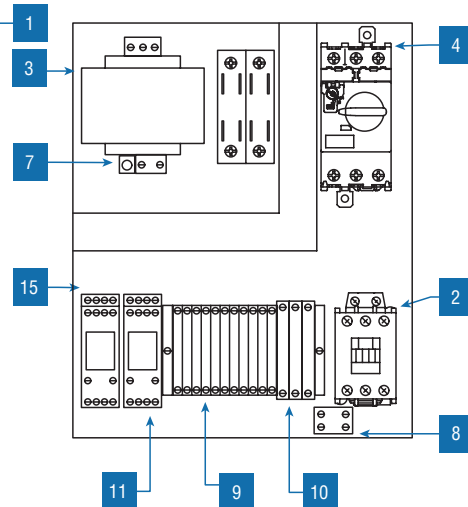

# FEATURES

## STANDARD COMPONENTS

- 1 14 x 12 x 7 NEMA 4X polycarbonate enclosure
- 2 IEC motor contactor
- 3 Multi-tap transformer
- 4 Motor protective switch (overload)
- 5 HOA (Hand/Off/Auto) switches
- 6 Green pump run indicator lights
- 7 Alarm/Control fuse
- 8 Ground lugs
- 9 Float switch terminal block angled for ease of field installation
- 10 Input power terminal block angled for ease of field installation
- 11 Alarm relay for dry contacts

## STANDARD ALARM PACKAGE

- 12 Indicator light for visual check
- 13 Sonalert audible alarm
- 14 Exterior alarm test with silence
- 15 Horn silence relay

G&G Controls, a division of Stancor acquired in 2016, incorporates more than three decades of experience designing and building customized controls into every panel. Having a resource with such an extensive knowledge base provides the basis for consultation into design modifications. Projects benefit from an extensive knowledge of code and certification for both UL 508A and UL 698A. A large installed base of standard and customized control panels allows Stancor to find the right options—every time.

## ADDITIONAL OPTIONS


- High water alarm with red LED light, buzzer and test-silence switch
- Mechanical float switches with 20-, 40- or 60-foot cords
- Dry contacts for remote alarm signal
- A variety of enclosure materials, including stainless steel, depending on the application
- High alarm dry contacts



**STANCOR™**  
*Pump & Control Solutions*

[WWW.STANCORPUMPS.COM](http://WWW.STANCORPUMPS.COM) | 203.268.7513

© copyright 2017 Stancor, L.P.

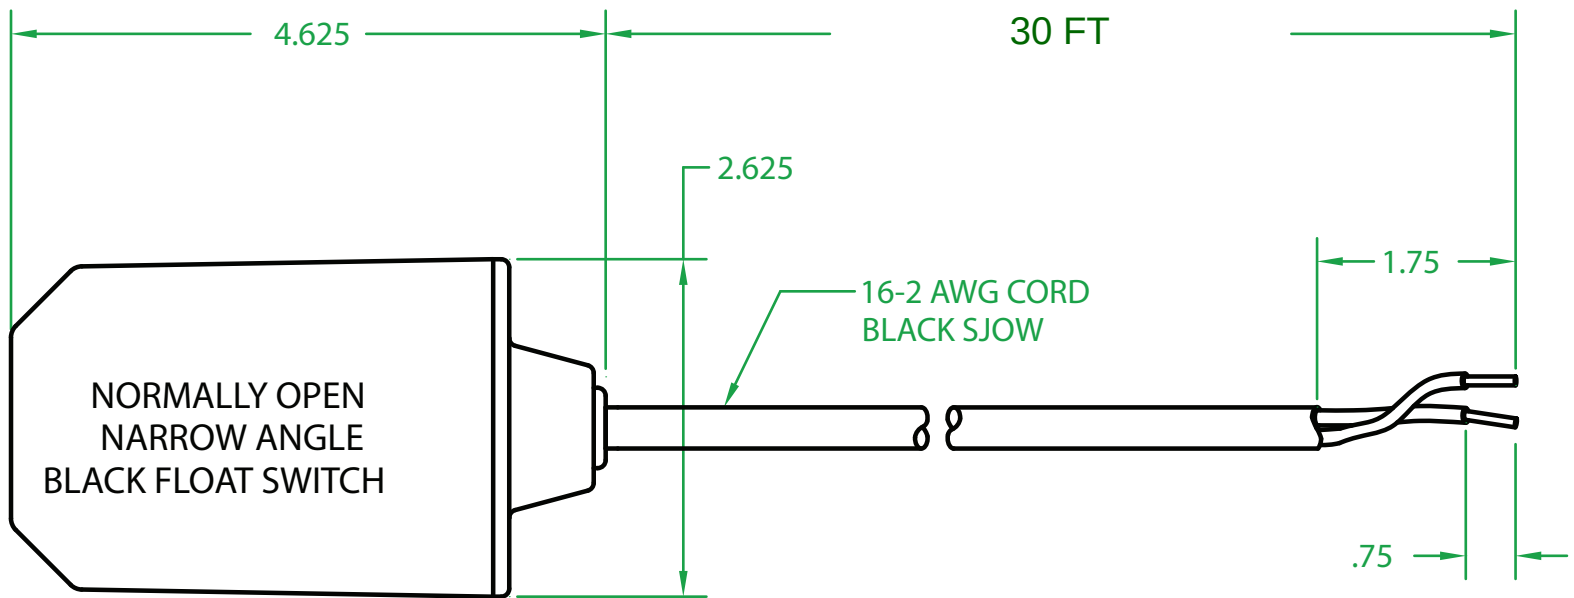

OPERATING ANGLE: TETHERLESS/INTERNALLY WEIGHTED  
 CONTACTS CLOSE @ 25° ABOVE HORIZONTAL.  
 CONTACTS OPEN @ 10° BELOW HORIZONTAL.

SWITCHING DIFFERENTIAL: 3.50"

ELECTRICAL RATINGS: 1/4 H.P. 10 AMPS @ 120/240 VAC. 34.8 LRA

FLOAT MATERIAL: A.B.S.