




WMS 11.4 Tutorial

## **NSS Interface**

Use the National Stream Statistics interface to estimate peak flows at different recurrence intervals

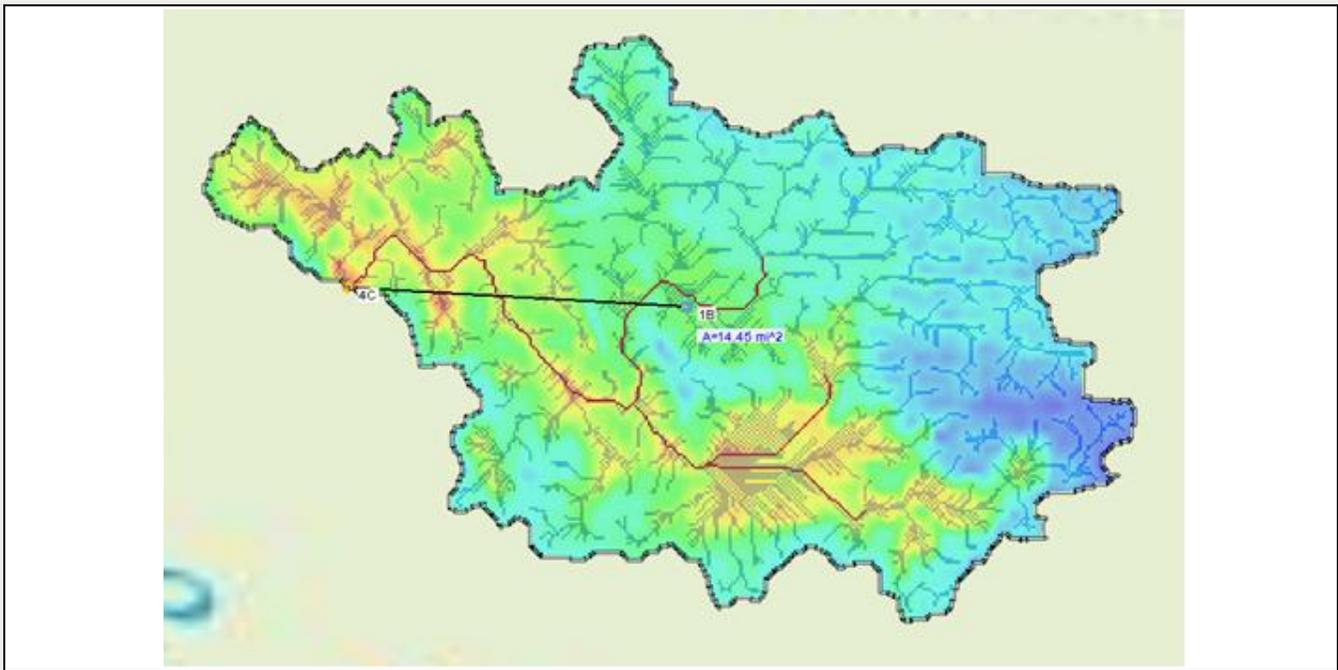

### Objectives

Learn to delineate a basin for an area of interest, run NSS to estimate peak flows at different recurrence intervals, and use an NSS region coverage to automatically compute regions for an NSS model.

#### Prerequisite Tutorials

- DEM Delineation

#### Required Components

- WMS Core

#### Time

- 10–20 minutes

<b>1</b>	<b>Introduction.....</b>	<b>2</b>
<b>2</b>	<b>Getting Started.....</b>	<b>2</b>
<b>3</b>	<b>Utilizing an NSS Region Coverage.....</b>	<b>2</b>
3.1	Assigning Regions to Feature Polygons .....	3
3.2	Opening the Watershed .....	4
3.3	Running NSS .....	6
<b>4</b>	<b>Conclusion .....</b>	<b>7</b>

## 1 Introduction

---

The National Streamflow Statistics (NSS) program, developed by the USGS, provides a quick and easy way of estimating peak flows for ungaged watersheds. This data can be used in the design of culverts, flood-control structures, and flood-plain management. It utilizes regression equations that have been developed for each state. Most regression equations are functions of parameters such as area, slope, and runoff distance that are automatically computed by WMS when delineating a watershed.

This program was introduced in a previous tutorial when discussing overlay and time of travel computations. This tutorial demonstrates data collection and starting a project from scratch. NSS will then be run for the selected area to compute the peak flows for the different return periods. If the equation ends up needing variables not derived from the DEM alone, then a general overlay may need to be implemented in order to compute percentages of land use, soil, or rainfall for different regions.

## 2 Getting Started

---

Starting WMS new at the beginning of each tutorial is recommended. This resets the data, display options, and other WMS settings to their defaults. To do this:

1. If necessary, launch WMS.
2. If WMS is already running, press *Ctrl-N* or select *File | New...* to ensure that the program settings are restored to their default state.
3. A dialog may appear asking to save changes. Click **No** to clear all data.

The graphics window of WMS should refresh to show an empty space.

## 3 Utilizing an NSS Region Coverage

---

This tutorial demonstrates creating an NSS region coverage to use to map equations for Florida. However, these steps are applicable for any location in the United States.

The NSS Region coverage type allows WMS to automatically determine which regression equations to use for an NSS simulation. If a drainage basin overlaps multiple NSS regions, the NSS Region coverage automates the calculations for the percentage of the watershed in each region.

An NSS Region coverage will be used to automatically assign the region for an NSS simulation. This coverage was previously digitized from an image displaying the NSS regions of Florida, and the image was previously registered.

A similar map could be made by scanning or importing a map of the regions to create an image file, registering the image to a recognized projection system, digitizing the polygons, and assigning the state and region.

The USGS website for NSS<sup>1</sup> has images available in the state-by-state documentation of the equations. These images can be saved and then registered in WMS. For more information on digitizing, please see the "Basic Feature Objects" tutorial.

Import the image by doing the following:

1. Switch to the **Map**  module.
2. Select **File | Open...** to bring up the *Open* dialog.
3. Select "JPEG Image File (\*.jpg;\*.jpeg)" from the *Files of type* drop-down.
4. Browse to the *nss\nss\* folder and select "NSSMapFL.jpg".
5. Click **Open** to import the file and exit the *Open* dialog.

The Main Graphics Window should appear similar to Figure 1.



Figure 1 Imported map showing four regions in Florida

### 3.1 Assigning Regions to Feature Polygons

---

Florida has five regions, as shown in Figure 1. The area at the bottom of the map is not used in this tutorial. These regions have already been digitized and saved in a WMS MAP file. This file contains an NSS Region coverage with polygons representing each of these regions. The assignment of attributes will be completed during this tutorial.

---

<sup>1</sup> See <http://water.usgs.gov/osw/programs/nss/> for details.

1. Click **Open**  to bring up the *Open* dialog.
2. Select “Feature Object Files (\*.map)” from the *Files of type* drop-down.
3. Select “NSSMapFL.map” and click **Open** to import the MAP file and exit the *Open* dialog.

This MAP file was digitized directly from the map image previously imported.

4. Using the **Select Feature Polygon**  tool, double-click in the top left polygon (“1” in Figure 2) to bring up the *NSS Region Polygon Attributes* dialog.



Figure 2 Map broken into regions, numbered clockwise from top left

5. In the *Select NSS Region* section, select “Florida” from the *State* drop-down.
6. Choose “Rural Region 1 2011 5034” from the *NSS Region* drop-down.
7. Click **OK** to close the *NSS Regional Polygon Attributes* dialog.
8. Repeat steps 4-7 for the regions labelled “2”, “3”, and “4”, assigning them to “Rural Region 2 2011 5034”, “Rural Region 3 2011 5034”, “Rural Region 4 2011 5034” (respectively).

The southernmost polygon should be left undefined in this tutorial.

### 3.2 Opening the Watershed

Now open a project file containing the watershed study area:

1. Click **Open**  to bring up the *Open* dialog.
2. Select “WMS XMDF Project File (\*.wms)” from the *Files of type* drop-down.
3. In the *Open* dialog, locate and open “NSS\_FL.wms”.

The study area appears as a small polygon near the top of region “2” (Figure 3).

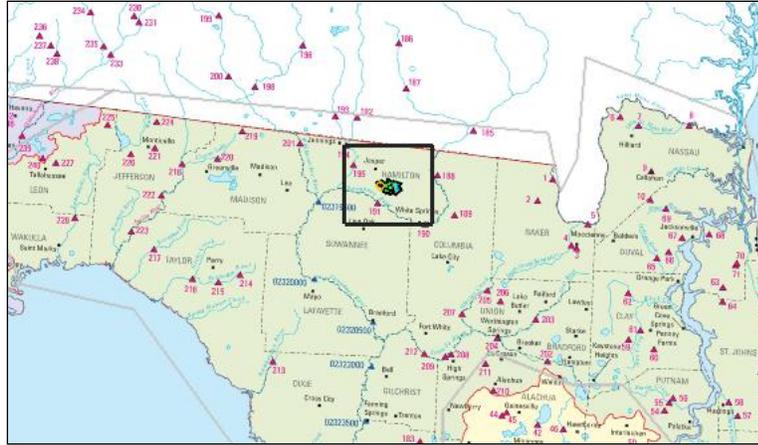


Figure 3 Study area (in rectangle)

To zoom in on the correct area quickly, do the following:

4. Right-click on “ Drainage” in the Project Explorer and select **Zoom to Layer**.

This zooms in on the study area (Figure 4).

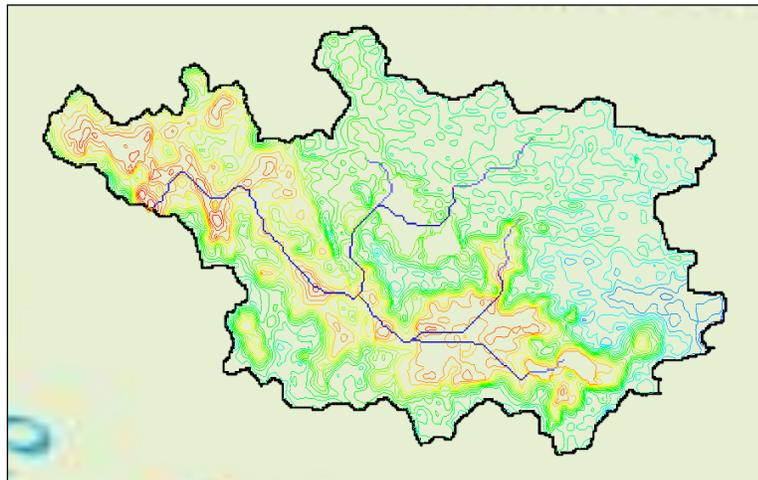


Figure 4 Study area

5. Right-click on “ DEM” in the Project Explorer and select **Display Options...** to open the *Display Options* dialog.
6. Select “DEM Data” from the list on the left.
7. On the *DEM* tab, turn off *DEM Contours* and click **OK** to close the *Display Options* dialog.

The study area should appear similar to Figure 5.

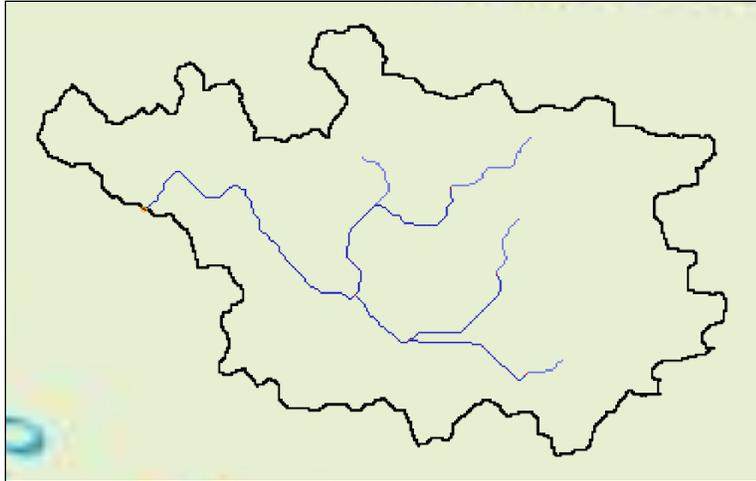


Figure 5 Study area with DEM contours turned off

8. Right-click on “ Drainage” and select **Compute Basin Data...** to bring up the *Units* dialog.
9. In the *Model units* section, click **Current Projection...** to bring up the *Display Projection* dialog.
10. In the *Horizontal* section, select *Global Projection* and click **Set Projection...** to bring up the *Horizontal Projection* dialog.
11. Click **OK** to close the *Horizontal Projection* dialog.
12. In the *Vertical* section, select “Meters” from the *Units* drop-down and click **OK** to close the *Display Projection* dialog.
13. Click **OK** to close the *Units* dialog.

The view of the study area should update to appear similar to Figure 6.

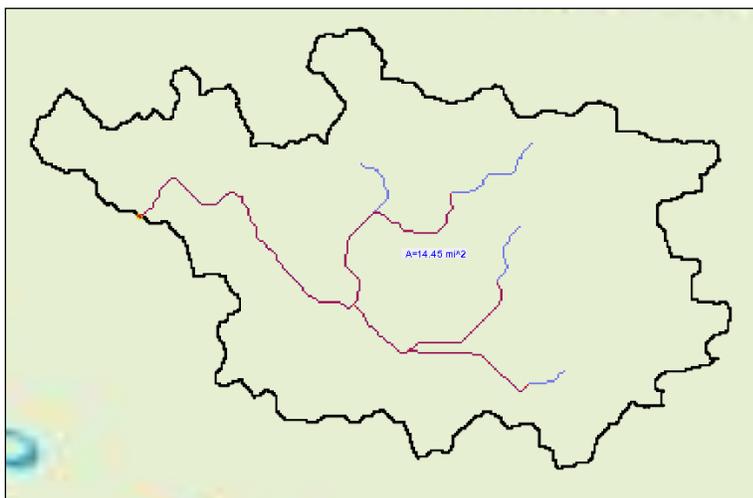


Figure 6 The study area after units and projection updated

### 3.3 Running NSS

1. Switch to the **Hydrologic Modeling**  module.

2. Select “NSS” from the Model drop-down (Figure 7).

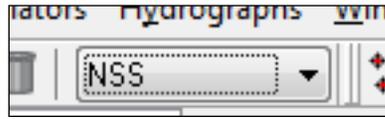


Figure 7 NSS selected

3. Using the **Select Basin** tool, double-click in basin 1B to bring up the *National Streamflow Statistics Method* dialog.
4. If prompted to use polygons, click **Yes**.

Notice that in the *Selected Equations* field of the *Regional regression equations* section, “Rural Region 2 2011 5034” is automatically selected. If the basin had overlapped with another NSS region, the areas and percentages of overlap for each region would also have been calculated.

5. In the *Variable values* section, on the *Percent Storage from NLCD1992* row, enter “10.8” in the *Value* column.

For more information on how the *Percent Storage from NLCD1992* variable was calculated, see the “Time of Concentration with NSS” tutorial.

6. In the *Results* section, click **Compute Results** to populate the spreadsheet below that.

In the *Results* table, the computed peak flow values will be displayed in the *Peak [cfs]* column for the different recurrence intervals in the *Recurrence [years]* column.

7. Click **Done** to close the *National Streamflow Statistics Method* dialog.

The “NSS Region” coverage allows WMS to automatically load the appropriate regression equation(s) when opening the NSS dialog. This can save a significant amount of time if planning to study many different basins on a regular basis,

## 4 Conclusion

This concludes the “NSS Interface” tutorial. The following key concepts were discussed and demonstrated:

- How to calculate important parameters with the Compute Basin Data command
- How to use an NSS Region coverage to automatically determine which equations should be used and to compute any areas of NSS region overlap