

# DL097 Series

## Medium Dome Light | Product Datasheet



### RGB Output Option

Developed specifically for use with Advanced illumination's multi-channel controllers

### M6 Mounting Points

Engineered with four M6 mounting points on the top surface for highly adjustable positioning



### Indirect Diffuse Multi-Angle and Multi-Direction Illumination

High Intensity LEDs create a medium small area hemispherical light geometry for curved, reflective surfaces

### High Power LEDs

Equipped with industrial grade LEDs capable of high output strobe and continuous operation, all while maintaining a long lifespan

## DL097 Series Description

Utilizing high power LEDs, the DL097 is engineered to provide class-leading intensity for medium size target area coverage.

As is typical for all hemispherical dome lights, the DL097 is best suited for inspection on curved surfaces where even illumination is necessary to avoid hot-spot reflections.

Similarly to the smaller DL194, the DL097 is available in wide range of visible and NIR wavelengths, including an RGB option that is designed to operate with Advanced illumination's multi-channel current source controllers.



High Intensity



12 Available Wavelengths



RGB Option Available



Multiple Control Options



1-2 Week BTO Lead Times Typical

**General Information**

**General Specifications**

Category	Specification	Detail						
<b>Optical</b>	Available Wavelengths	White, 455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, 660 nm, 730 nm, 850 nm, 940 nm, RGB						
	Available Lensing	No Lenses						
	Available Light Conditioning	None						
<b>Electrical</b>	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>						
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain						
<b>Mechanical</b>	Sizing Info	<table border="1"> <thead> <tr> <th>Standard</th> <th>Diameter</th> <th>Height</th> </tr> </thead> <tbody> <tr> <td></td> <td>8.44"(214.3mm)</td> <td>4.14"(105.2mm)</td> </tr> </tbody> </table>	Standard	Diameter	Height		8.44"(214.3mm)	4.14"(105.2mm)
	Standard	Diameter	Height					
		8.44"(214.3mm)	4.14"(105.2mm)					
Weight Info (Standard)	~ 3.02 lbs (~1369 g) per Unit							
Mounting Info	M6 Mounting Holes							
	Material Info	Die Cast Aluminum Housing, PVC Cable Jacket, Steel Black Oxide Fasteners						
<b>Thermal</b>	Operating Case Temperatures	25 °C to 60 °C						
	Operating Ambient Temperatures	0 °C to 35 °C						
<b>Certification</b>	Compliance	CE, RoHS, IEC 62471						
	IP Rating	Not Rated						
	Lumen Maintenance - White Only	L70 (50,000 Hours)						

[See Page 7 for More Details](#)

**General Information - Continued**

**Part Number Key**

Model	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL097	-	XXX	XX	-	XXX
DL097		455 (royal blue)	C1		M8 <sup>1</sup>
		470 (blue)	C5		M12 <sup>1</sup>
		505 (cyan)	IC		
		530 (green)	I3		
		590 (amber)	I3S		
		625 (red orange)	24		
		660 (red)			
		730 (IR)			
		850 (IR)			
		940 (IR)			
		WHI (white)			
		RGB (all colors) <sup>2</sup>			
more info on page		5	8		10

**Example Part Numbers:**

DL097-470C5  
DL097-625I3-M12

<sup>1</sup>Available with 24, IC, I3, and I3S options only

<sup>2</sup>Available with C1 and 24 options only


**In Stock**

DL097-WHIIC

**Lead Times**

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Configurator**

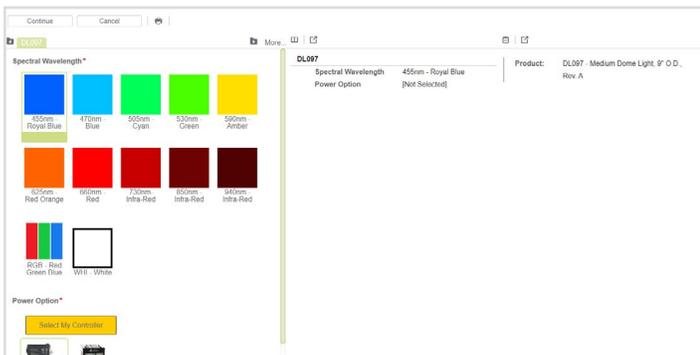


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL097 Medium Dome Light to your specific needs. For a guided configuration, [visit our online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 25 mm Working Distance**

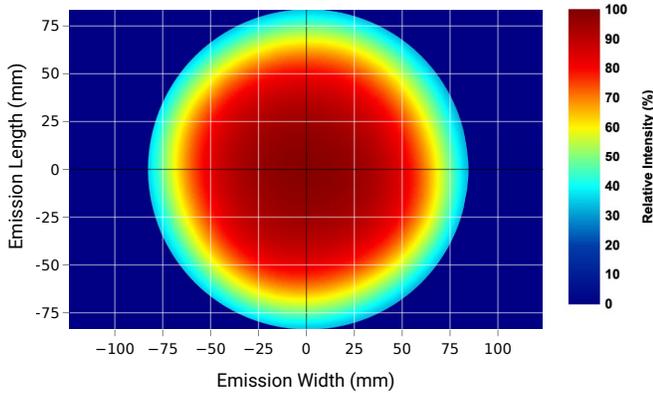


Intensity distribution sample image was taken with a white DL097 unit.

**Illuminance vs Working Distance**

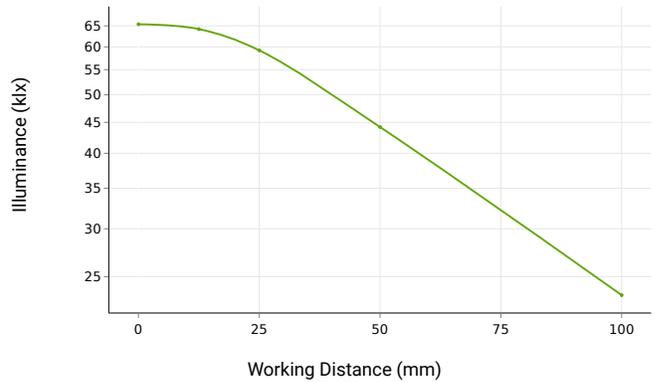


Illuminance data was collected using a white DL097 unit.

**FWHM vs Working Distance**

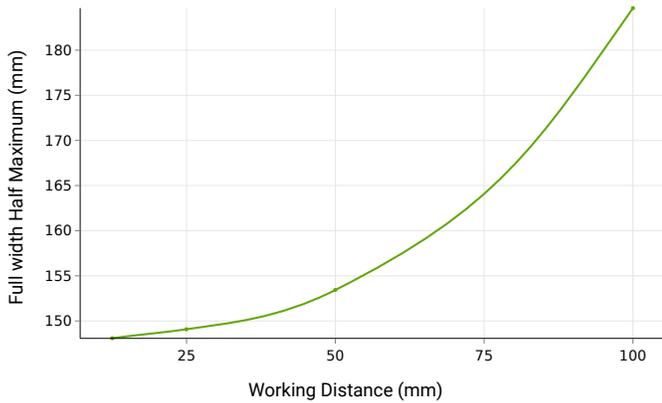

Full Width Half Maximum (FWHM) data collected using a white DL097 unit.

**Continuous vs Strobe Intensity**

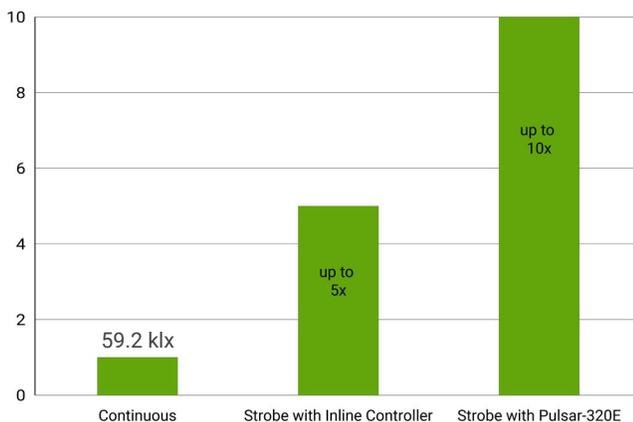


Under continuous operation, a white DL097 unit will output an **illuminance of 59.2 klx** and an **irradiance of 189.3 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL0907 Series has been engineered to be overdrive strobe capable. When configured with AI's strobe enabled Inline Controller (I3, and I3s), the DL097 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with AI's Pulsar 320E, a **DL097 can be strobed up-to 10X continuous intensity levels.**

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**White Spectral Profile**

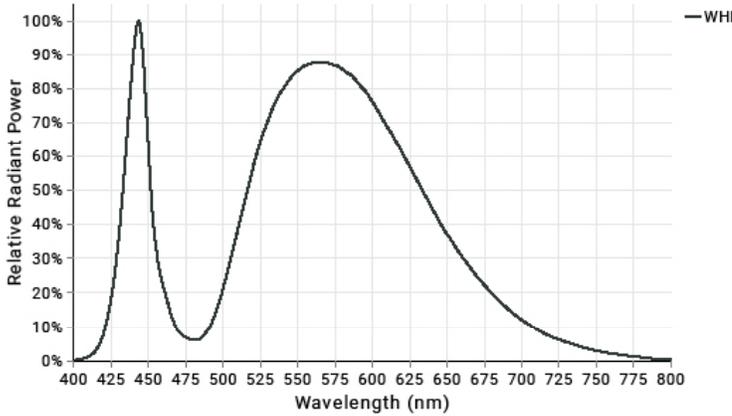


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL097 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

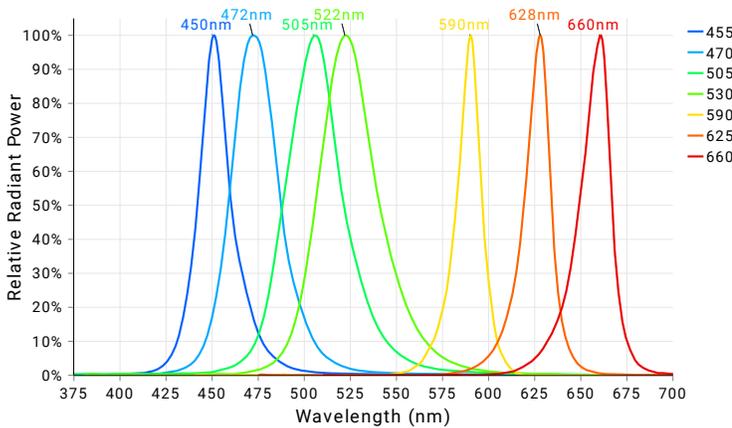


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL097 Series is available in **455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, and 660 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

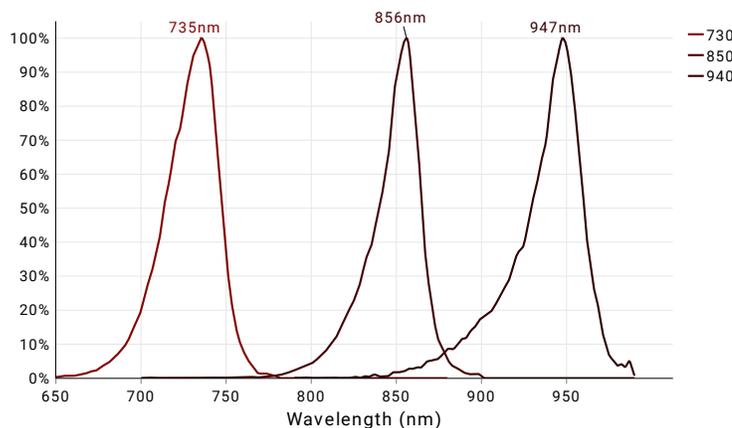

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL097 Series is available in **730 nm, 850 nm, and 940 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	850, 940
Group 1	No Photobiological hazard under normal behavioral limitations	455, 470, 530, 590, 625, RGB, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	N/A

Advanced Illumination’s lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light’s optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: “If it’s not dirty, don’t clean it.” Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

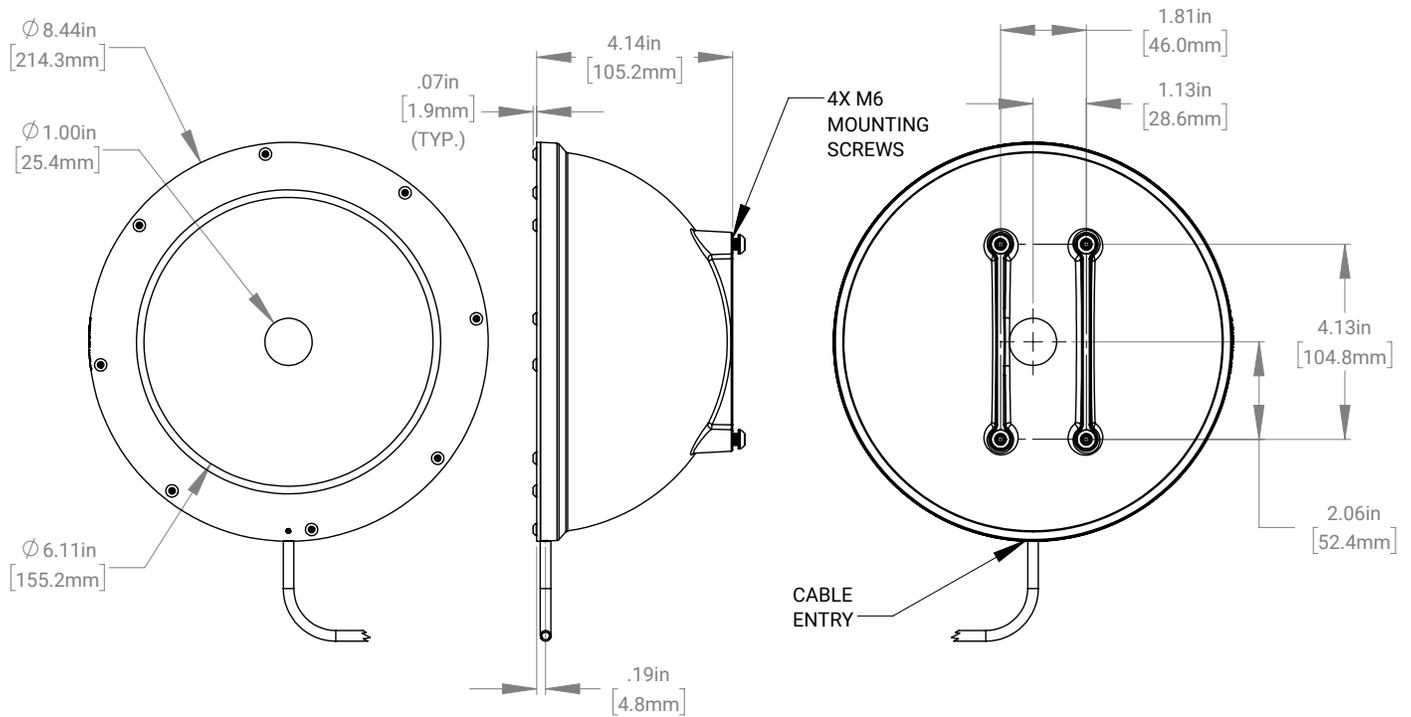

For full installation drawings and complete CAD models of this configuration, please visit the [downloads section of the product webpage](#).

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**

Wavelengths (nm)	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S)
WHI, 455	0.720A	1.080A
470, 505, 530, 590, 625, 660, 730, 850, 940	0.720A	1.010A


Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**


**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous  <b>Output Current:</b> 1.25 A Max Continuous  <b>I/O:</b> 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed  <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent)  <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation  <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**


**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
		<p><b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

## Additional Information

### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliancy documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# DL067 Series

## Wide Linear Diffuse Lights

### Product Datasheet




#### High Power LEDs

Built with industrial grade LEDs capable of high output continuous operation, all while maintaining a long lifespan

#### Scalable Extrusion-Based Housing

Built with extrusion-based aluminum construction allowing for linear, one-dimensional scalability, while maintaining structural rigidity and durability

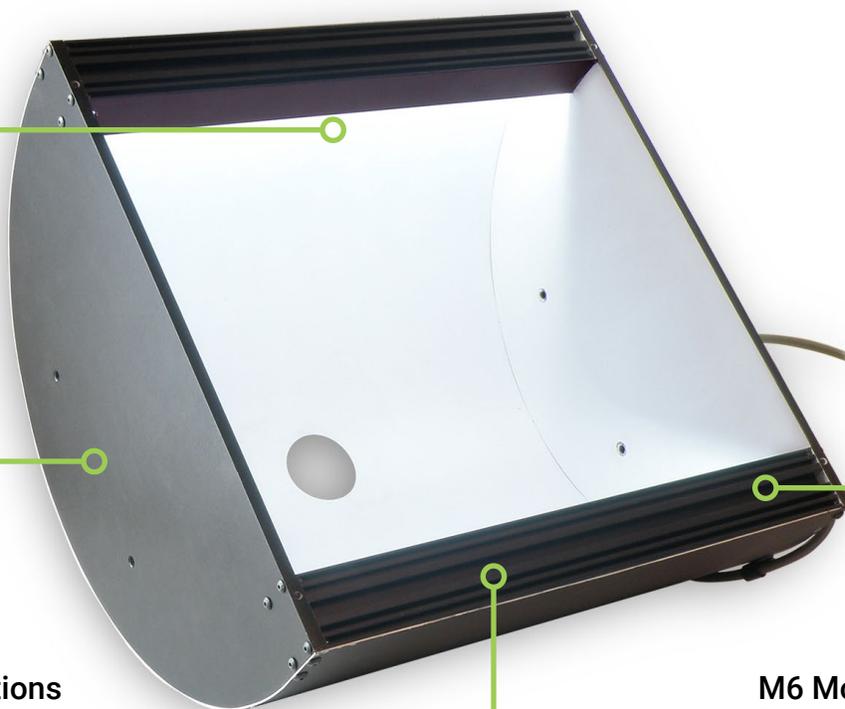

#### Multiple Control Options

As with many Ai lighting products, cable inline and external controllers are available

#### M6 Mounting Channels

Engineered with two M6 mounting channels on both ends, allowing for highly adjustable positioning

### DL067 Series Description

The DL067 large area tunnel light is designed for use in specular reflective area scan camera applications requiring indirect diffused light, especially curved surfaces.

The DL067 is part of the Advanced illumination's Expandable Series of lights that is available in multiple lengths from 6" to 36" long, where 12" x 12" emitting area size is standard.

A 1.5" dia, centered camera view port is standard and 2, 3 and 4 port models are available as BTOs. Customer specified port diameters (including elongated ports), and locations are available as custom variations.



**High Intensity**



**11 Wavelengths Available**



**Multiple Control Options**



**1-2 Week BTO Lead Times Typical**

**General Information**

**General Specifications**

Category	Specification	Detail			
<b>Optical</b>	Available Wavelengths	White, 455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, 660 nm, 730 nm, 850 nm, 940 nm			
	Available Lensing	No Lenses			
	Available Light Conditioning	None			
<b>Electrical</b>	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>			
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain			
<b>Mechanical</b>	Sizing Info	Standard	Length	6.8" (172.7mm) to 36.8" (934.7mm)	<a href="#">See Page 7 for More Details</a>
		Width	12.08" (306.8 mm)		
		Height	7.12" (180.8 mm)		
	Weight Info (Standard)	~ 2.55 lbs (~1156 g) per 6" Unit Length			
	Mounting Info	M6 Mounting Screws			
	Material Info	Anodized Aluminum Housing, Cold Rolled Steel, Acrylic Window, Nylon Strain Relief, PVC Cable Jacket, Steel Black Oxide & Zinc Plated Steel Fasteners			
<b>Thermal</b>	Operating Case Temperatures	25 °C to 60 °C			
	Operating Ambient Temperatures	0 °C to 35 °C			
	Compliance	CE, RoHS, IEC 62471			
<b>Certification</b>	IP Rating	Not Rated			
	Lumen Maintenance - White Only	L70 (50,000 Hours)			

**General Information - Continued**

**Part Number Key**

Model	View Port	Emitting Length (in)	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL067	X	XX	-	XXX	XX	-	XXX
DL067	A (1 Hole)	06" increments from 06" to 36"		455 (royal blue)	C1		M8 <sup>1</sup>
	B (2 Holes)			470 (blue)	C5		M12 <sup>1</sup>
	C (3 Holes)			505 (cyan)	IC <sup>2</sup>		
	D (4 Holes)			530 (green)	I3 <sup>2</sup>		
				590 (amber)	I3S <sup>2</sup>		
				625 (red orange)	I4		
				660 (red)	24		
				730 (IR)			
				850 (IR)			
				940 (IR)			
				WHI (white)			
more info on page	7	7		4	8		10

**Example Part Numbers:**

DL067B06-625C1  
DL067C12-WHII3

<sup>1</sup>Available with 24, IC, I3, I3S, and I4 options only  
<sup>2</sup>Maximum length: 12"


**In Stock**

Unavailable

**Lead Times**

Stock products ship within three days.  
**Build to Order:** 12" A view; one hole shipped within two weeks;  
Six weeks for all others

**Configurator**

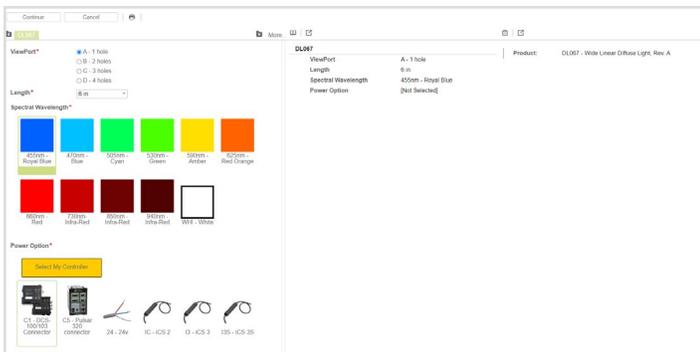


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL067 Wide Linear Diffuse Light to your specific needs. For a guided configuration, visit our [online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 200 mm Working Distance**

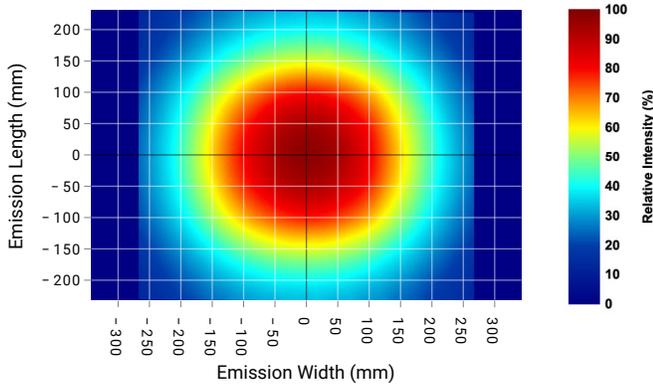


Intensity distribution sample image was taken with a 12-inch white DL067 unit.

**Illuminance vs Working Distance**

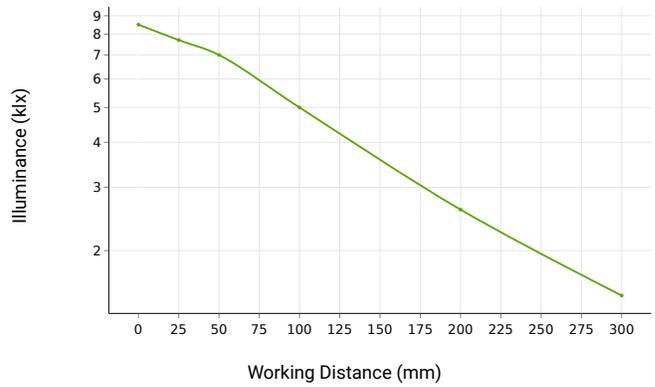


Illuminance data was collected using a 12-inch white DL067 unit.

**FWHM vs Working Distance**

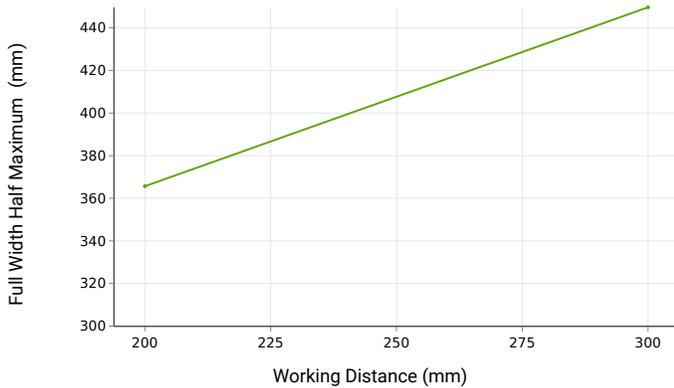

Full Width Half Maximum (FWHM) data collected using a white DL067 unit.


**Continuous vs Strobe Intensity**

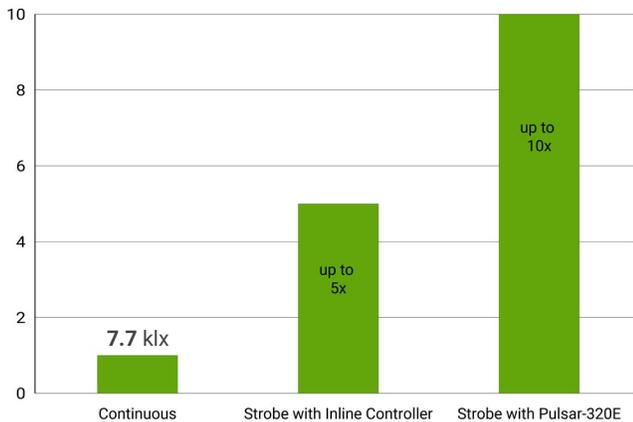

Under continuous operation, a 12-inch white DL067 unit will output an **illuminance of 7.7 klx** and an **irradiance of 24.8 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL067 Series has been engineered to be overdrive strobe capable. When configured with Aii's strobe enabled Inline Controller (I3, and I3s), the DL067 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with Aii's Pulsar 320E, a **DL067 can be strobed up-to 10X continuous intensity levels.**

**Optical Information - Continued**

**White Spectral Profile**

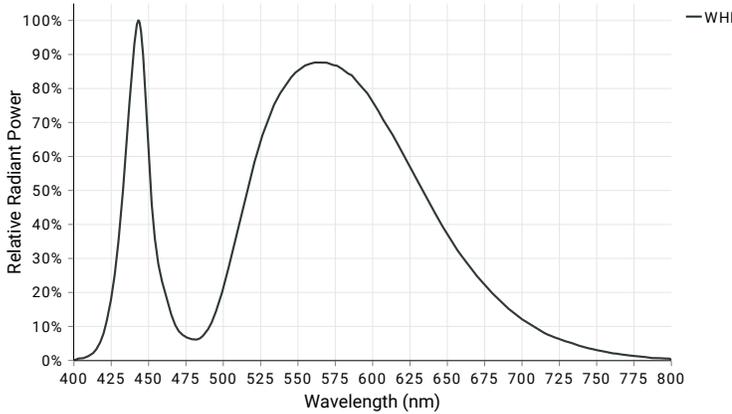


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL067 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

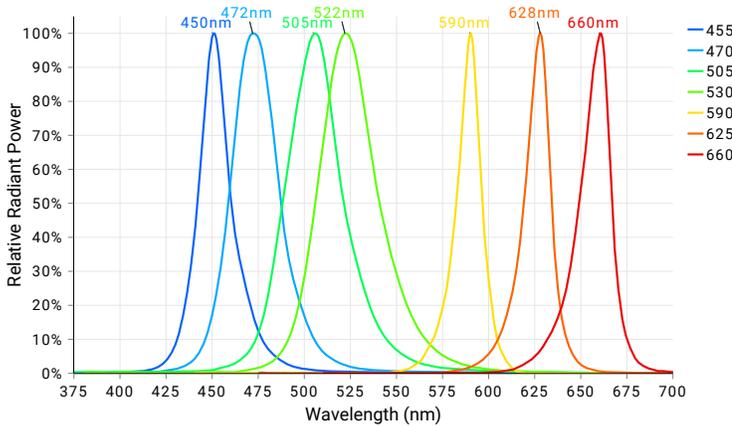


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL067 Series is available in **455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, and 660 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

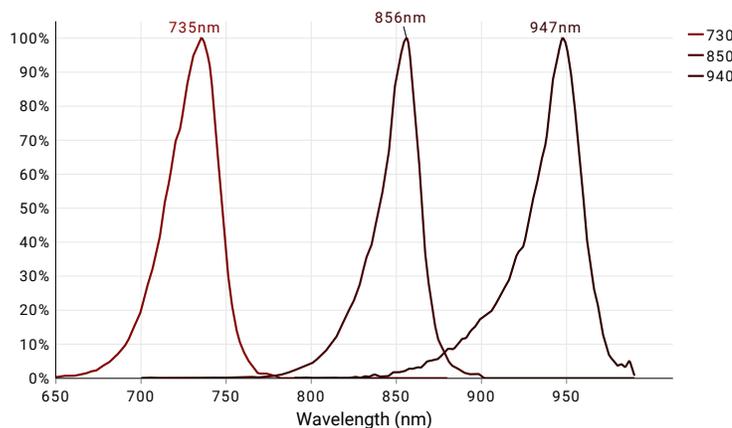

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL067 Series is available in a **730 m, 850 nm, and 940 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	730, 850, 940
Group 1	No Photobiological hazard under normal behavioral limitations	455, 470, 505, 530, 590, 625, 660
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	White

Advanced Illumination's lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light's optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: "If it's not dirty, don't clean it." Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

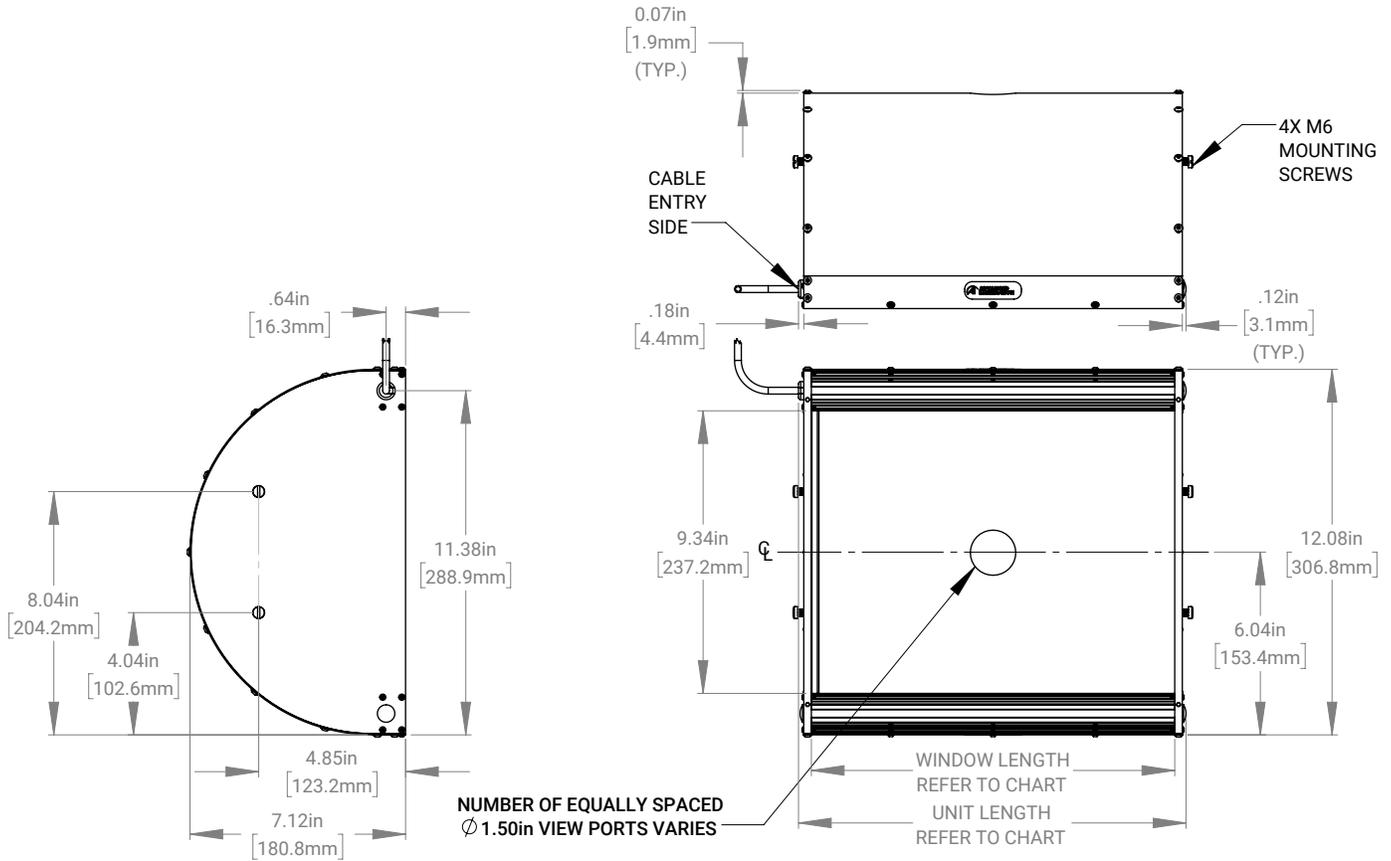

For full installation drawings and complete CAD models of this non-sealed configuration, please visit the [downloads section of the product webpage](#).

**Sizing Chart**

Part Number	Length (Inches)		Length (Millimeters)		Max # of View Ports
	Unit	Window	Unit	Window	
DL06706	6.80	6.00	172.72	152.40	2
DL06712	12.80	12.00	325.12	304.80	3
DL06718	18.80	18.00	477.52	457.20	4
DL06724	24.80	24.00	629.92	609.60	4
DL06730	30.80	30.00	782.32	762.00	4
DL06736	36.80	36.00	934.72	914.40	4

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**


Wavelengths (nm)	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S, I4)
WHI, 455, 470, 505, 530	0.700A per 6 inch increment	0.500A per 6 inch increment
590, 625, 660, 730	0.700A per 6 inch increment	0.335A per 6 inch increment
850, 940	0.700A per 6 inch increment	0.450A per 6 inch increment

Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous <b>Output Current:</b> 1.25 A Max Continuous <b>I/O:</b> 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I4 Configurations</b> <i>PN: N/A</i></p> <p>The I4 is an inline, cable-mounted continuous and pulse (overdrive strobe) capable controller configured/wired directly for the ordered light head. The I4 can either be operated with a PNP or NPN trigger signal.</p> <p><b>Output Power:</b> 50 W Max Continuous, 150 W Max Pulsed <b>Output Current:</b> 2.1 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**

**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	NPN/Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	0-10 V Analog Dimming	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
		<p><b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

### Additional Information

#### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

#### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliance documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

#### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

#### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

#### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# DL071 Series

## Large Area Diffuse Lights

### Product Datasheet




#### Multiple Control Options

As with many Ai lighting products, cable inline and external controllers are available

#### M6 Mounting Channels

Engineered with four M6 mounting points on the top surface for highly adjustable positioning

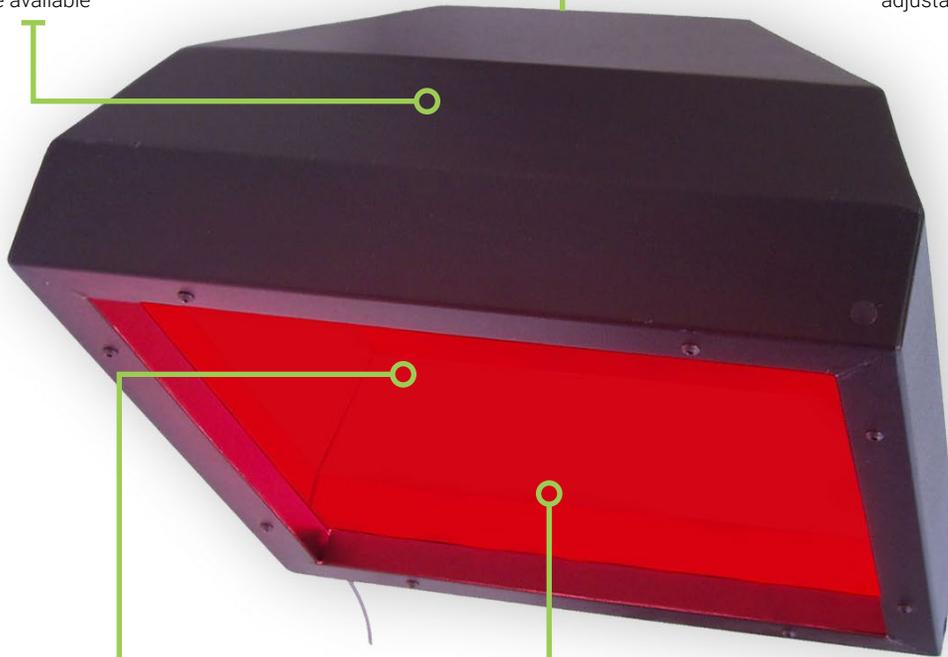

#### High Power LEDs

Equipped with industrial grade LEDs capable of high output strobe and continuous operation, all while maintaining a long lifespan

#### Indirect Diffuse Multi-Angle and Multi-Direction Illumination

High Intensity LEDs create a large-area hemispherical light geometry for curved, reflective surfaces

### DL071 Series Description

Utilizing high power LEDs, the DL071 is engineered to provide uniform light for medium to large target area coverage.

The DL071 is best suited for inspection on curved surfaces where even illumination is necessary to avoid hot-spot reflections and where the working envelope is free of space constraints.

Similarly to the smaller DL194 and DL097 hemispherical domes, the DL071 is available in wide range of visible and NIR wavelengths, as well as a variety of control options.



**High Intensity**



**11 Wavelengths Available**



**Multiple Control Options**



**1-2 Week BTO Lead Times Typical**

**General Information**

**General Specifications**

Category	Specification	Detail			
<b>Optical</b>	Available Wavelengths	White, 455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, 660 nm, 730 nm, 850 nm, 940 nm			
	Available Lensing	N/A			
	Available Light Conditioning	None			
<b>Electrical</b>	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>			
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain			
<b>Mechanical</b>	Sizing Info	Standard	Length	20.9"(530.9mm)	<a href="#">See Page 7 for More Details</a>
		Width	21.73"(552.0mm)		
		Height	11.7" (297.3 mm)		
	Weight Info (Standard)	~ 13.60 lbs (~6168 g) per Unit			
	Mounting Info	M6 Mounting Nuts			
	Material Info	Painted & Polyurethane Aluminum Housing, Acrylic Window, Nylon Strain Relief, PVC Cable Jacket, Steel Black Oxide Fasteners			
<b>Thermal</b>	Operating Case Temperatures	25 °C to 60 °C			
	Operating Ambient Temperatures	0 °C to 35 °C			
<b>Certification</b>	Compliance	CE, RoHS, IEC 62471			
	IP Rating	Not Rated			
	Lumen Maintenance - White Only	L70 (50,000 Hours)			

**General Information - Continued**

**Part Number Key**

Model	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL071	-	XXX	XX	-	XXX
DL071		455 (royal blue)	C1		M8 <sup>1</sup>
		470 (blue)	C5		M12 <sup>1</sup>
		505 (cyan)	IC		
		530 (green)	I3		
		590 (amber)	I3S		
		625 (red orange)	24		
		660 (red)			
		730 (IR)			
		850 (IR)			
		940 (IR)			
		WHI (white)			
more info on page		4	8	10	

**Example Part Numbers:**

DL071-470C5  
DL071-625I3-M12

<sup>1</sup> Available with 24, IC, I3, and I3S options only


**In Stock**

**Lead Times**

Unavailable

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Configurator**

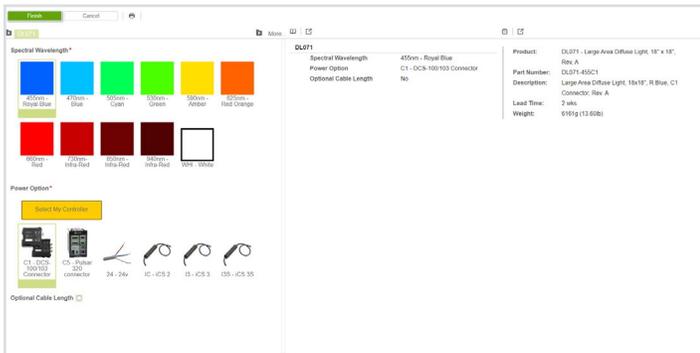


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL071 Large Area Diffuse Light to your specific needs. For a guided configuration, visit our [online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 25 mm Working Distance**

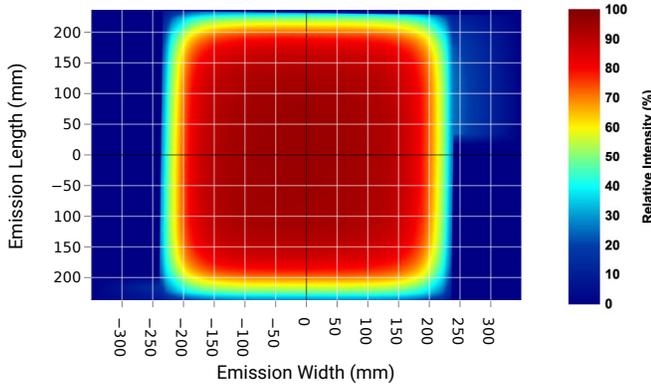


Intensity distribution sample image was taken with a white DL071 unit.

**Illuminance vs Working Distance**

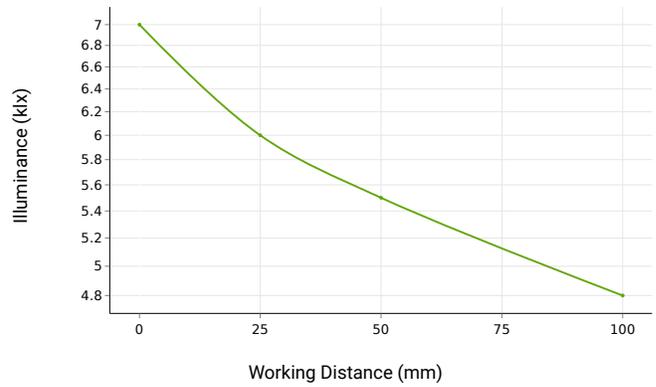


Illuminance data was collected using a white DL071 unit.

**FWHM vs Working Distance**

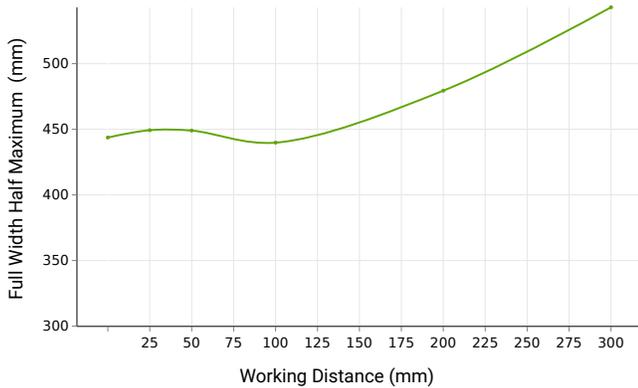

Full Width Half Maximum (FWHM) data collected using a white DL071 unit.

**Continuous vs Strobe Intensity**

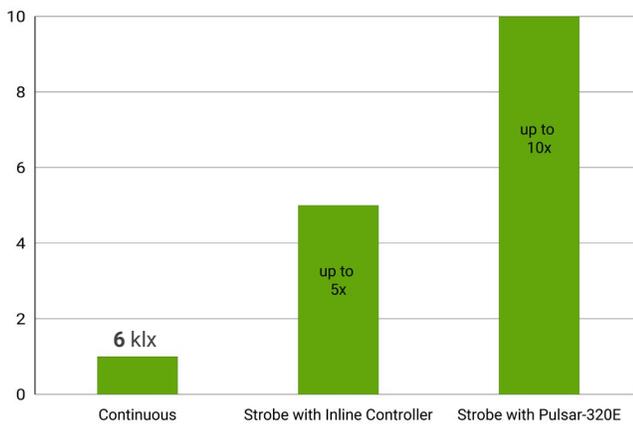


Under continuous operation, a white DL071 unit will output an **illuminance of 6 klx** and an **irradiance of 18.2 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL071 Series has been engineered to be overdrive strobe capable. When configured with AI's strobe enabled Inline Controller (I3, and I3s), the DL071 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with AI's Pulsar 320E, a **DL071 can be strobed up-to 10X continuous intensity levels.**

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**White Spectral Profile**

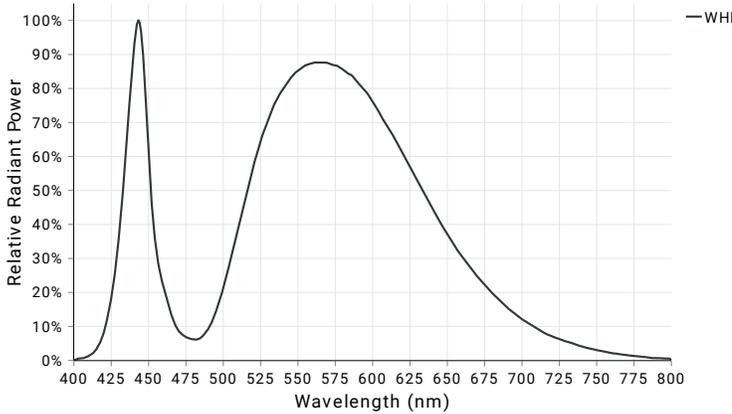


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL071 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

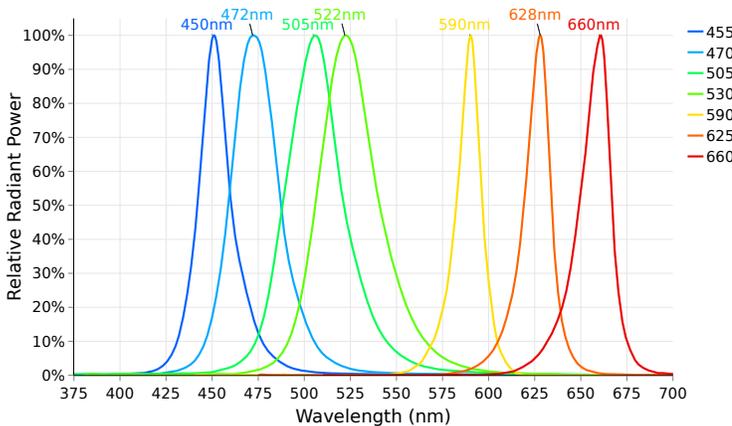


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL071 Series is available in **455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, and 660 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

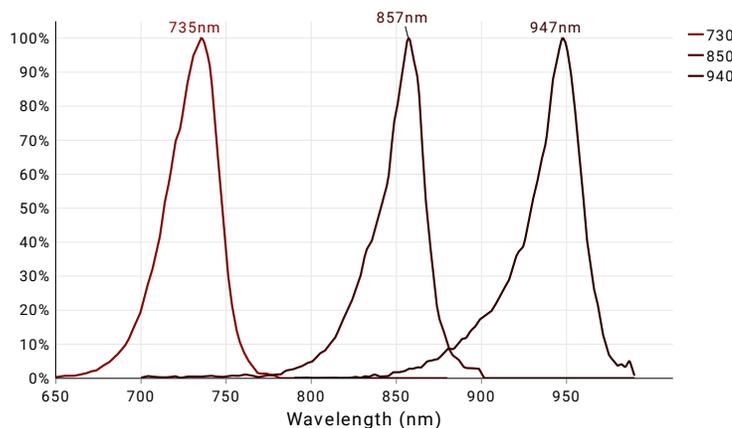

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL071 Series is available in a **730 m, 850 nm, and 940 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	730, 850, 940
Group 1	No Photobiological hazard under normal behavioral limitations	455, 470, 505, 530, 590, 625, 660, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	N/A

Advanced Illumination's lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light's optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: "If it's not dirty, don't clean it." Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

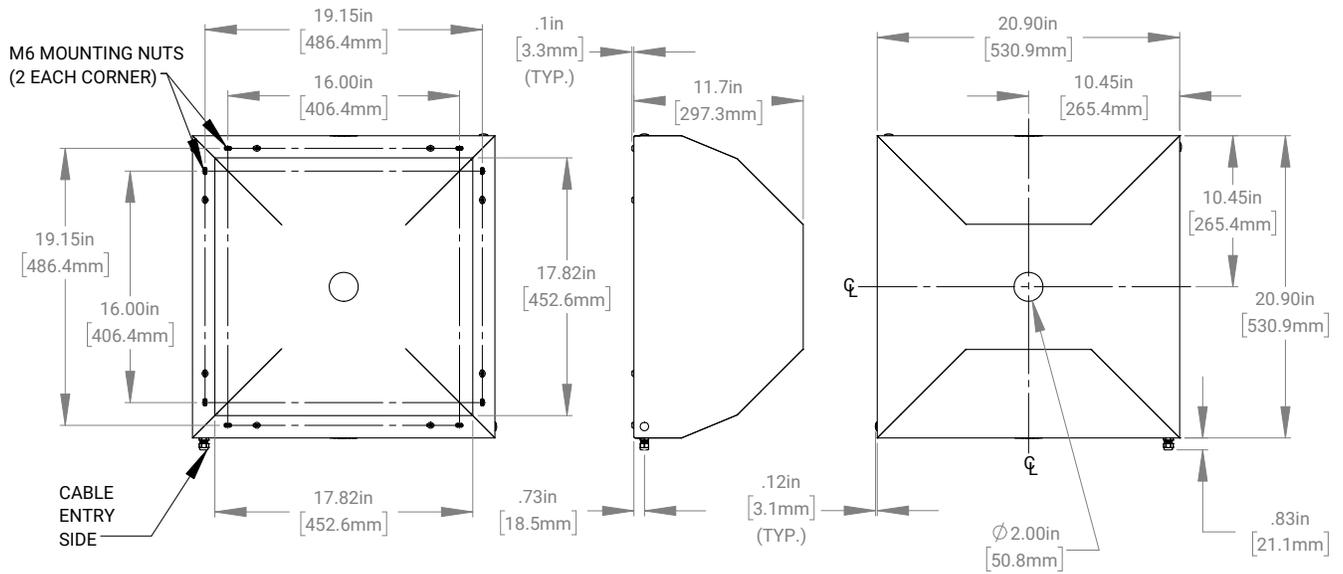

For full installation drawings and complete CAD models of this configuration, please visit the [downloads section of the product webpage](#).

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**

Wavelengths (nm)	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S)
WHI, 455, 470, 505, 530	0.500A	1.020A
590, 625	0.900A	1.050A
660, 730, 850, 940	1.000A	0.800A


Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous  <b>Output Current:</b> 1.25 A Max Continuous  <b>I/O:</b> 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed  <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent)  <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation  <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**

**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	NPN/Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	0-10 V Analog Dimming	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

### Additional Information

#### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

#### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliance documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

#### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

#### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

#### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# DL151 Series

## Narrow Linear Diffuse Lights

### Product Datasheet



**Scalable Extrusion-Based Housing**  
Built with extrusion-based aluminum construction allowing for linear, one-dimensional scalability, while maintaining structural rigidity and durability

**Multiple Control Options**  
As with many Ai lighting products, cable inline and external controllers are available



**M6 Mounting Channels**  
Engineered with two M6 mounting channels on both ends, allowing for highly adjustable positioning

### DL151 Series Description

The DL151 diffuse tunnel light is engineered for use in linescan camera applications requiring indirect diffused light from multiple angles of incidence.

As part of Advanced illumination's Expandable Series of lights, the DL151 is available in multiple lengths from 2" to 12" long.

The DL151 differs from the DL067 large area tunnel in being smaller, suitable for linescan based inspection applications, and has no options for port locations or size.



**Medium Intensity**



**16 Available Wavelengths**



**Multiple Control Options**



**1-2 Week BTO Lead Times Typical**

**General Information**

**General Specifications**

Category	Specification	Detail			
<b>Optical</b>	Available Wavelengths	White, 455 nm, 470 nm, 530 nm, 590 nm, 625 nm, 850 nm, 940 nm			
	Available Lensing	No Lenses			
	Available Light Conditioning	None			
<b>Electrical</b>	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>			
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain			
<b>Mechanical</b>	Sizing Info	Standard	Length	2.67"(67.7mm) to 12.67"(321.7mm)	<a href="#">See Page 7 for More Details</a>
		Width	3.07"(77.9mm)		
		Height	1.60"(40.7mm)		
	Weight Info (Standard)	~ 0.93 lbs (~421 g) per 12" Unit Length			
	Mounting Info	M6 Mounting Nut Channel			
	Material Info	Anodized Aluminum Housing, Nylon Strain Relief, PVC Cable Jacket, Steel Black Oxide & Zinc Plated Steel			
<b>Thermal</b>	Operating Case Temperatures	25 °C to 60 °C			
	Operating Ambient Temperatures	0 °C to 35 °C			
<b>Certification</b>	Compliance	CE, RoHS, IEC 62471			
	IP Rating	Not Rated			
	Lumen Maintenance - White Only	L70 (50,000 Hours)			

**General Information - Continued**

**Part Number Key**

Model	Emitting Length (in)	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL151	XX	-	XXX	XX	-	XXX
DL151	02" increments from 02" to 70"		455 (royal blue)	C1		M8 <sup>1</sup>
			470 (blue)	C5		M12 <sup>1</sup>
			530 (green)	IC		
			590 (amber)	I3		
			625 (red orange)	I3S		
			850 (IR)	I4		
			940 (IR)	24		
			WHI (white)			
more info on page	7		4	9		11

**Example Part Numbers:**

DL15112-625C1  
DL15106-WHI13

<sup>1</sup>Available with 24, IC, I3, I3S, and I4 options only


**In Stock**

**Lead Times**

Unavailable

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Configurator**

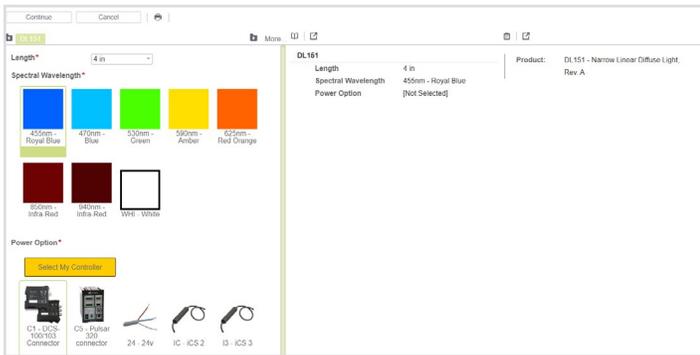


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL151 Narrow Linear Diffuse Light to your specific needs. For a guided configuration, [visit our online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 25 mm Working Distance**

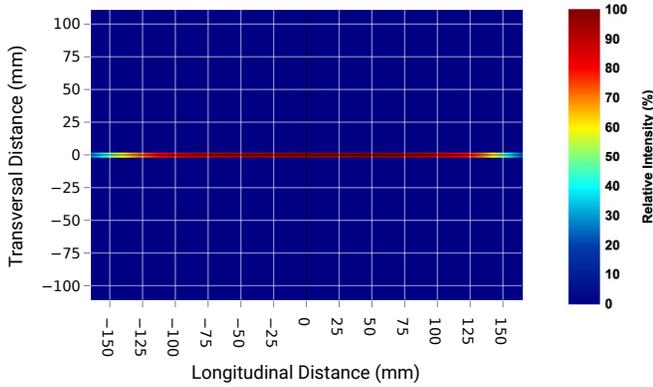

Intensity distribution sample image was taken with a 12-inch white DL151 unit.


**Illuminance vs Working Distance**

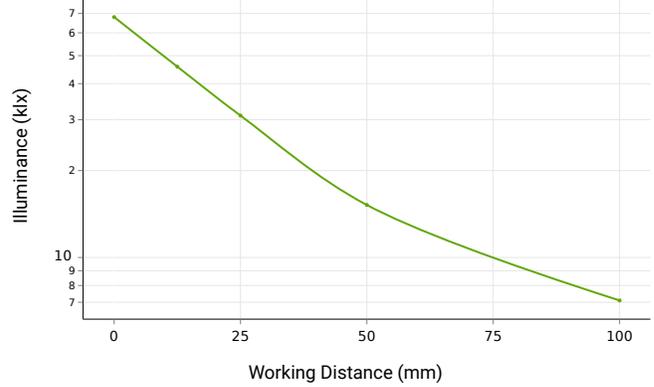

Illuminance data was collected using a 12-inch white DL151 unit.


**Uniformity**

**Line Intensity Distribution Profile at 25 mm Working Distance**

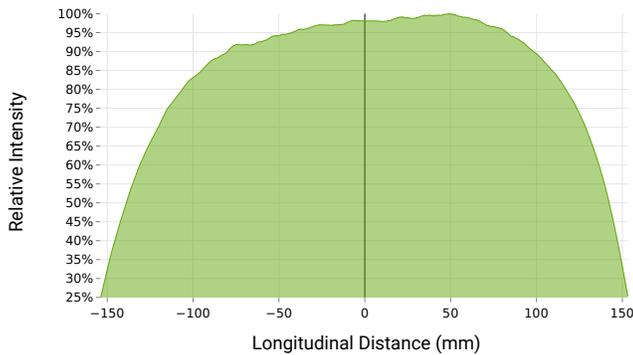

Line Intensity Distribution Profile data collected using a white 12-inch DL151 unit.

**Continuous vs Strobe Intensity**

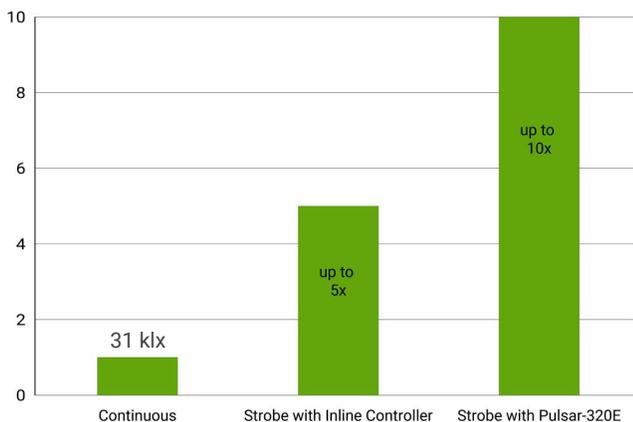


Under continuous operation, a white DL151 unit will output an **illuminance of 31 klx** and an **irradiance of 105.4 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL151 Series has been engineered to be overdrive strobe capable. When configured with AI's strobe enabled Inline Controller (I3, and I3s), the DL151 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with AI's Pulsar 320E, a **DL151 can be strobed up-to 10X continuous intensity levels.**

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**White Spectral Profile**

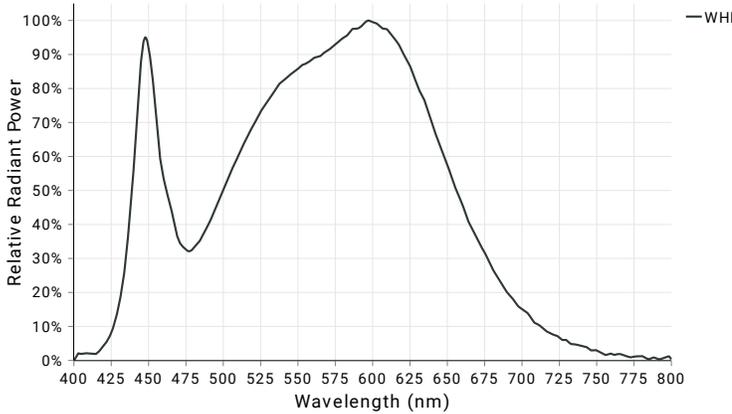


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL151 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

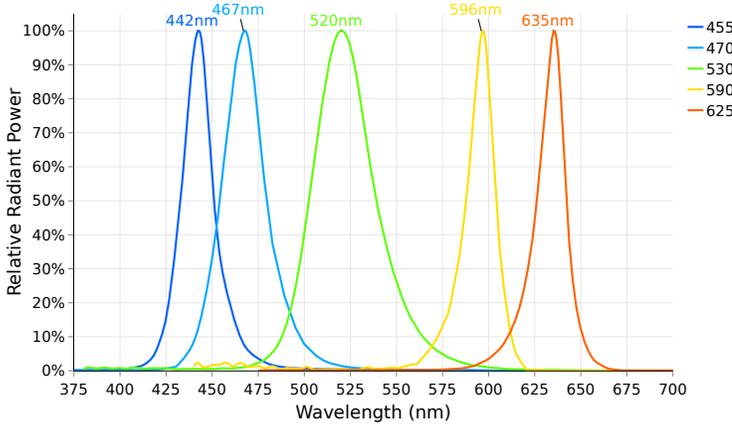


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL151 Series is available in **455 nm, 470 nm, 530 nm, 590 nm, and 625 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

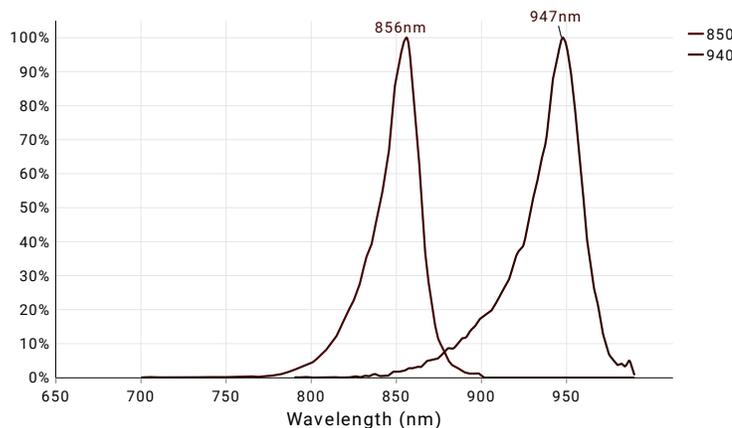

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL151 Series is available in **850 nm and 940 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	850, 940
Group 1	No Photobiological hazard under normal behavioral limitations	455, 470, 530, 590 , 625, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	N/A

Advanced Illumination’s lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light’s optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: “If it’s not dirty, don’t clean it.” Avoid wiping optics when possible.

If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.


Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**


**Installation Drawings**

**Single Cable Configuration**

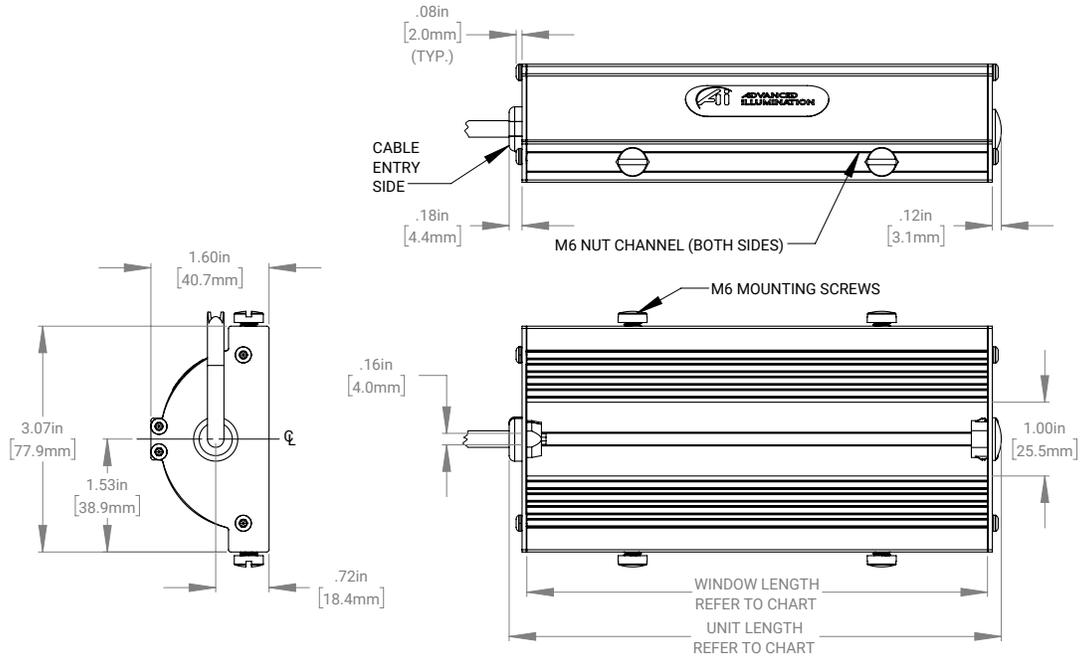

For full installation drawings and complete CAD models of this single cable configuration, please visit the [downloads](#) section of the product webpage.

**Dual Cable Configuration**

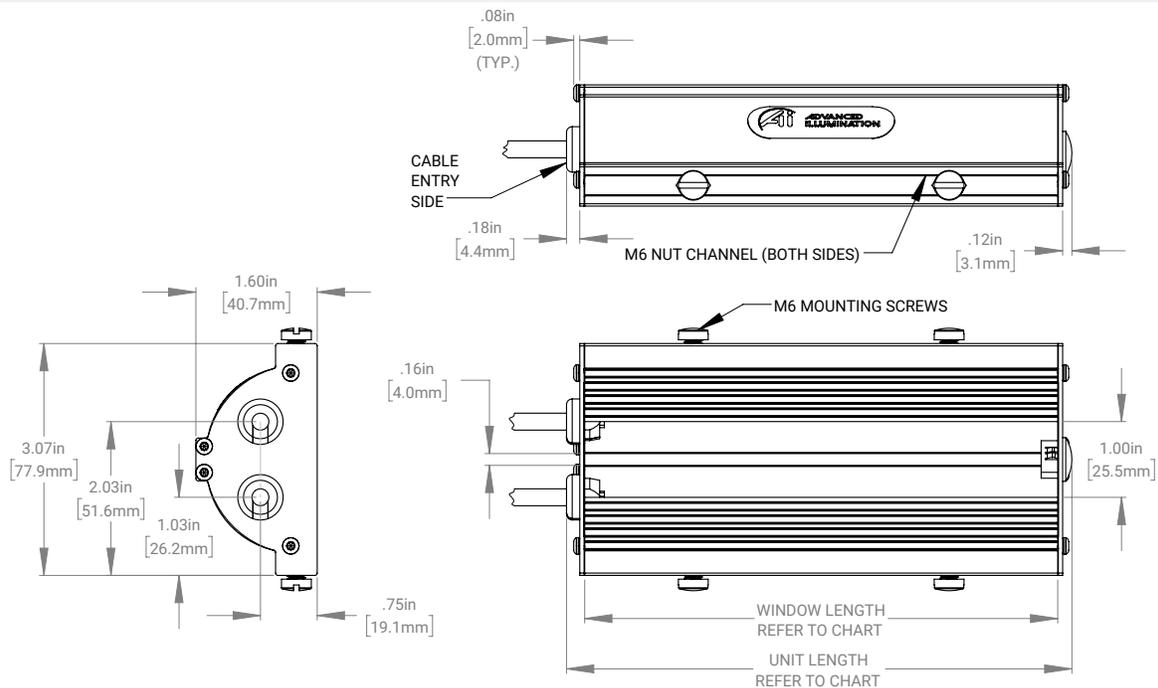

For full installation drawings and complete CAD models of this dual cable configuration, please visit the [downloads](#) section of the product webpage.

**Mechanical Information**

**Sizing Info**

Part Number	Length (Inches)	Length (Millimeters)	Power Options
	Unit	Unit	
DL15102	2.67	67.82	C1 /C5/ 24 / IC / I3 / I3S
DL15104	4.67	118.62	C1 /C5/ 24 / IC / I3 / I3S
DL15106	6.67	169.42	C1 /C5/ 24 / IC / I3 / I3S
DL15108	8.67	220.22	C1 /C5/ 24 / IC / I3 / I3S
DL15110	10.67	271.02	C1 /C5/ 24 / IC / I3 / I3S
DL15112	12.67	321.82	C1 /C5/ 24 / IC / I3 / I3S
DL15114	14.67	372.62	C1 /C5/ 24 / IC / I3 / I3S
DL15116	16.67	423.42	C1 /C5/ 24 / IC / I3 / I3S
DL15118	18.67	474.22	C1 /C5/ 24 / IC / I3 / I3S
DL15120	20.67	525.02	C1 /C5/ 24 / IC / I3 / I3S
DL15122	22.67	575.82	C1 /C5/ 24 / IC / I3 / I3S
DL15124	24.67	626.62	C1 /C5/ 24 / IC / I3 / I3S
DL15126	26.67	677.42	C1 /C5/ 24
DL15128	28.67	728.22	C1 /C5/ 24
DL15130	30.67	779.02	C1 /C5/ 24
DL15132	32.67	829.82	C1 /C5/ 24
DL15134	34.67	880.62	C1 /C5/ 24
DL15136	36.67	931.42	C1 /C5/ 24
DL15138	38.67	982.22	C5/ 24
DL15140	40.67	1033.02	C5/ 24
DL15142	42.67	1083.82	C5/ 24
DL15144	44.67	1134.62	C5/ 24
DL15146	46.67	1185.42	C5/ 24
DL15148	48.67	1236.22	C5/ 24
DL15150	50.67	1287.02	24
DL15152	52.67	1337.82	24
DL15154	54.67	1388.62	24
DL15156	56.67	1439.42	24
DL15158	58.67	1490.22	24
DL15160	60.67	1541.02	24
DL15162	62.67	1591.82	24
DL15164	64.67	1642.62	24
DL15166	66.67	1693.42	24
DL15168	68.67	1744.22	24
DL15170	70.67	1795.02	24

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**


Wavelengths (nm)	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S, I4)
WHI, 455, 470, 530	0.060A per 2 inch increment	0.070 per 2 inch increment
590, 625, 850, 940	0.060A per 2 inch increment	0.050A per 2 inch increment

Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous <b>Output Current:</b> 1.25 A Max Continuous <b>I/O:</b> 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I4 Configurations</b> <i>PN: N/A</i></p> <p>The I4 is an inline, cable-mounted continuous and pulse (overdrive strobe) capable controller configured/wired directly for the ordered light head. The I4 can either be operated with a PNP or NPN trigger signal.</p> <p><b>Output Power:</b> 50 W Max Continuous, 150 W Max Pulsed <b>Output Current:</b> 2.1 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**

**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	NPN/Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	0-10 V Analog Dimming	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	<p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<b>24 Volt DC Power Supply</b> PN: PS24-TL  This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.  For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a> .
		<b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP  The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.  For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a> .
Dimmer		<b>Manual Dimming Accessory for the IC</b> PN: MP-ICS  The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.  For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a> .

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

### Additional Information

#### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

#### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliancy documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

#### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

#### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

#### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# DL194

## Small Dome Light | Product Datasheet




### RGB Output Option

Developed specifically for use with Advanced illumination's multi-channel controllers

### High Power LEDs

Equipped with industrial grade LEDs capable of high output strobe and continuous operation, all while maintaining a long lifespan

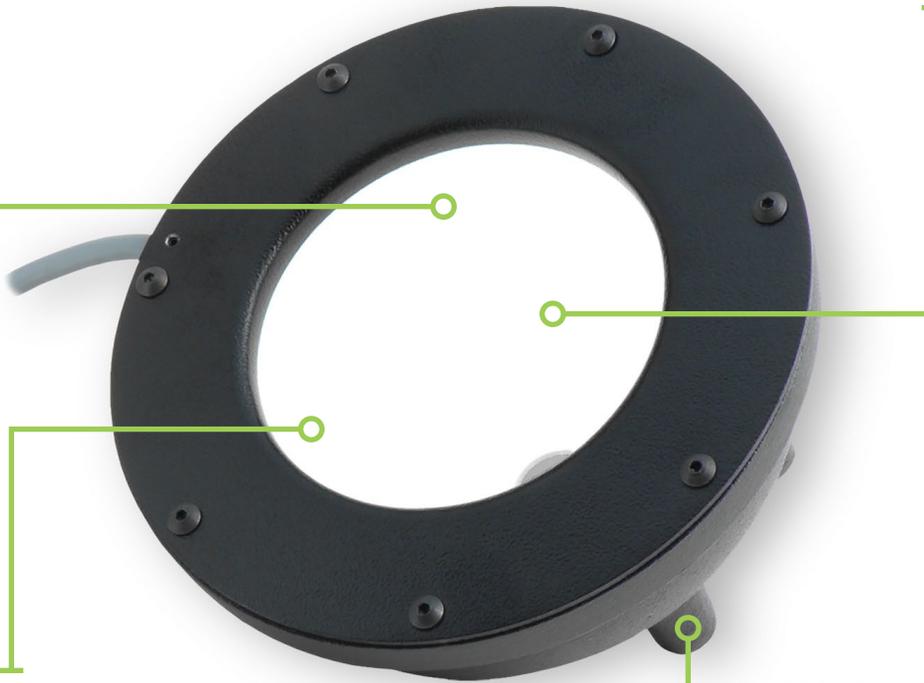

### Indirect Diffuse Multi-Angle and Multi-Direction Illumination

High Intensity LEDs create a medium small area hemispherical light geometry for curved, reflective surfaces

### M6 Mounting Points

Engineered with four M6 mounting points on the top surface for highly adjustable positioning

## DL194 Series Description

Utilizing high power LEDs, the DL194 is engineered to provide class-leading intensity for small to medium sized target area coverage.

As is typical for all hemispherical dome lights, the DL194 is best suited for inspection on curved surfaces where even illumination is necessary to avoid hot-spot reflections.

The DL194 is available in wide range of visible and NIR wavelengths, including an RGB option that is designed to operate with Advanced illumination's multi-channel current source controllers.



High Intensity



12 Available Wavelengths



RGB Option Available



Multiple Control Options



1-2 Week BTO Lead Times Typical

**General Information**

**General Specifications**

Category	Specification	Detail			
<b>Optical</b>	Available Wavelengths	White, 455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, 660 nm, 730 nm, 850 nm, 940 nm, RGB			
	Available Lensing	No Lenses			
	Available Light Conditioning	None			
<b>Electrical</b>	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>			
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain			
<b>Mechanical</b>	Sizing Info	Standard	Diameter	5.25"(133.4mm)	<a href="#">See Page 7 for More Details</a>
		Standard	Height	2.87"(72.9mm)	
	Weight Info (Standard)		~ 0.97 lbs (~440 g) per Unit		
	Mounting Info	M6 Mounting Holes			
<b>Thermal</b>	Material Info	Black Epoxy Powder Coat & White Enamel Painted Die Cast Aluminum Housing, PVC Cable Jacket, Steel Black Oxide Fasteners			
	Operating Case Temperatures	25 °C to 60 °C			
	Operating Ambient Temperatures	0 °C to 35 °C			
<b>Certification</b>	Compliance	CE, RoHS, IEC 62471			
	IP Rating	Not Rated			
	Lumen Maintenance - White Only	L70 (50,000 Hours)			

**General Information - Continued**

**Part Number Key**

Model	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL194	-	XXX	XX	-	XXX
DL194		455 (royal blue)	C1		M8 <sup>1</sup>
		470 (blue)	C5		M12 <sup>1</sup>
		505 (cyan)	IC		
		530 (green)	I3		
		590 (amber)	I3S		
		625 (red orange)	24		
		660 (red)			
		730 (IR)			
		940 (IR)			
		WHI (white)			
		RGB (all colors) <sup>2</sup>			
more info on page		5	8		10

**Example Part Numbers:**  
DL194-470C5  
DL194-625I3-M12

<sup>1</sup> Available with 24, IC, I3, and I3S options only  
<sup>2</sup> Available with C1 and 24 options only


**In Stock**

DL194-625IC  
DL194-WHIIC

**Lead Times**

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Configurator**

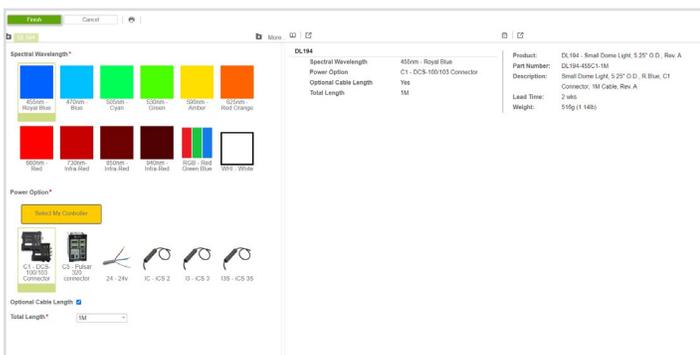


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL194 Small Dome Light to your specific needs. For a guided configuration, [visit our online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 25 mm Working Distance**

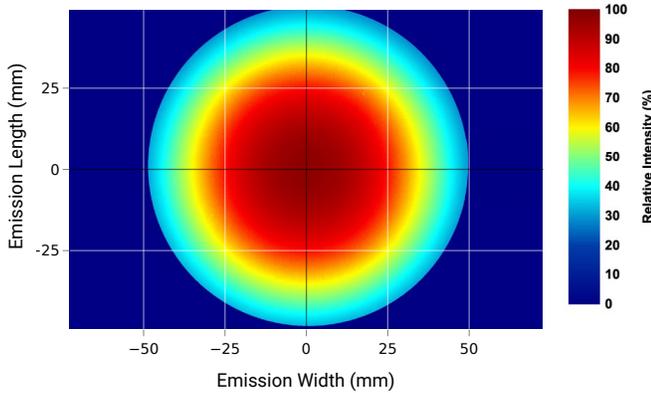


Intensity distribution sample image was taken with a white DL194 unit.

**Illuminance vs Working Distance**

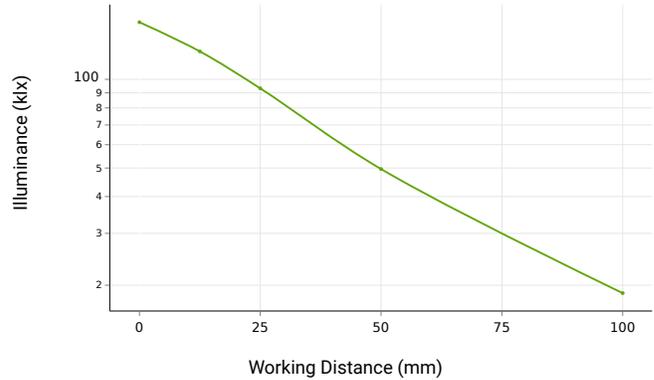


Illuminance data was collected using a white DL194 unit.

**FWHM vs Working Distance**

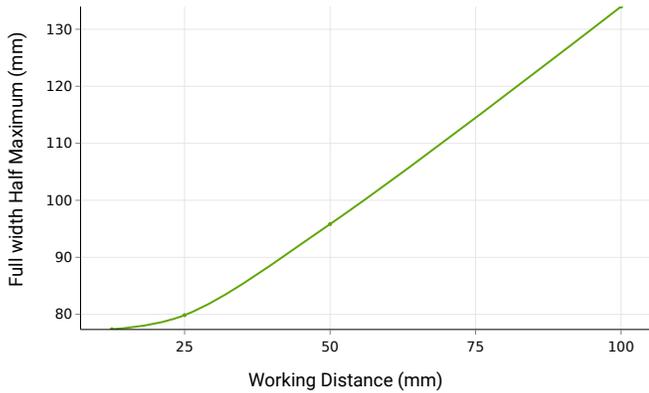

Full Width Half Maximum (FWHM) data collected using a white DL194 unit.

**Continuous vs Strobe Intensity**

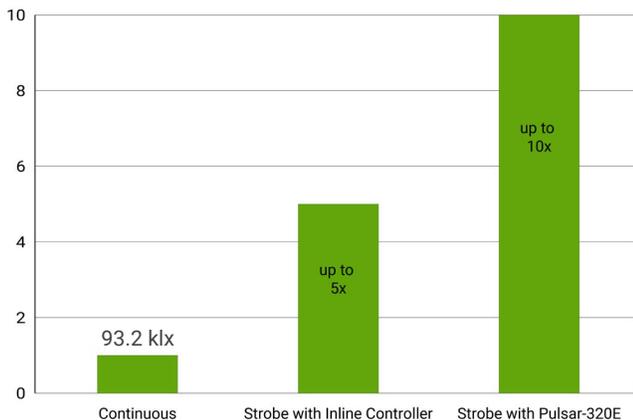


Under continuous operation, a white DL194 unit will output an **illuminance of 93.2 klx** and an **irradiance of 311.5 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL194 Series has been engineered to be overdrive strobe capable. When configured with AI's strobe enabled Inline Controller (I3, and I3s), the DL194 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with AI's Pulsar 320E, a **DL194 can be strobed up-to 10X continuous intensity levels.**

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**White Spectral Profile**

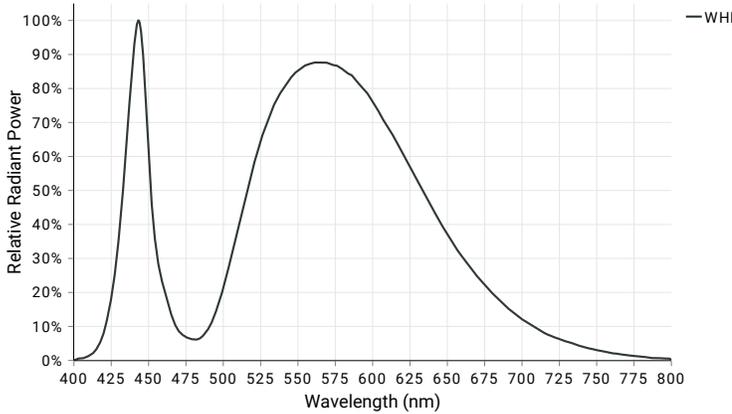


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL194 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

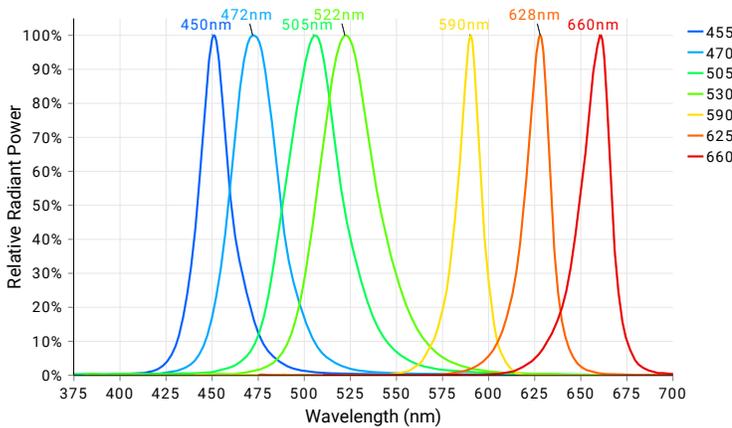


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL194 Series is available in **455 nm, 470 nm, 505 nm, 530 nm, 590 nm, 625 nm, and 660 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

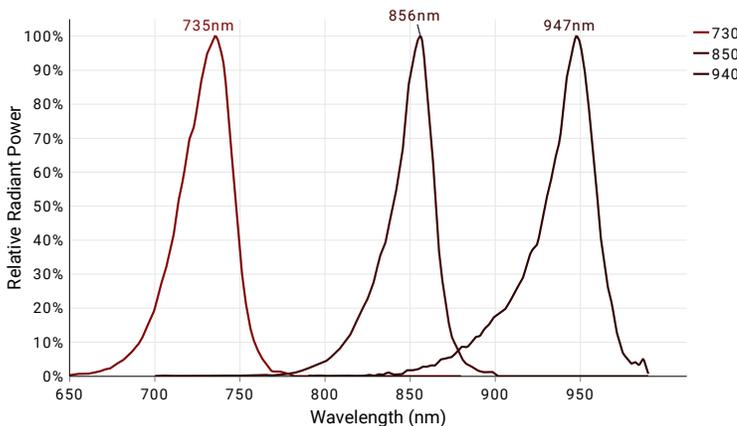

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL194 Series is available in **730 nm, 850 nm, and 940 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	730, 850, 940
Group 1	No Photobiological hazard under normal behavioral limitations	455, 470, 530, 590, 625, RGB, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	N/A

Advanced Illumination’s lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light’s optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: “If it’s not dirty, don’t clean it.” Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

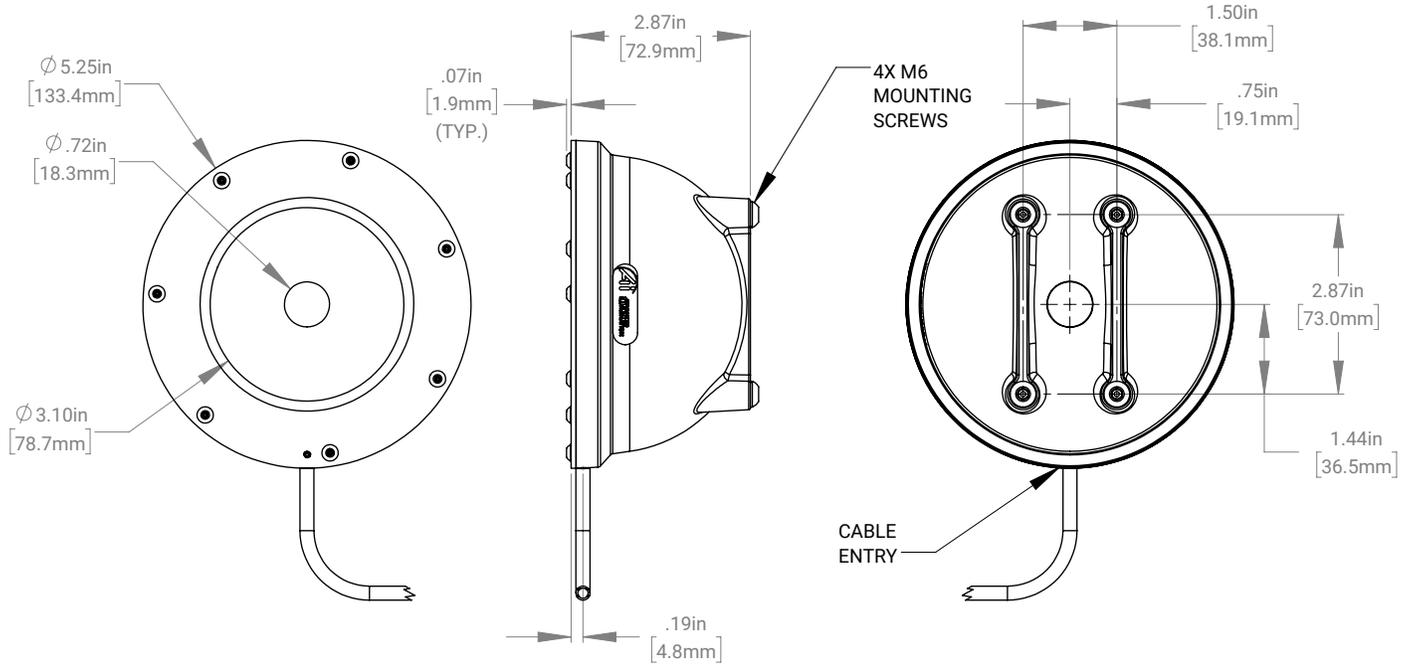

For full installation drawings and complete CAD models of this configuration, please visit the [downloads section of the product webpage](#).

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**

Wavelengths (nm)	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S)
WHI, 455	0.360A	0.800A
470, 505, 530, 590	0.360A	0.850A
625, 660, 730, 850, 940	0.360A	0.620A


Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**


**Control Options - Continued**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous  <b>Output Current:</b> 1.25 A Max Continuous  <b>I/O:</b> 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed  <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent)  <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation  <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**


**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
		<p><b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

## Additional Information

### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliancy documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# DL2230 Series

## Extra Small Dome Light Product Datasheet




### Compact, Space-Saving Design

Ideally suited for low speed inspection applications, yet requiring more power on target than similar compact dome lights

### M4 Mounting Points

Engineered with four opposing M4 mounting points for highly adjustable positioning

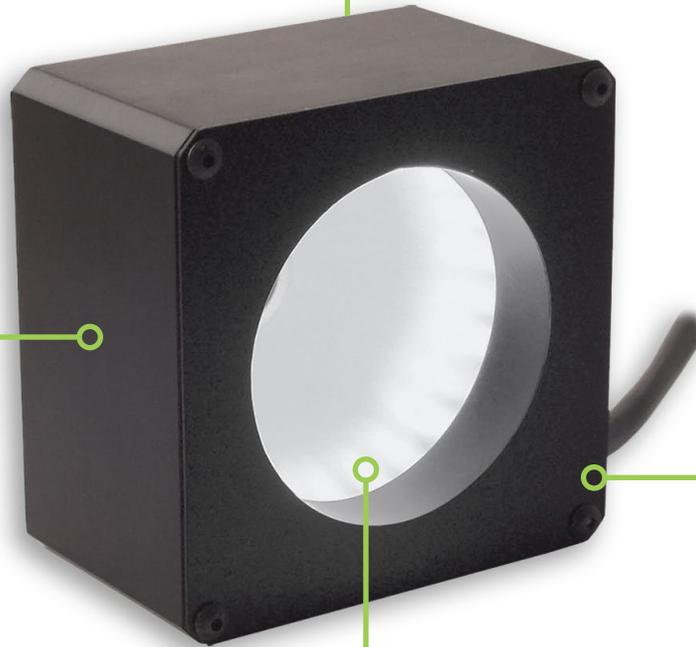

### Indirect Diffuse Multi-Angle and Multi-Direction Illumination

Evenlite targeted standard intensity LEDs create a small-area, hemispherical light geometry for curved, reflective surfaces

### Multiple Control Options

As with many Ai lighting products, cable inline and external controllers are available

## DL2230 Series Description

The DL2230 compact hemispherical dome is designed to fit into small spaces and best utilized on curved, specular reflective surfaces as very short working distances.

It is available in multiple visible wavelengths and 395nm UV and 880nm NIR. As is the case with most Advanced illumination lights, it is available in a variety of control options.

The DL2230 differs from other Ai dome lights in compactness and that it offers standard, rather than high intensity on target and is best utilized in moderate speed applications.



**Medium Intensity**



**7 Available Wavelengths**



**Multiple Control Options**



**1-2 Week BTO Lead Times Typical**

**General Information**

**General Specifications**

Category	Specification	Detail	
Optical	Available Wavelengths	White, 395 nm, 470 nm, 530 nm, 625 nm, 880 nm	
	Available Lensing	No Lenses	
	Available Light Conditioning	None	
Electrical	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>	
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain	
Mechanical	Sizing Info	Standard	
		Length	2.83"(71.9mm)
		Width	2.83"(71.9mm)
	Height	1.79"(45.4mm)	
		<a href="#">See Page 7 for More Details</a>	
	Weight Info (Standard)	~ 0.80 lbs (~362 g) per Unit	
	Mounting Info	M4 Mounting Holes	
	Material Info	Anodized Aluminum & Cold Rolled Steel Housing, PVC Cable Jacket, Steel Black Oxide Fasteners	
Thermal	Operating Case Temperatures	25 °C to 60 °C	
	Operating Ambient Temperatures	0 °C to 35 °C	
Certification	Compliance	CE, RoHS, IEC 62471	
	IP Rating	Not Rated	
	Lumen Maintenance - White Only	L70 (50,000 Hours)	

**General Information - Continued**

**Part Number Key**

Model	-	Peak Wavelength	Connector/Control	-	Alternative Connector
DL2230	-	XXX	XX	-	XXX
DL2230		395 (UV)	C1		M12 <sup>1</sup>
		470 (blue)	C5		M8 <sup>1</sup>
		520 (green)	IC		
		625 (red)	I3		
		880 (IR)	I3S		
		WHI (white)	24 <sup>2</sup>		
more information on page		4	8		10

**Example Part Numbers:**

DL2230-470C5  
DL2230-625I3-M12

<sup>1</sup> Available with 24, IC, I3, and I3S options only

<sup>2</sup> Not available in 395 (UV)


**In Stock**

Unavailable

**Lead Times**

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Online Configurator**

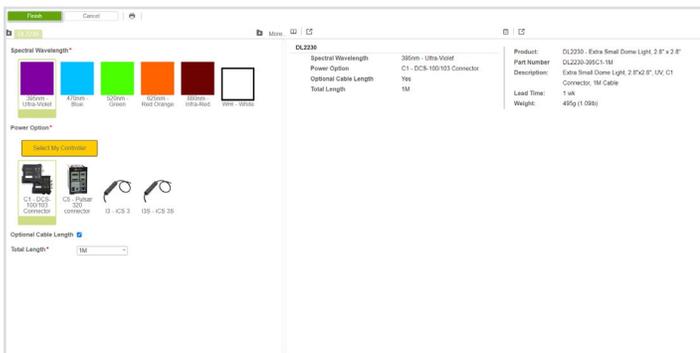


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our DL2230 Extra Small Dome Light to your specific needs. For a guided configuration, [visit our online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 25 mm Working Distance**

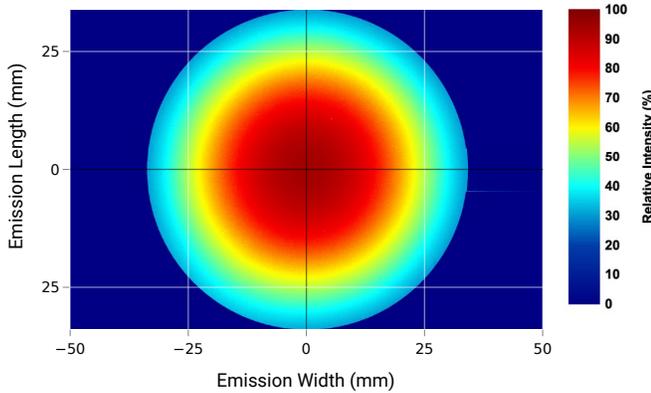


Intensity distribution sample image was taken with a white DL2230 unit.

**Illuminance vs Working Distance**

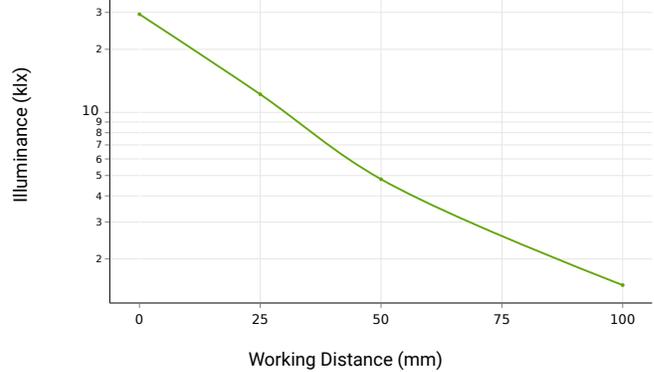


Illuminance data was collected using a white DL2230 unit.

**FWHM vs Working Distance**

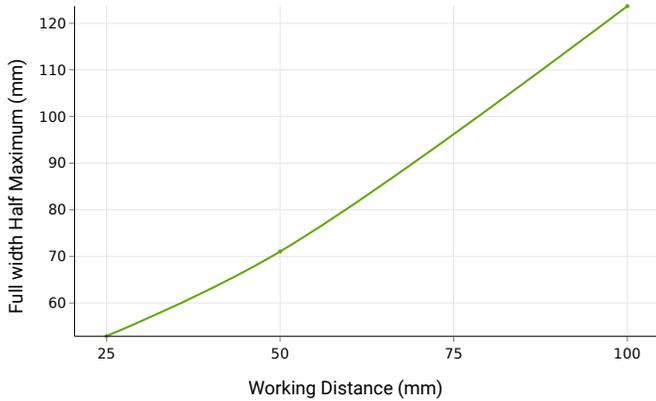

Full Width Half Maximum (FWHM) data collected using a white DL2230 unit.


**Continuous vs Strobe Intensity**

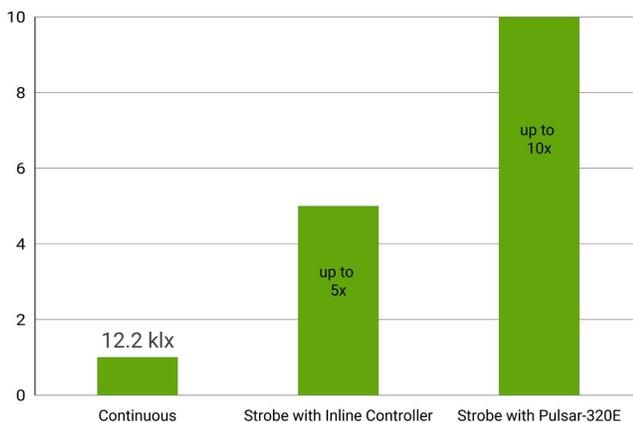

Under continuous operation, a white DL2230 unit will output an **illuminance of 12.2 klx** and an **irradiance of 44.6 W/m<sup>2</sup>** at a 25 mm working distance. For applications that require higher output, the DL2230 Series has been engineered to be overdrive strobe capable. When configured with AI's strobe enabled Inline Controller (I3, and I3s), the DL2230 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with AI's Pulsar 320E, a **DL2230 can be strobed up-to 10X continuous intensity levels.**

**Optical Information - Continued**

**White Spectral Profile**

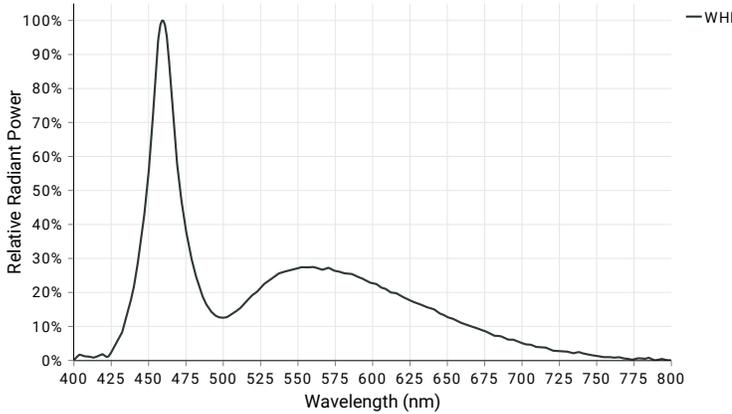


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The DL2230 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5500 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

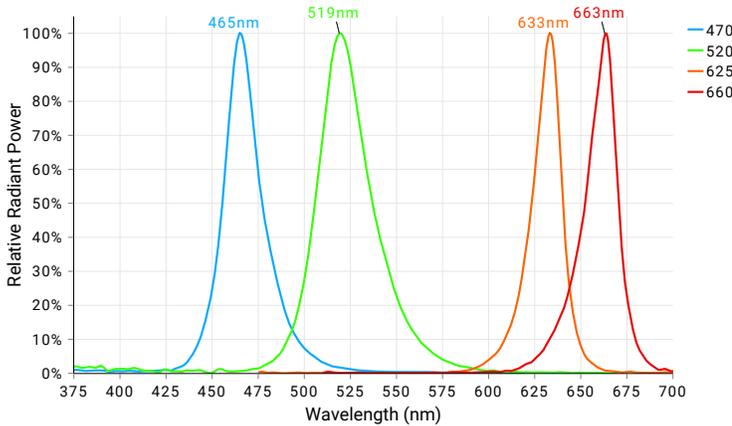


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The DL2230 Series is available in **470 nm, 520 nm, 625 nm, and 660 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

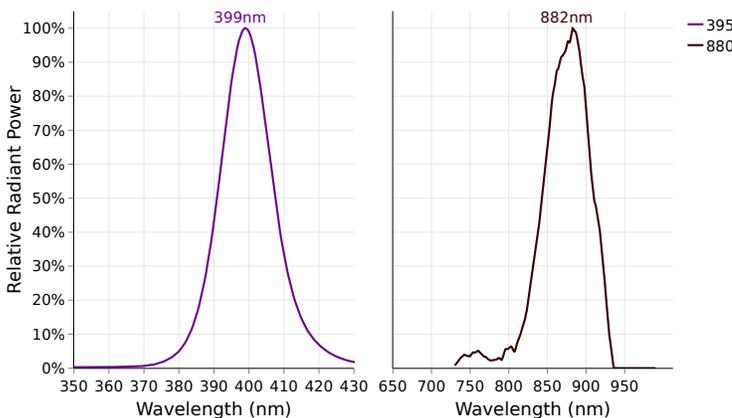

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as fill level inspection, circuit board inspection, food safety inspection, and medical imaging.

The DL2230 Series is available in **395 nm, and 880 nm** configurations.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	880
Group 1	No Photobiological hazard under normal behavioral limitations	470, 520, 625, 660, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	395

Advanced Illumination's lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light's optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: "If it's not dirty, don't clean it." Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

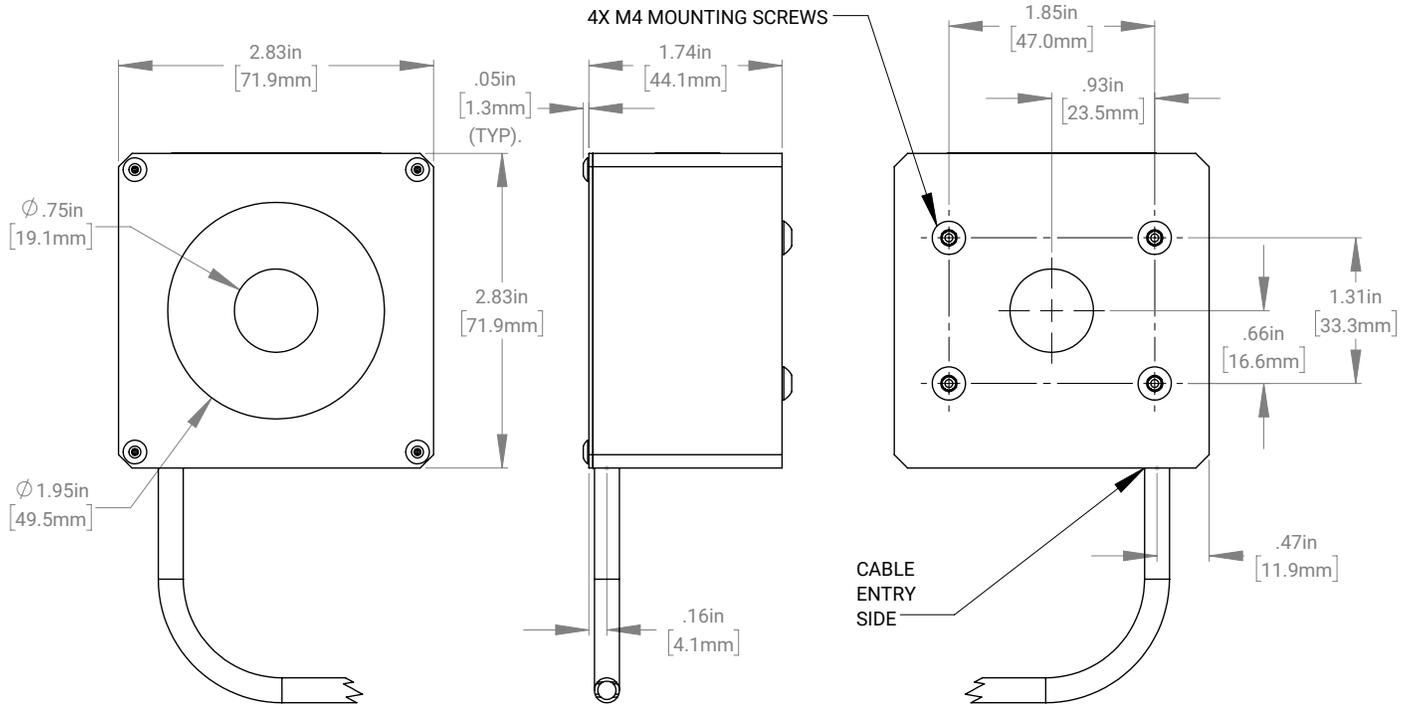

For full installation drawings and complete CAD models of this configuration, please visit the [downloads section of the product webpage](#).

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**

Wavelengths	Configured w/ Voltage Drive (24)	Configured w/ Standard Controller (C1, C5, IC, I3, I3S)
WHI, 395, 470, 520	0.100A	0.100A
625, 660, 880	0.150A	0.080A


Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
	<p><b>DCS Single Output Controller - Compatible with C1 Configurations</b> PN: DCS-100E</p> <p>The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.</p> <p><b>Output Power:</b> 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  <b>Output Current:</b> 4.5A Max Continuous, 15 A Max Pulsed  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-100E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>DCS Triple Output Controller - Compatible with C1 Configurations</b> PN: DCS-103E</p> <p>The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.</p> <p><b>Output Power:</b> 30 W Max Continuous / Output, 180 W Max Pulsed / Output  <b>Output Current:</b> 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  <b>I/Os:</b> 3 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.</p> <p>For more information about our DCS-103E, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Pulsar 320E High Current Controller - Compatible with C5 Configuration</b> PN: Pulsar 320E</p> <p>The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.</p> <p><b>Output Power:</b> 2500 W Max Pulsed / Output  <b>Output Current:</b> 50 A Max Pulsed / Output  <b>I/Os:</b> 2 External Trigger Inputs  <b>Interface:</b> 10/100 Ethernet with Software GUI. SDKs are also available.</p> <p>For more information about our Pulsar 320E, please <a href="#">visit the controller product page</a>.</p>	

**Electrical Information - Continued**


**Control Options - Continued**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous  <b>Output Current:</b> 1.25 A Max Continuous  <b>I/O:</b> 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed  <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent)  <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input  <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation  <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**


**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>5-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	 <p>4-Position Male Connector</p>
2	WHITE	N/A	0-10V Analog Control	Reserved	
3	BLUE	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, or I3s power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
		<p><b>Manual Dimming Accessory for the IC, I3 and I3s</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC or I3/I3S Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>

### Additional Information

#### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

#### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliancy documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

#### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

#### Customer Service


For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

#### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved

# FD2 Series

## High Intensity Back-lit Flat Diffuse Lights Product Datasheet

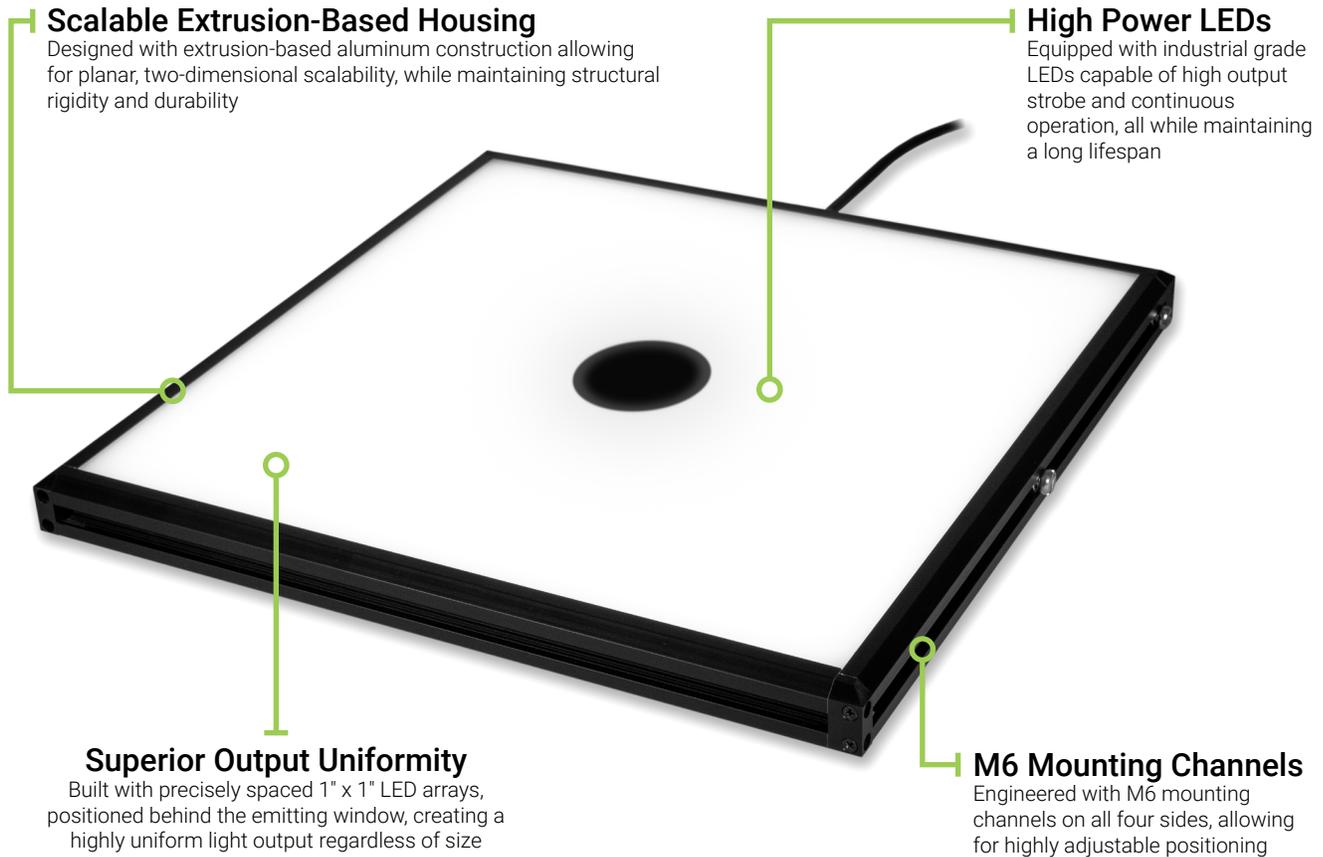

### FD2 Series Description

Built on the same architecture as the popular BL2 backlight, the FD2 planar diffuse light offers the same high-performance and flexible build options, but in a front lighting geometry.

The FD2 light differs from the FX and FX2 planar diffuse lights in that the LEDs are located under the diffuser, rather than positioned in the frame (side-illumination).

The FD2 planar diffuse light can be a substituted for a dome light on flat, and/or topographic surfaces, such as a PCB, depending on the exact features of interest. It has the distinct advantage over a diffuse dome light in that it can be positioned at much longer light working distances.



**High Intensity**



**Scalable Planar Design**



**5 Wavelengths Available**



**Polarization**



**1-2 Week BTO Lead Times Typical**

**General Information**

**General Specifications**

Category	Specification	Detail			
Optical	Available Wavelengths	White, 470 nm, 530 nm, 625 nm, 880 nm			
	Available Lensing	No Lenses			
	Available Light Conditioning	Polarizer			
Electrical	Power Consumption Info	<a href="#">See Power Requirements on Page 8</a>			
	Cable Info	80" -0/+6" Long (2 m -0/+150 mm), 105 °C Rated, Foil Shield w/ Drain			
Mechanical	Sizing Info	Standard	Length	4.36"(110.7mm) to 47.36"(1202.9mm)	<a href="#">See Page 7 for More Details</a>
			Width	4.09"(103.9mm) to 46.09" (1170.7mm)	
			Height	0.94"(23.9mm)	
Mechanical	Weight Info (Standard)	~ 2.46 lbs (~1115 g) per 8x8" Unit			
	Mounting Info	M6 Mounting Nut Channel			
	Material Info	Anodized Aluminum Housing, Acrylic Window, Polycarbonate Strain Relief, PVC Cable Jacket, Steel Black Oxide and Zinc Plated Steel Fasteners			
Thermal	Operating Case Temperatures	25 °C to 60 °C			
	Operating Ambient Temperatures	0 °C to 35 °C			
Certification	Compliance	CE, RoHS, IEC 62471			
	IP Rating	IP50			
	Lumen Maintenance - White Only	L70 (50,000 Hours)			

**General Information - Continued**

**Part Number Key**

Model	Emitting Length (in)	Emitting Width (in)	Peak Wavelength	Connector/Control	Light Conditioning Options	-	Alternative Connector
FD2	XX	YY	XXX	XX	X	-	XXX
FD2	1" Increments from 1" to 46"	1" Increments from 1" to 46"	470 (blue)	C1	Polarizer <sup>2,3</sup>		M12 <sup>1</sup>
			530 (green)	C5			M8 <sup>1</sup>
			625 (red)	IC			
			880 (IR)	I3			
			WHI (white)	I3S			
				I4			
				24			
more information on page	7	7	5	8			10

**Example Part Numbers:**

FD2-0313470C1P  
FD2-0624625IC-M12

<sup>1</sup>Only available with 24, IC, I3, I3S, and I4 configurations

<sup>2</sup>Only available up to 16" x 16"

<sup>3</sup>470nm will reduce the life of the polarizer if selected


**In Stock**

Unavailable

**Lead Times**

Stock products ship within three days.  
Build-to-Order custom products ship within one to two weeks.

**Online Configurator**

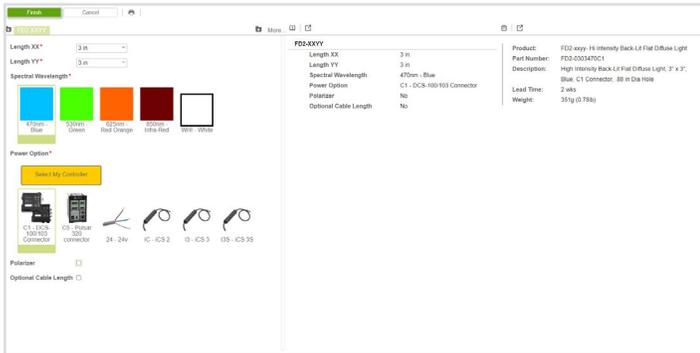


Need a build-to-order custom lighting solution in 2 weeks or less? Advanced Illumination's online configurator helps you tailor our FD2 High Intensity Back-lit Flat Diffuse Lights to your specific needs. For a guided configuration, [visit our online configurator](#).

**Optical Information**


**Intensity Characteristics**

**Intensity Distribution Image at 100 mm Working Distance**

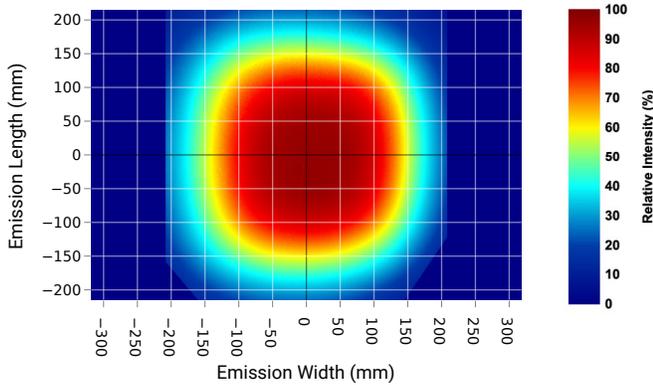


Intensity distribution sample image was taken with a 12-inch x 12-inch white FD2 unit.

**Illuminance vs Working Distance**

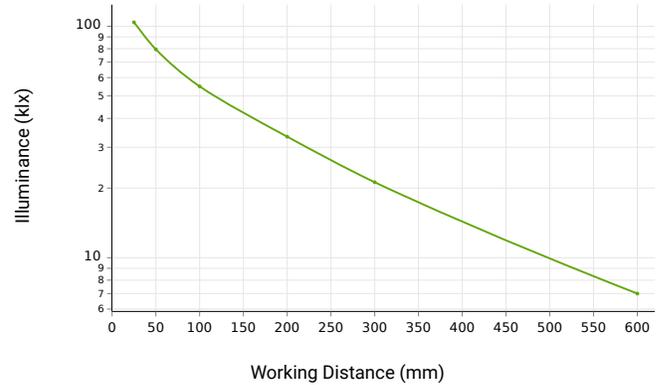

Illuminance data was collected using a 12-inch x 12-inch white FD2 unit.


**FWHM vs Working Distance**

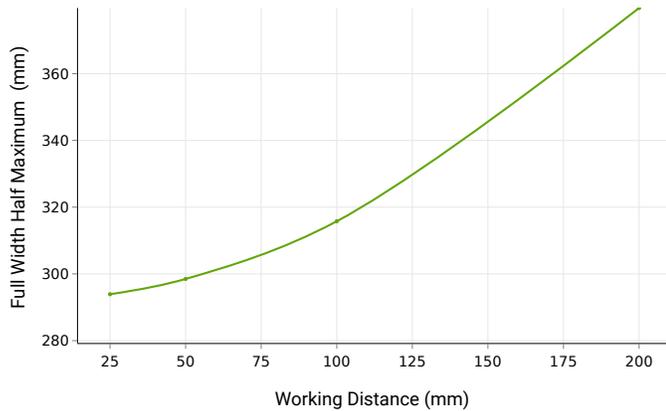

The FD2 provides highly diffuse illumination, ensuring uniformity within +/-10% at working distances greater than or equal to 50mm.

Full Width Half Maximum (FWHM) data collected using a 12-inch x 12-inch white FD2 unit.


**Continuous vs Strobe Intensity**

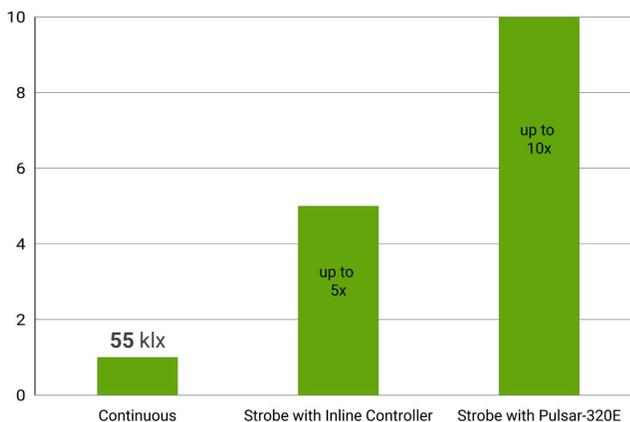

Under continuous operation, a 12-inch x 12-inch white FD2 unit will output an **illuminance of 55 klx** and an **irradiance of 164 W/m<sup>2</sup>** at a 100 mm working distance. For applications that require higher output, the FD2 Series has been engineered to be overdrive strobe capable. When configured with Aii's strobe enabled Inline Controller (I3, and I3s), the FD2 is capable of outputting up-to 5X continuous levels. When configured with a C5 connector, compatible with Aii's Pulsar 320E, a **FD2 can be strobed up-to 10X continuous intensity levels.**

**Optical Information - Continued**

**White Spectral Profile**

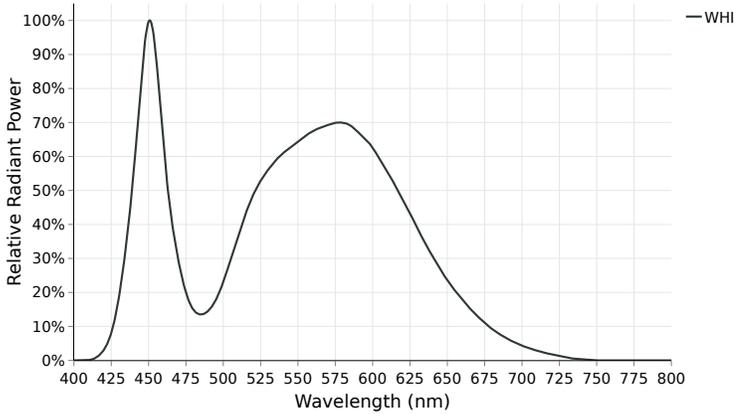


White LED illumination is the most commonly used machine vision lighting configuration. It is often the default choice when specific features of interest do not require color-based highlighting. However, white LEDs can vary in color temperature between different lighting families, which can impact machine vision systems, specifically when matching white light sources.

The FD2 Series white LEDs have a relatively neutral color correlated temperature (CCT) of **5700 K**.

For a more detailed look at the white spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Visible Spectral Profiles**

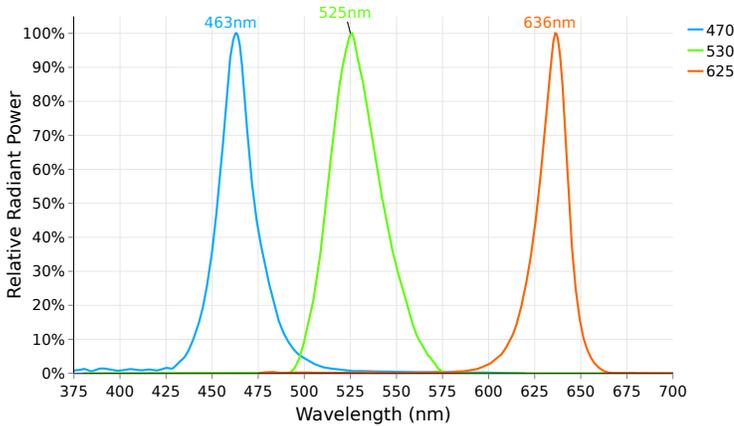


Visible color illumination consists of using wavelengths between 400-700 nm to either create or eliminate contrast on an inspection subject based on differences in a materials color hue. When referring to a color wheel, simply remember the following: like colors reflect and brighten surfaces; conversely, opposing colors absorb and darken surfaces.

The FD2 Series is available in **470 nm, 530 nm, and 625 nm** configurations.

For a more detailed look at the visible color spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

**Non-Visible Spectral Profiles**

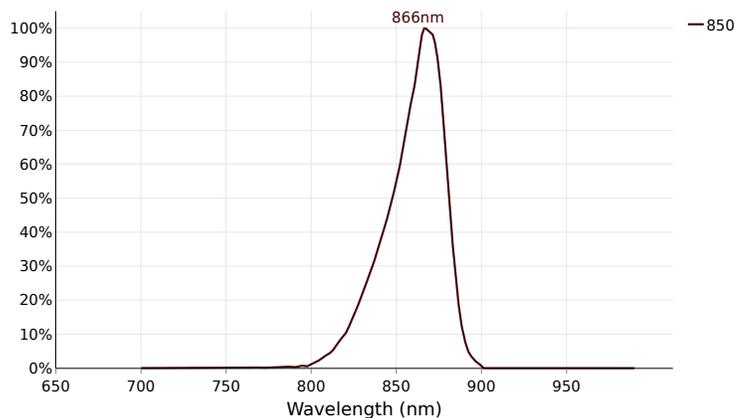

Near-infrared (NIR) imaging is a machine vision technique using longer wavelengths of 700-1000 nm to penetrate specific materials that are otherwise opaque under the visible spectrum. When paired with a NIR camera, a NIR light can be ideal for applications such as circuit board inspection, food safety inspection, and medical imaging.

The FD2 Series is available in an **850 nm** configuration.

For a more detailed look at the NIR spectral data, download the [csv file of the raw spectral values](#) and refer to our [Product Spectra Distribution Charts PDF](#).

Disclaimer: The measurements provided above are for approximations only and may vary depending on the method of measurement and the specific configuration being measured.

**Optical Information - Continued**

**Photobiological Risk Factors**

Group	Description	Affected Wavelengths (nm)
Exempt	No Photobiological Hazard	880
Group 1	No Photobiological hazard under normal behavioral limitations	470, 530, 625, WHI
Group 2	Does not pose a hazard due to aversion response to bright light or thermal discomfort	N/A

Advanced Illumination’s lighting products have been tested and classified to IEC standards by accredited testing services. For more information on photobiological risk factors, please view the following PDF: <https://www.advancedillumination.com/wp-content/uploads/2019/04/IEC-040119.pdf>

**Cleaning Guidelines**



To clean our light’s optics, it is best to only clean when necessary. Dusting is always the first step in cleaning your optics. Wiping a dusty optic is like cleaning it with sandpaper. So always dust with a canned air duster or compressed and filtered air before wiping any optic. If the dusted optic has no visible stains after you dust it, then remember: “If it’s not dirty, don’t clean it.” Avoid wiping optics when possible.


If dusting did not clean the lens or the lens has stains, use only de-ionized water and mild dish soap with a low lint cloth designed for optics to avoid damage to the optic by any harsh chemicals.

Polarizers, beam splitters and collimated films should never be wiped with any type of cloth or solvent, only use the air dusting method to clean these types of optics.

The aluminum housing can be wiped down when dusting is not a sufficient means to thoroughly clean.

**Mechanical Information**

**Installation Drawings**

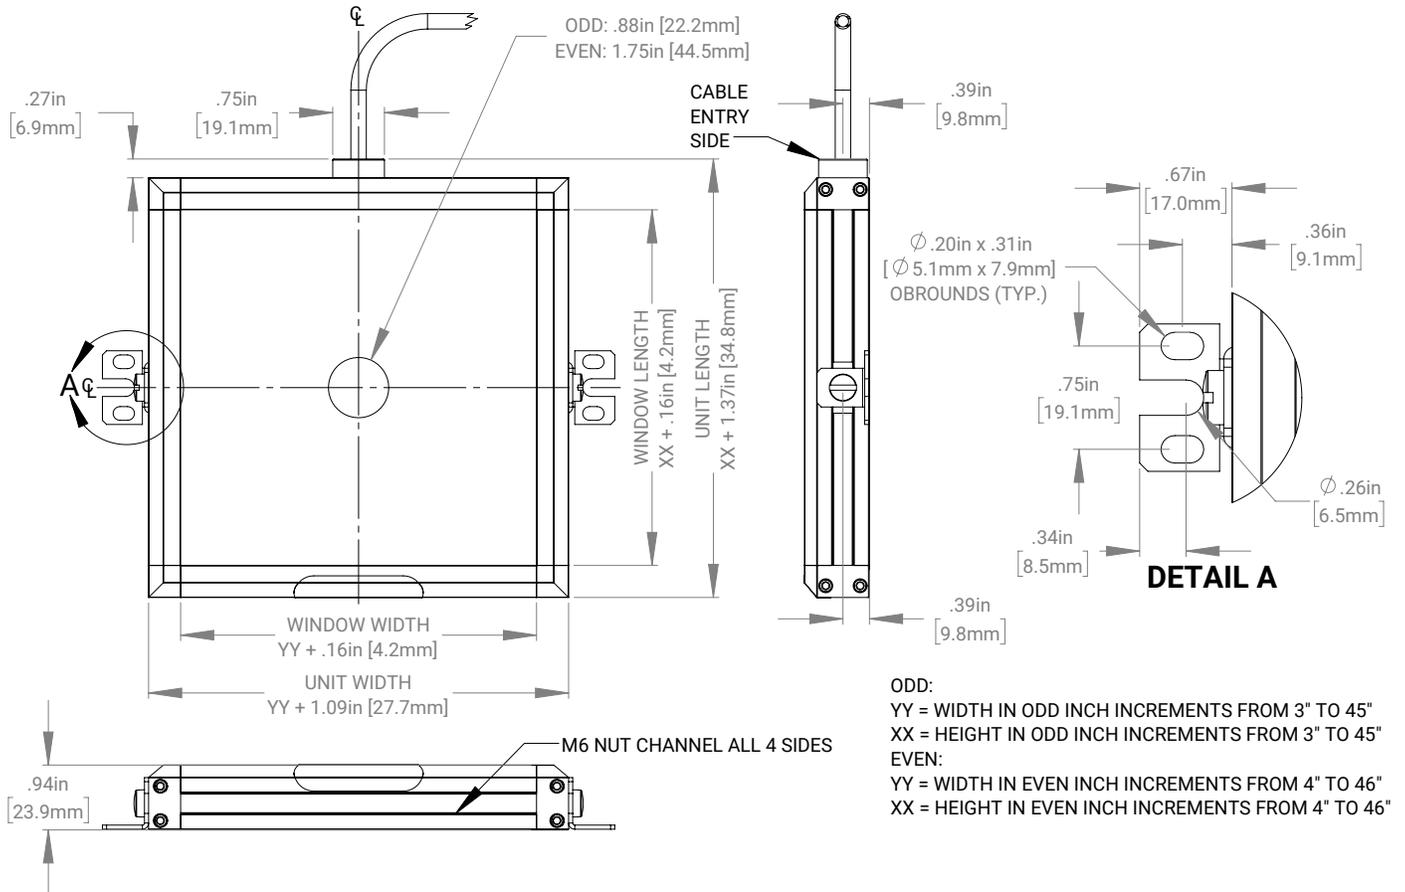

For full installation drawings and complete CAD models of this non-sealed configuration, please visit the [downloads](#) section of the product webpage.

**Sizing Information**

Our high-intensity backlit flat diffuse lights are scalable to your specific sizing requirements. We can manufacture our FD2 flat diffuse lights in 1" increments up to a 736 sq. inch emitting window, from a small 1" x 1" to a large-format 46" x 16" flat diffuse light, all with industry best lead times.

For assistance configuring a flat diffue light to meet your specific needs, please visit our [online configurator](#).

**Electrical Information**

**Power Requirements**

**Current Required for Power Supply Sizing**

Wavelengths (nm)	Configured w/ Standard Controller (IC, I3, I3S, I4, C1, C5) or Voltage Drive (24)
WHI, 470, 530, 625, 850	0.015A per sq. inch

Note: All Advanced Illumination lights and controllers are nominally powered by 24V DC unless otherwise noted. Strobe overdriving with controller based models may require more current and voltage overhead. The values above do not include background current draw from the controller (~100 mA total).

**Control Options**

Controller Image	Controller Details	Connector Image
------------------	--------------------	-----------------



**DCS Single Output Controller - Compatible with C1 Configurations**  
PN: DCS-100E

The DCS-100E is a compact, din-rail mounted general-purpose external controller with one C1 output connector, wired with three channels. Capable of providing single channel control or multi-channel control for RGB compatible lights.

**Output Power:** 90 W Max Continuous, 540 W Max Pulsed (Overdrive Strobe)  
**Output Current:** 4.5A Max Continuous, 15 A Max Pulsed  
**I/Os:** 3 External Trigger Inputs  
**Interface:** 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.

For more information about our DCS-100E, please [visit the controller product page](#).



**DCS Triple Output Controller - Compatible with C1 Configurations**  
PN: DCS-103E

The DCS-103E is a din-rail mounted general-purpose multi-light controller with three C1 output connectors. Capable of driving three lights in sync or asynchronously.

**Output Power:** 30 W Max Continuous / Output, 180 W Max Pulsed / Output  
**Output Current:** 1.5A Max Continuous / Output, 5 A Max Pulsed / Output  
**I/Os:** 3 External Trigger Inputs  
**Interface:** 10/100 Ethernet with Software and browser-based GUIs. SDKs are also available.

For more information about our DCS-103E, please [visit the controller product page](#).



**Pulsar 320E High Current Controller - Compatible with C5 Configuration**  
PN: Pulsar 320E


The Pulsar 320E is a high-power, dual output, pulse-only controller geared for overdriving driving lights at very short flash durations with very high current.

**Output Power:** 2500 W Max Pulsed / Output  
**Output Current:** 50 A Max Pulsed / Output  
**I/Os:** 2 External Trigger Inputs  
**Interface:** 10/100 Ethernet with Software GUI. SDKs are also available.

For more information about our Pulsar 320E, please [visit the controller product page](#).




**Electrical Information - Continued**

Controller Image	Controller Details	Connector Image
	<p><b>Inline Controller - Continuous Only - IC Configurations</b> <i>PN: N/A</i></p> <p>The IC is an inline, cable-mounted continuous-only controller configured/wired directly for the ordered light head.</p> <p><b>Output Power:</b> 25 W Max Continuous <b>Output Current:</b> 1.25 A Max Continuous <b>I/O:</b> 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I3 &amp; I3S Configurations</b> <i>PN: N/A</i></p> <p>The I3 and I3S are inline, cable-mounted continuous and pulse (overdrive strobe) capable controllers configured/wired directly for the ordered light head. When operated in pulsed mode, the I3 is a default-on device on power up, whereas the I3S is default-off, requiring a trigger to illuminate.</p> <p><b>Output Power:</b> 25 W Max Continuous, 125 W Max Pulsed <b>Output Current:</b> 1.25 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our I3/I3S Controller, please <a href="#">visit the controller product page</a>.</p>	
	<p><b>Inline Controller - Strobe and Continuous - I4 Configurations</b> <i>PN: N/A</i></p> <p>The I4 is an inline, cable-mounted continuous and pulse (overdrive strobe) capable controller configured/wired directly for the ordered light head. The I4 can either be operated with a PNP or NPN trigger signal.</p> <p><b>Output Power:</b> 50 W Max Continuous, 150 W Max Pulsed <b>Output Current:</b> 2.1 A Max Continuous, 8 A Max Pulsed (Load Dependent) <b>I/Os:</b> 1 Gated Trigger Signal, 1 0-10 V Analog Dimming Input <b>Interface:</b> Direct Cable (flying leads or optional connector)</p> <p>For more information about our IC Controller please <a href="#">visit the controller product page</a>.</p>	
	<p><b>24V Driver - Continuous Only - 24 Configurations</b> <i>PN: N/A</i></p> <p>24V option allows lights to operate continuous output with 24V connection and no additional controllers.</p> <p><b>Modes:</b> Continuous, can be wired to some 3rd party controllers or external relays for gated operation <b>Interface:</b> Direct cable (flying leads or connector options)</p>	

**Electrical Information - Continued**


**Inline Control Option Wiring Information**

**Standard Flying Lead and Optional M12 Connector Pinout Functions**

Pin (M12)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M12 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	 <b>5-Position Male Connector</b>
2	WHITE	N/A	0-10V Analog Control	Reserved	NPN/Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	PNP/Active High Trigger	PNP/Active High Trigger	
5	GRAY	N/A	N/A	0-10V Analog Control	0-10 V Analog Dimming	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M12 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Optional M8 Connector Pinout Functions**

Pin (M8)	Wire Color	24V Functions	IC Functions	I3/I3S Functions	I4 Functions	M8 Pinout
1	BROWN	24V DC	24V DC	24V DC	24 V DC	 <b>4-Position Male Connector</b>
2	WHITE	N/A	0-10V Analog Control	Reserved	Active Low Trigger	
3	BLUE	DC GND	DC GND	DC GND	DC GND	
4	BLACK	N/A	Gate Low	Active High Trigger	Active High Trigger	

The functions above are only applicable when ordering an 24, IC, I3, I3s, or I4 power configuration with our without an M8 connector. For more wiring information pertaining to strobing and dimming functionality, please download the controller manuals and datasheets.

**Accessories**

Advanced Illumination offers a variety of accessories designed to pair with our lighting and control products. Below you will find a table of accessories which are compatible with many configurations of the FD2 series.

Category	Accessory Image	Accessory Detail
Power Supply		<p><b>24 Volt DC Power Supply</b> PN: PS24-TL</p> <p>This convenient power source is a universal AC input switching power supply with a regulated output DC current. The power supply comes with an LED Power Indicator, tinned leads marked Positive (+) and Negative (-) and 2 WAGO connectors for simplified assembly.</p> <p>For more information about our 24 Volt DC Power Supply, please <a href="#">visit this webpage</a>.</p>
Dimmer		<p><b>Manual Dimming Accessory for the IC, I3, I3s and I4</b> PN: DCS-MP</p> <p>The DCS-MP is a 30-position potentiometer, detented for precision level control and provides repeatable dimming with cable inline controllers. Features include DIN-rail mountable, a flip up cover to prevent accidental adjustments, spring clamp wiring terminal for flying leads or an M12 connector for use with the IC, I3/I3S or I4 Inline Controllers.</p> <p>For more information about our Manual Dimming Accessory please <a href="#">visit this webpage</a>.</p>

**Accessories - Continued**

Category	Accessory Image	Accessory Detail
Dimmer		<p><b>Manual Dimming Accessory for the IC</b> PN: MP-ICS</p> <p>The MP-ICS is a dimmer which is designed for use on lights with the IC Inline Controller. This unit provides for 0 – 100% intensity control. It is NOT COMPATIBLE with LLI37, BLI38, LLI67, and BLI68 "IC" Lights or lights built with the "24v controller" option.</p> <p>For more information about our Manual Dimming Accessory, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Single Light Power Cable - C1 Configuration</b> PN: LC-XX-S</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female 7 pin locking connector (C1) and can be purchased in 3 - 15-meter lengths.</p> <p>For more information about our DCS-100E/103E Extension Cable, Single Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>DCS-100E/103E Extension Cable, Dual Light Power Cable - C1 Configuration</b> PN: LC-XX-Y</p> <p>This extension cable was designed for applications requiring two identical lights to be powered through a single controller. These Y cables feature a single male and dual female 7 pin locking connectors (C1) and can be purchased in 3 - 15-meter lengths. See attached spec sheet for compatible light configuration.</p> <p>For more information about our DCS-100E/103E Extension Cable, Split Output, please <a href="#">visit this webpage</a>.</p>
Extension Cable		<p><b>Pulsar 320E Extension Cable - C5 Configuration</b> PN: LC-XX-S-C5</p> <p>This extension cable was designed for applications requiring power cables longer than the standard 2 meters provided with Ai lights. This single light cable features a single male and single female Pulsar 320 connector (C5) and can be purchased in 3 - 15 meter lengths.</p> <p>For more information about our Pulsar 320E Extension Cable, please <a href="#">visit this webpage</a>.</p>
Adaptor Cable		<p><b>Cognex Gen2 Inline Controller Adaptor Cable</b> PN: AD-I3-CGX2</p> <p>This cable adaptor is for connecting I3/I3S configured lights with Cognex Gen2 Cameras, and comes with a male to female M12 connectors.</p> <p>For more information about our Cognex Gen2 Inline Controller Adaptor Cable, please <a href="#">visit this webpage</a>.</p>
Filters		<p><b>Camera Lens Band Pass Filters</b> PN: BPXXX-YYY</p> <p>Eliminating all but a narrow band of light (+/- 40nm) centered on the specified wavelength, band pass filters are used to enhance colors, or to stop unwanted ambient light from reaching the camera. Filtering can replace existing shrouds, simplifying the physical set up of an inspection site. Ai offers 635nm and 660nm band pass filters to fit several different lens sizes.</p> <p>For more information about our Camera Lens Band Pass Filters, please <a href="#">visit this webpage</a>.</p>
Mounting Brackets		<p><b>Mounting Brackets</b> PN: LB</p> <p>Fastens to the M6 mounting channel for simplified mounting. Included in product purchase.</p> <p>For more information about our Mounting Brackets, please <a href="#">visit this webpage</a>.</p>

### Additional Information

#### Warranty

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of FIVE YEARS from the original date of purchase. Should a defect develop during this period, customers may return the complete product, freight prepaid, to one of Ai's distributors or to the Ai factory. All product warranty returns require a Return Merchandise Authorization (RMA) number which is obtained from Customer Service. The RMA number must be clearly marked on the outside of the package. Ai will inspect the unit, and if a defect is found will, at our option, repair or replace the product without charge. Ai disclaims liability for any implied warranties, including implied warranties of "merchantability" and "fitness for a specific purpose." For products under warranty that have since been discontinued, Ai will make an effort to replace with equivalent parts; for circumstances that do not allow for equivalent replacement, Ai reserves the right to repair or replace these products with an updated version. Ai cannot be held responsible for the unauthorized or inappropriate use of its products. Any unauthorized repair or modifications will result in a voided warranty. No Liability for Consequential Damages: In no event shall Ai be liable for any consequential, special, incidental, or indirect damages of any kind arising from the sale or use of the products.

#### Compliance

Our lighting products are designed and tested to meet CE, RoHS, and IEC standards. As a global ISO 9001 certified company, we understand the importance of compliance and perform accelerated testing on every product before shipment. For more information on our compliance standards, please see our compliancy documentation here: <https://www.advancedillumination.com/services/compliance-statements/>

#### Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

#### Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm ET or send an email to [orders@advancedillumination.com](mailto:orders@advancedillumination.com).

#### Company Information

Advanced Illumination  
440 State Garage Road, Rochester, VT 05767  
Phone: +1 (802) 767 3830  
Fax: +1 (802) 767 2636  
Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)  
Web: [advancedillumination.com](http://advancedillumination.com)  
© 2023 Advanced illumination Inc. All rights reserved



Expandable

### Product Highlights

- Uniform illumination
- Expandable vertically and horizontally in 1" increments from 3" x 3" to 24" x 24"
- Available with different hole diameters ranging from 1/4" to 3" in 1/4" increments
- Low heat output
- Compact design for inspecting reflective objects




### General Specifications

	Color	24v Current	All Other Controls
Electrical Specifications	625	N/A	0.062 A Max per 1 inches
	455, 530, WHI	N/A	0.103 A Max per 1 inches
	850	N/A	0.05 A Max per 1 inches
Normal Operating Temperature	0 - 60°C		
Weight (g)	4" X 4" unit - 553.4g (19.52oz)		
Standard Cable Information	Up to 2 meters (80") long - 105°C rated PVC jacket, foil shield with drain.		
Photobiological Risk Factor IEC 62471	<b>Exempt Applicable Wavelengths:</b> 850 <b>Group 1 (Low-Risk) Applicable Wavelengths:</b> 455, 530, 625, WHI		
Compliance			
IP Rating	IP50		
Lumen Maintenance	L70 = 50,000 hours		

# FX 2D Expandable Series

## Mechanical Specifications

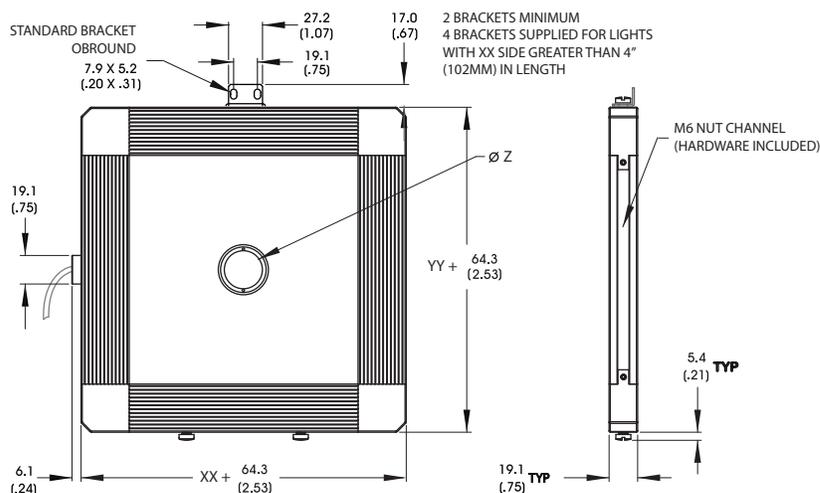

YY = WIDTH IN 1" INCREMENTS FROM 3" to 24"  
 XX = HEIGHT IN 1" INCREMENTS FROM 3" to 24"  
 Z = HOLE DIAMETER IN 1/4" INCREMENTS FROM 1/4" to 3"

DIMENSIONS ARE IN MILLIMETERS (INCHES)

## Part Number Key

Model	Height	Width (Cable Side)	Hole Diameter	—	Spectral Wavelength	Connector/Control	—	Alternative Connector
<b>FX</b>	<b>XX</b>	<b>YY</b>	<b>Z</b>	<b>—</b>	<b>XXX</b>	<b>XX</b>	<b>—</b>	<b>XXX</b>
FX	in 1" increments from 3" to 24"	in 1" increments from 3" to 24"	in 1/4" increments from 1/4" to 3" (refer to chart)		(royal blue) 455 (green) 530 (red) 625 (infra-red) 850 (white) WHI	C1 C5 IC I3 I3S		M12 <sup>1</sup>
Ex: FX0312-455C1 FX0608B-625IC FX1208F-WHII3-M12						<sup>1</sup> Available with IC, I3 and I3S		

Hole Diameter Chart

Hole Size	P/N
1/4"	FXXXXYYA
1/2"	FXXXXYYB
3/4"	FXXXXYYC
1"	FXXXXYY
1 1/4"	FXXXXYYE
1 1/2"	FXXXXYYF
1 3/4"	FXXXXYYG
2"	FXXXXYYH
2 1/4"	FXXXXYYI
2 1/2"	FXXXXYYJ
2 3/4"	FXXXXYYK
3"	FXXXXYYL

For standard 1" diameter, omit letter "D" from part number.

**Stock Product:** *shipped within 3 days*    **Build to Order:** *shipped within two weeks*  
 FX0808-625IC


## Connector | Control Options

C1 Connector	C5 Connector	ICS 2 (IC)	ICS 3 (I3)	ICS 3S (I3S)
For use with: <b>DCS Series Controllers</b>	For use with: <b>Pulsar 320 Strobe Controller.</b>	Continous in-line controller  Powered with: <b>24V power supply</b>	Combination strobe/continous in-line controller  Powered with: <b>24V power supply</b>	Default-OFF strobe/continous in-line controller  Powered with: <b>24V power supply</b>

# FX 2D Expandable Series


## Optical Performance

### Intensity Distribution

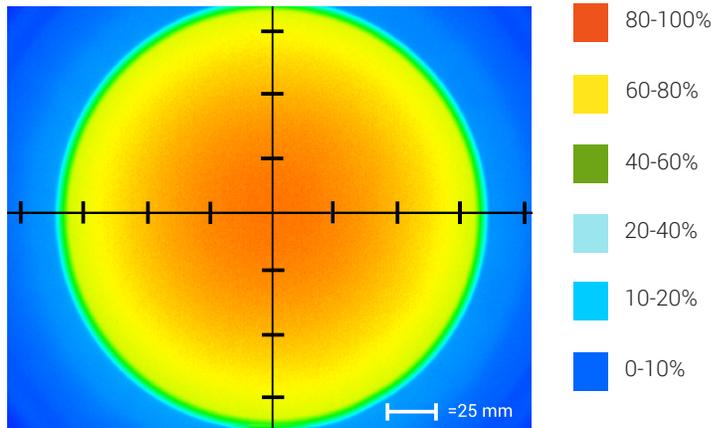

Optical measurement taken using FX0808-WHII3 @ 200mm

### Area of Illuminance & Intensity

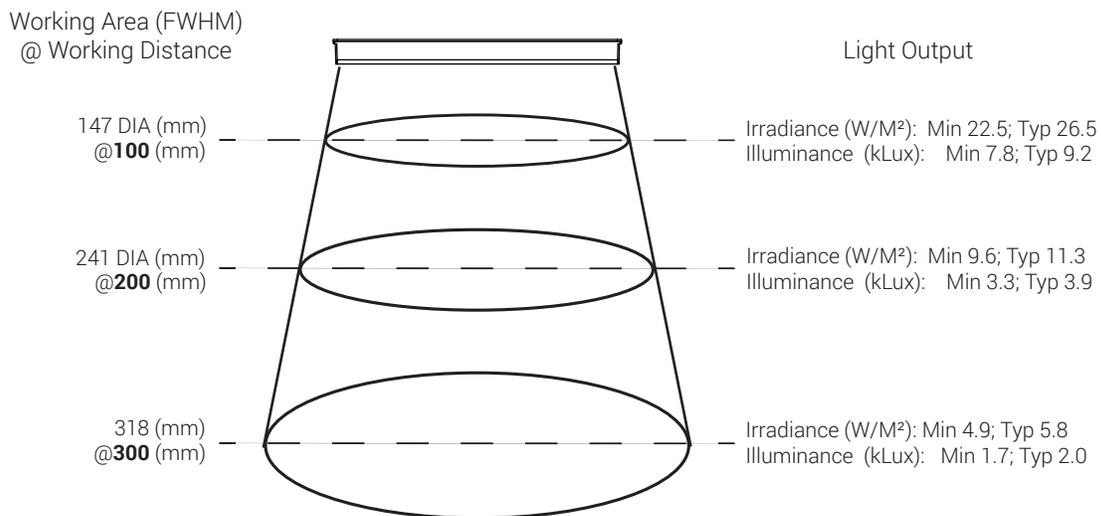

## Operation and Wiring


### ICS 2 (IC)

Pin (M12)	Function	Wire Color
1	+24 VDC	Brown
2	0-10 VDC Analog Control	White
3	GND	Blue
4	GLO	Black
5	N/A	Gray

### ICS 3 (I3 and I3S)

Pin (M12)	Function	Wire Color
1	+24 VDC	Brown
2	Reserved	White
3	GND	Blue
4	PNP/Active High Trigger	Black
5	0-10 VDC Analog Control	Gray

### Optional M12 Pinout

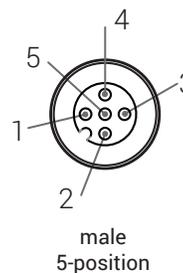

# FX 2D Expandable Series

## Warranty Information

Every Advanced illumination, Inc. (Ai) product is thoroughly inspected and tested before leaving the factory. Products are warranted to be free of defects in workmanship and materials for a period of two years from the original date of purchase. Should a defect develop during this period, please contact Ai Customer Service or your Ai distributor for a Return Merchandise Authorization (RMA), and return the complete product, freight prepaid, to Ai. If a defect is found, Ai will - at our discretion - repair or replace the product without charge. Ai claims no liability for any implied warranties, including "merchantability" and "fitness for a specific purpose."

## Electromagnetic Compatibility

This product was tested and complies with the regulatory requirements and limits for electromagnetic compatibility (EMC) as stated in the product specifications. These requirements and limits are designed to provide reasonable protection against harmful interference only when the product is operated in its intended industrial electromagnetic environment. To minimize the potential for electromagnetic interference or unacceptable performance degradation, install and use this product in strict accordance with the instructions in the product documentation.

## Customer Service

For information on existing orders, or to make an order adjustment, contact us Monday through Friday 8:00 am to 5:00 pm, EST or send an email to [orders@advill.com](mailto:orders@advill.com).

## Company Information

### **Advanced Illumination**

440 State Garage Road, Rochester VT. 05767

Phone: 802.767.3830

Fax: 802.767.3831

Email: [info@advancedillumination.com](mailto:info@advancedillumination.com)

Web: [advancedillumination.com](http://advancedillumination.com)

© 2015 Advanced Illumination Inc. All rights reserved