


Control valve(3/2 way, 5/3 way)


ZM3 Series

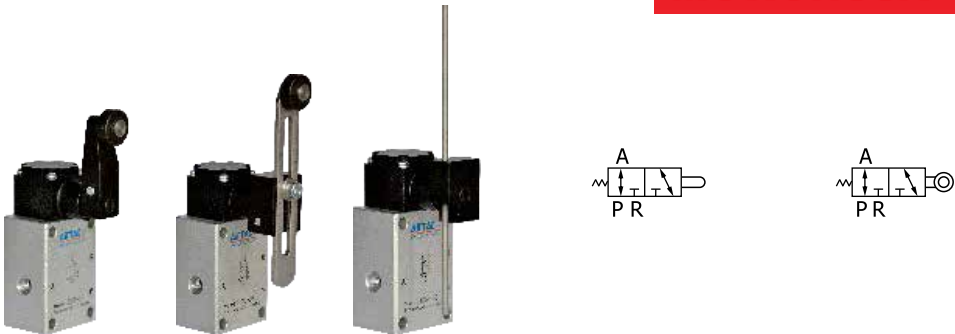

Ordering code

ZM3 R 06 W T

1 2 3 4 5


① Valve's type	② Model	③ Port size	④ Extreme angle of opening and closing of control head	⑤ Thread type
ZM3: ZM type 3/2 Way	R: Roller type J: Adjustable roller type P: Contact pin adjustable roller type	06: 1/8"	Blank: Standard type W: Large angle type 	T: NPT

Specification

Model	ZM3R	ZM3J	ZM3P
Operating	External control direct acting type		
Fluid	Air (to be filtered by 40 μm filter element)		
Pressure range	-15~145psi(-0.1~1.0MPa)		
Proof pressure	215psi(1.5MPa)		
Temperature	-20~70℃		
Valve type	3/2 Way		
Orifice size	6.0mm ² (Cv=0.34)		
Port size [Note1]	1/8"		
Lubrication [Note2]	Not required		
Material body	Aluminum alloy		

[Note1] NPT thread is available.
 [Note2] Once lubricated air is used, continue with same medium to optimize valve life span.
 It is suggested to use ISO VG32 lubricant or the oil with the same grade.

Flow chart

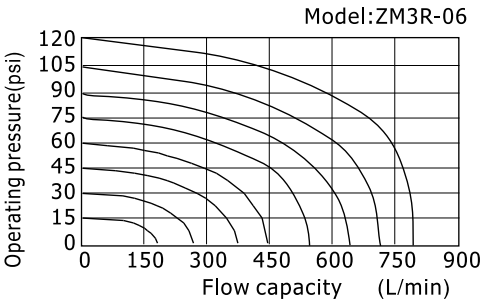

Control valve(3/2 way, 5/3 way)


AIRTAC

ZM3 Series


MOTIONUSA

Product feature


1. The activity direction could be changed(Only adapt to standard type, large angle type unavailable)

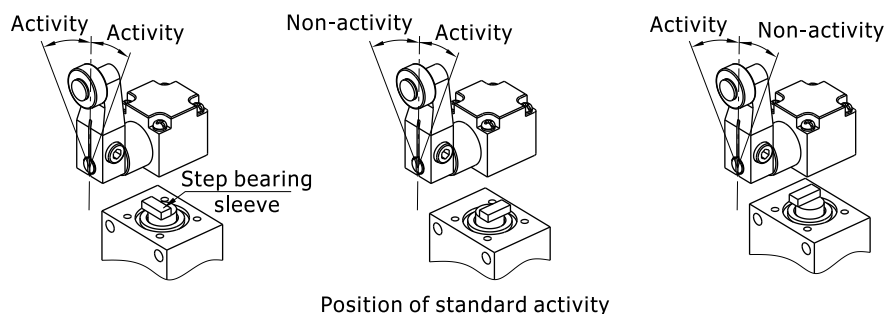


2. The rolling wheel could be installed at the inside of leverage

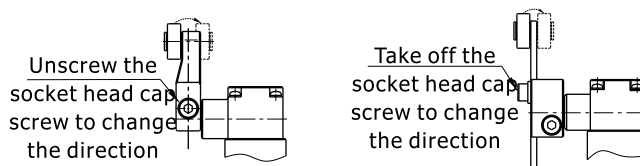



3. Installation position of leverage could be changed

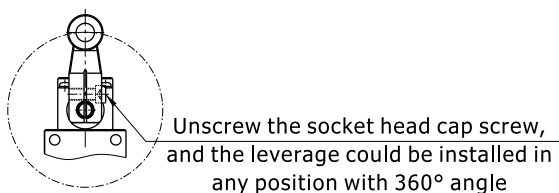

4. Direction of head part could be changed



5. Length of contact pin could be changed

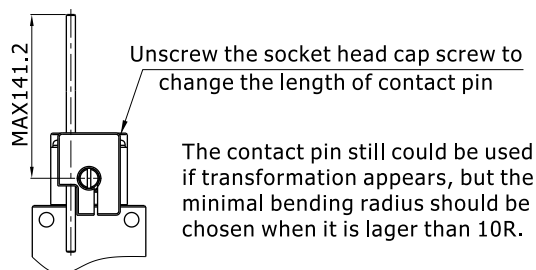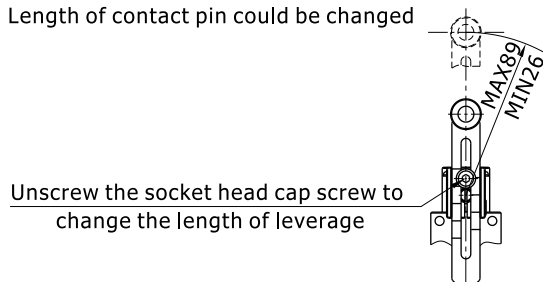

Control valve(3/2 way, 5/3 way)

AIRTAC


ZM3 Series

MOTIONUSA

Dimensions


ZM3R

[Unit: mm]

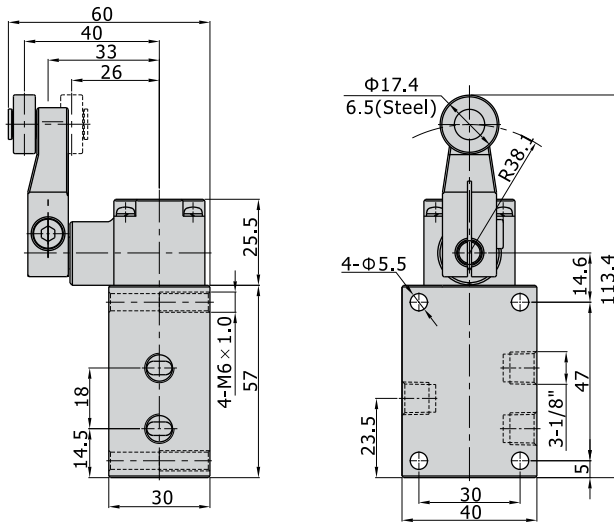

Model\Item	F.O.F	P.T.	O.T.	T.T.
ZM3R06	20N	20°	30°	50°
ZM3R06-W	20N	25°	50°	75°


ZM3J

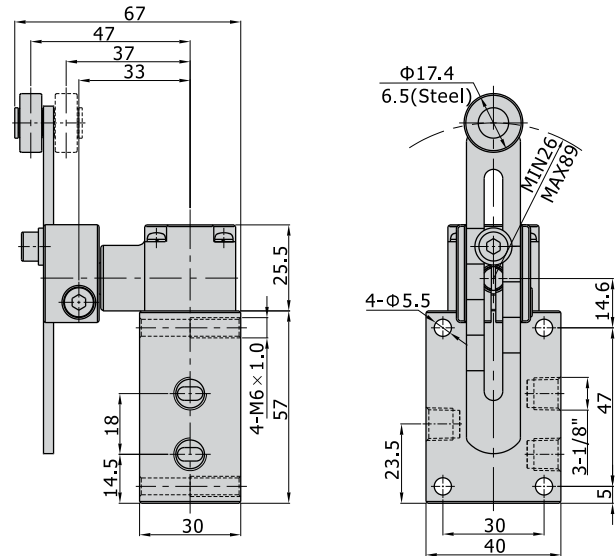

Model\Item	F.O.F [Note1]	P.T.	O.T.	T.T.
ZM3J06	20N	20°	30°	50°
ZM3J06-W	20N	25°	50°	75°

[Note1] When the length of leverage is 38.1mm


ZM3P

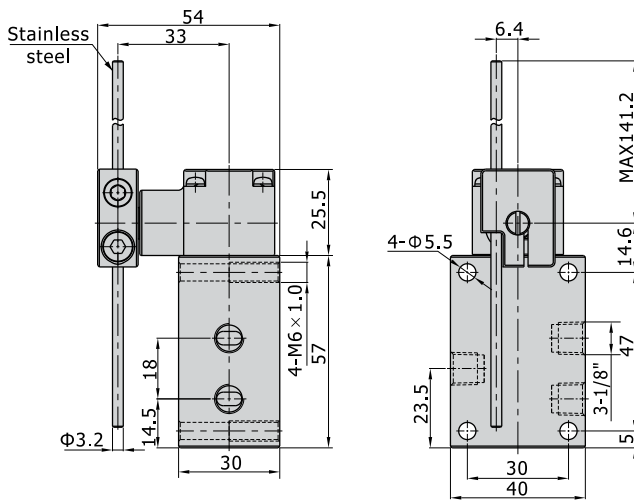

Model\Item	F.O.F [Note1]	P.T.	O.T.	T.T.
ZM3P06	2.3N	20°	30°	50°
ZM3P06-W	2.3N	25°	50°	75°

[Note1] When the length of leverage is 141.2mm

Description of symbol

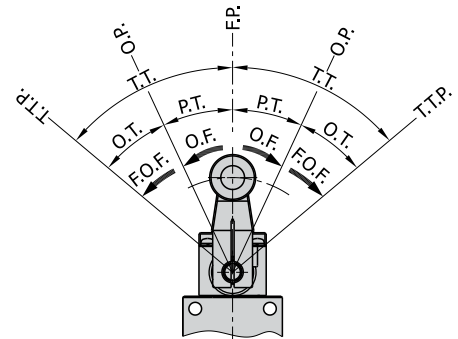

- F.P. Free position: the position of control head when no external force applied;
- O.P. Activity position: the position when the control head is applied with external force and the valve is switched;
- T.T.P. Extreme position of actuation: position of control head when it is pushed until end position;
- O.F. Actuation power: when driving from free position to actuation position, the operation power applied on control head;
- F.O.F. Extreme actuation power: when driving from free position to extreme actuation position, the operation power applied on control head;
- P.T. Free route: movement distance or rotation angle from free position of control head to actuation position;
- O.T. Actuation route: movement distance or rotation angle from actuation position of control head to extreme actuation position;
- T.T. Total route: movement distance or rotation angle from free position of control head to extreme actuation position;