



HEIDENHAIN



TNC 320

The Compact Contouring
Control for Milling, Drilling
and Boring Machines



This brochure describes the functions and specifications of the TNC 320 with NC software 771851-04.

Contents

The TNC 320...

Where can it be used?	Compact and versatile – The right control for milling, drilling and boring machines	4
What does it look like?	Well designed and user friendly – The TNC 320 in dialog with the user – The functional user interface	6
What can it do?	Minimize setup and non-machining time – The TNC 320 makes setup easy – The TNC 320 manages and measures	10
	Economical and productive – Swivel head or rotary table controlled by the TNC – Machining any contour slots with trochoidal milling	14
How is it programmed?	Programming, editing, testing – The TNC 320 opens endless possibilities – Graphic support in any situation	16
	Programming in the workshop – Straightforward function keys for complex contours – Programming contours unconventionally – Field-proven cycles for recurring operations – Reusing programmed contour elements – Fast availability of all information	18
	Open for communication – The TNC 320 understands CAD files – Fast data transfer with the TNC – Display any data formats on the TNC screen – The TNC 320 programming station	24
Are there any accessories?	Workpiece measurement – Setup, presetting and measuring with touch trigger probes	29
	Tool measurement – Measuring length, radius and wear right on the machine	30
	Positioning with the electronic handwheel – Delicate axis traverse	31
... At a glance	Overview – User functions – Options – Accessories – Specifications	32

Compact and versatile

–The right control for milling, drilling and boring machines

For more than 35 years, TNC controls from HEIDENHAIN have been proving themselves in daily use on milling, drilling and boring machines, as well as machining centers. During this period the controls have been continuously developed with the needs of the machine operator always placed foremost.

You'll also find this principle realized in the TNC 320: workshop-oriented programmability with graphic support, many field-proven cycles and an operational design that you are familiar with from other HEIDENHAIN controls.

Shop-oriented programming

You program conventional milling and drilling operations yourself at the machine, in **Klartext**—the dialog-guided, workshop-oriented programming language from HEIDENHAIN. The TNC 320 provides you with optimum support with practical prompts, questions and graphical aids.

Standard operations and even complex applications are on call as a large variety of real-world machining cycles or coordinate transformations.

Easy to operate

For simple work, such as face milling, you need not write a program on the TNC 320. It is just as easy to operate the machine manually by pressing the axis keys or—for maximum sensitivity—using an electronic handwheel.

Offline program creation

The TNC 320 can be programmed remotely just as well. Its Fast Ethernet interface guarantees very short transfer times, even of long programs.



The TNC 320 is compact and easy to read.

The TNC 320 is a compact but versatile contouring control for three servo axes and servo spindle. Two further servo axes are an option. Thanks to its flexible operation—workshop-oriented programmability with HEIDENHAIN Klartext or offline programming—and its scope of features, it is especially suited for use on universal milling, drilling and boring machines for the following:

- Series and single-part production
- Tool making
- Machine building
- Research and development
- Prototypes and pilot plants
- Repair departments
- Training and education facilities

It also offers the applicable features both necessary and helpful for:

Universal milling machines



- Free contour programming
- Milling cycles for complex contours
- Fast presetting with HEIDENHAIN touch probes

Drilling and boring machines

- Cycles for drilling, boring and spindle alignment
- Cycles for Cartesian and polar point patterns
- Drilling oblique holes

Machines with parallel secondary axes

- Compensating movement in the secondary axes U, V, W through the principal axes X, Y, Z
- Defining the principal and secondary axes in the NC program makes it possible to run programs on different machine configurations
- Including movements of the parallel axis in the position display of the associated principal axis (sum display)

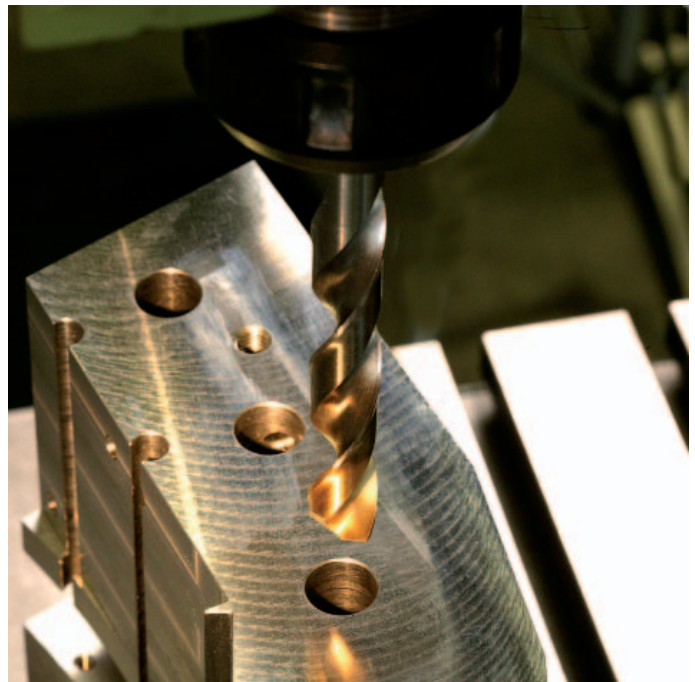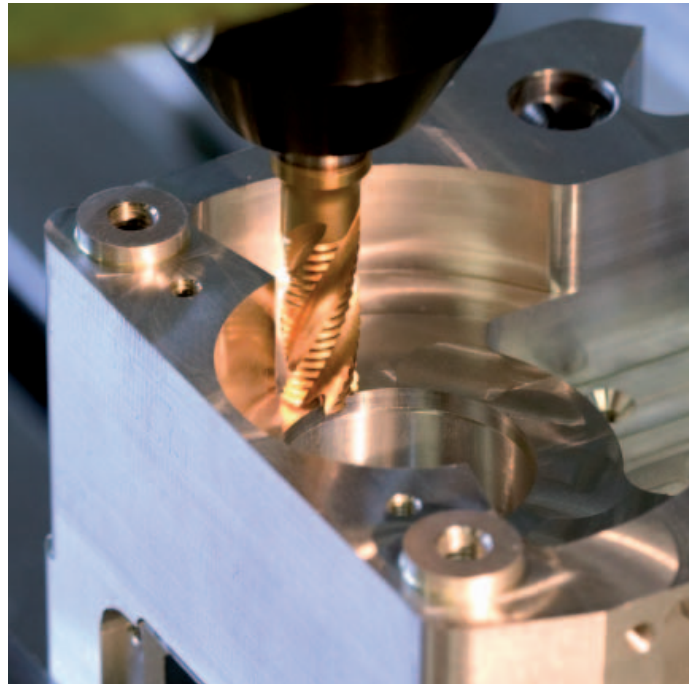

Well designed and user friendly

– The TNC 320 in dialog with the user

The screen


The 15-inch TFT color flat-panel display shows a clear overview of all relevant information for programming, operating and inspecting the machine tool and control, such as program blocks, comments and error messages. More information is provided through graphic support during program entry, test run and actual machining.

The selectable “split screen” display shows the part program blocks in one half of the screen and the graphics or the status display in the other half.

During the course of the program, status displays will always offer information to keep you up to date on tool position, the current program, active cycles and coordinate transformations, and other data. The TNC 320 even shows the current machining time.

The operating panel

As with all TNCs from HEIDENHAIN, the operating panel is oriented to the programming process. The well-thought-out arrangement of keys in a clear division into **function groups**, i.e. programming modes, machining modes, management/ TNC functions and navigation, supports you during program input. Simple key assignment, easily understandable symbols or abbreviations clearly indicate each key's function. You use the **override potentiometers** to make delicate adjustments of feed-rate and spindle speed.

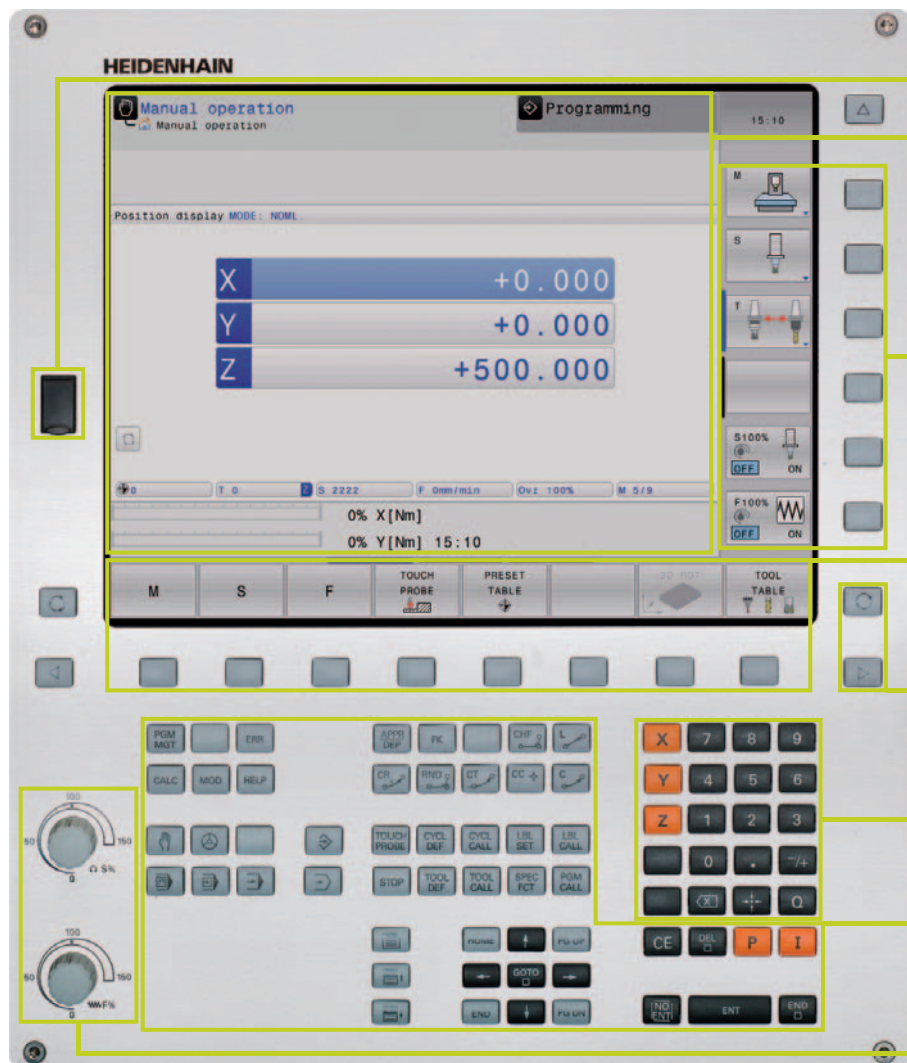

USB port for additional data storage or pointing devices

The screen content includes two operating modes, the program, graphics and the machine status

PLC function keys (soft keys) for machine functions

Self-explanatory **function keys** (soft keys) for NC programming

Keys for **screen management** (screen layout), operating mode and switching between soft-key rows

Axis-selection keys and **numeric keypad**

Function keys for programming modes, machine modes, TNC functions, management and navigation

Override potentiometers for feed rate and spindle speed

Ergonomic and elegant, state-of-the-art and field-proven—HEIDENHAIN controls in a new design. Judge for yourself:

Durable

The high-quality stainless steel design of the TNC 320 features a special protective coating and is therefore highly resistant to soiling and wear.

Smooth

The rectangular, slightly rounded keys are pleasant to the touch and reliable in operation. Their inscriptions do not wear off, even under extreme workshop conditions.

Versatile

Soft keys both for the programming and the machine functions always show only the currently available selections.

Sensitive

With the handy control knobs you can individually adjust the feed-rate and spindle speed.

Communicative

The fast USB 2.0 interface lets you connect storage media or pointing devices to the operating panel simply and directly.

Flexible

The optional machine operating panel features easily exchangeable snap-on keys.

Reliable

The elevated key bed of the machine operating panel (on versions with separate keyboard) prevents accidental actuation. LEDs serve for status display of each key by clearly indicating the active machine functions.



Well designed and user friendly

–The functional user interface

The combination of the straightforward and ergonomically designed keyboard and the well-designed screen layout are the essence of reliable and fatigue-free operation—principles that HEIDENHAIN has always represented. However, the TNC 320 also offers a number of features that make working with the control even easier and user-friendlier than ever.



Attractive view

The user interface of the TNC 320 has a modern appearance, with slightly rounded forms, color gradients and a homogeneously designed font. The individual screen areas are clearly distinguished and the operating modes are also indicated by their respective symbols.

To better distinguish between the priority of error messages, the TNC 320 displays them in color-coded categories. A color-coded warning triangle is also displayed.

Fast function overview

With **smartSelect** you enjoy dialog guidance for quick and easy selection of functions that up to now were accessible only through the soft-key structure. As soon as you open smartSelect, it displays a tree structure with all subordinate functions that can be defined in the control's current condition. Moreover, in the right part of the smartSelect window, the TNC displays the integrated help. With the cursor or a mouse click, you immediately access detailed information on the respective function. Also, smartSelect enables you to define fixed cycles, touch probe cycles, special functions (SPEC FCT), and quickly access the parameter programming.

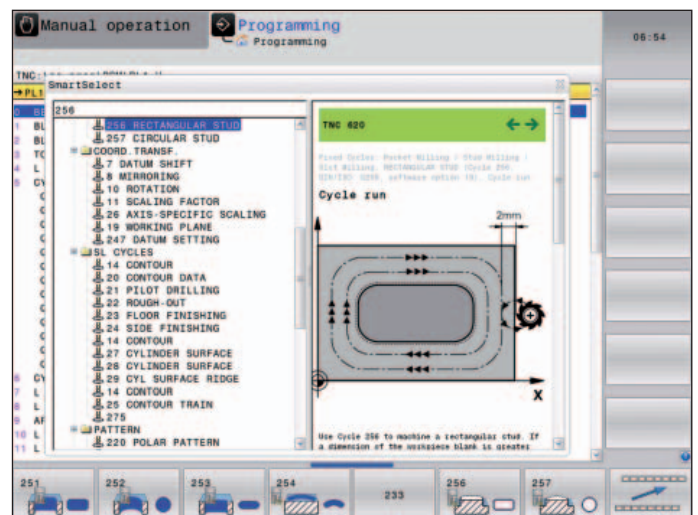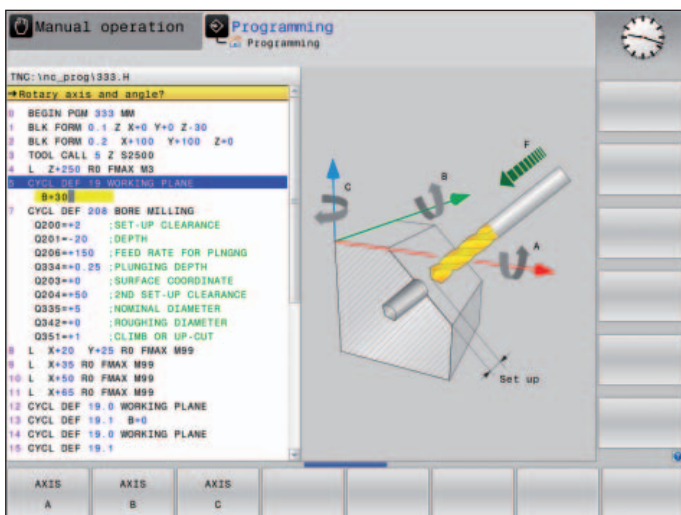

Color-structured programs

The content of a program line can be quite comprehensive: line number, program function, input values, comment. To help you always find your way even in complex programs, the individual program elements on the TNC 320 are shown in different colors. The color syntax highlighting improves your overview when editing NC programs. It enables you to see at a glance, for example, where the editable input values are.

Uniform table editor



Regardless of which table you are editing—whether the tool table, datum table or pallet table—the appearance, function and operation of the table editor are always the same.

Info line

In the info line, the TNC 320 shows the respective submode condition and helps you to orient yourself. The function is comparable with the history function in web browsers.

MOD function

The additional mode MOD offers a myriad of possible settings in a standardized layout regardless of the operating mode.

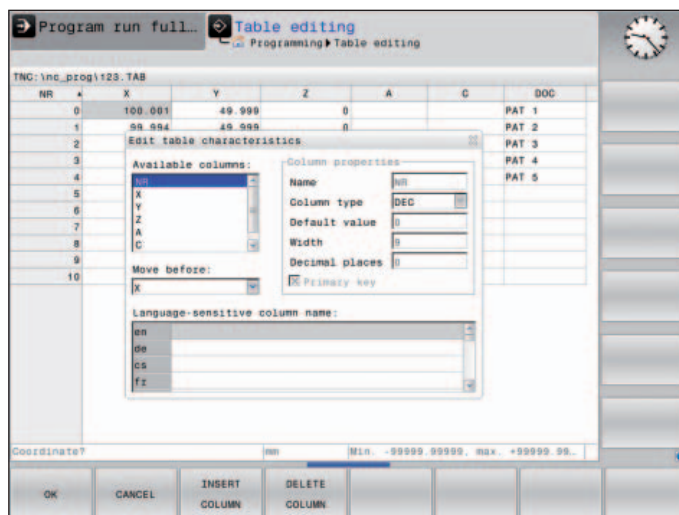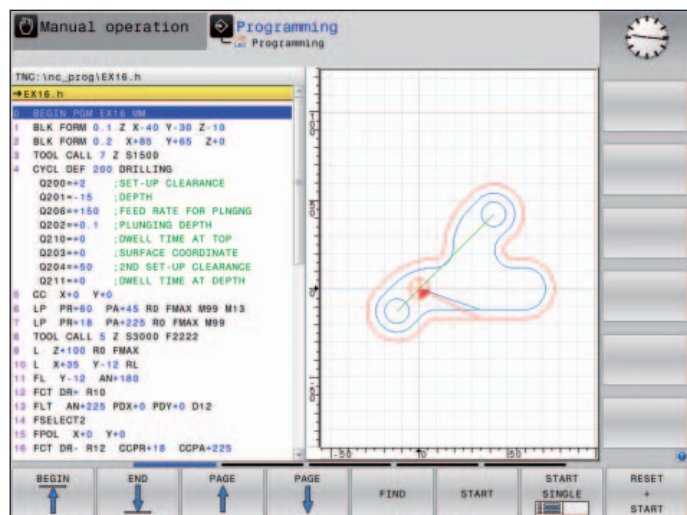

Minimize setup and non-machining time

– The TNC 320 makes setup easy

Before you can begin machining, you must first clamp the workpiece and set up the machine, find the position and orient the workpiece on the machine, and set the workpiece reference point. Without support from the control this is often a time-consuming procedure, but it is indispensable. After all, any error directly reduces the machining accuracy. Particularly in small and medium-sized production runs, as well as for very large workpieces, setup times become quite a significant factor.

Here the TNC 320 shows its strengths: With its practice-oriented setup features it supports the operator and helps to reduce non-machining time. Together with the **touch probes**, the TNC 320 offers various probing features for aligning, presetting, and measuring the workpieces.

Delicate manual traverse

For setup, you can use the axis-direction keys to move the machine axes manually or in incremental jog. A simpler and more reliable way, however, is to use the electronic handwheels from HEIDENHAIN (see page 31). With the handwheels you are always close to the action, enjoy a close-up view of the setup process, and can control the infeed responsively and precisely.

Adapting the probing velocity

Frequently, the workpiece has to be probed at hidden locations or in cramped spaces. In this case, the standard probing feed rate is usually too fast. In such situations you can use the feed rate potentiometer to change the feed rate during probing. What is special about this option is that it does not influence accuracy.




Workpiece alignment

With HEIDENHAIN touch probes (see page 29) and the probing functions of the TNC 320, you can forgo any tedious manual alignment of the workpiece:

- Clamp the workpiece in any position.
- The touch probe determines the actual workpiece position by probing a surface, two holes, or two studs.
- The TNC 320 compensates the misalignment with a “basic rotation,” which means that in the NC program the part is rotated by the measured misalignment, or the rotary table itself is turned to correct the misalignment.

Compensating for workpiece misalignment

by rotating the coordinate system or turning the table

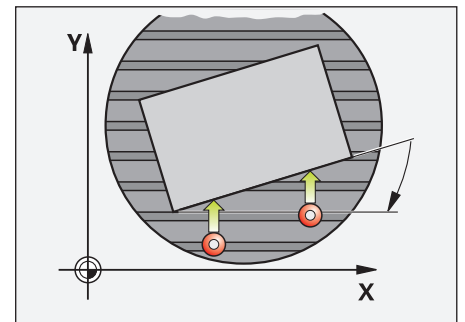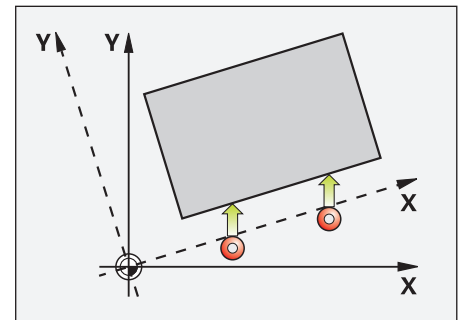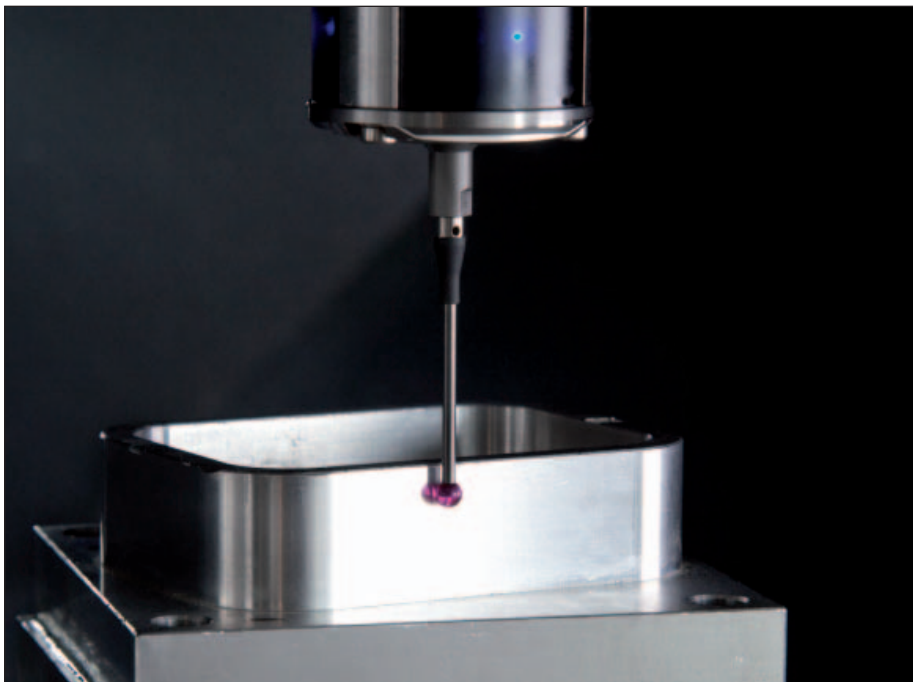

Setting reference points



You can use a reference point to assign a defined value in the TNC display to any workpiece position. Finding this point quickly and reliably reduces nonproductive time and increases machining accuracy.

The TNC 320 features probing cycles for automatic setting of reference points.

- Once found, you can save these points
- in the reference-point manager,
 - in a datum table, or
 - by directly setting the displayed value.

Setting a reference point

at a corner, for example, or in the center of a circular stud

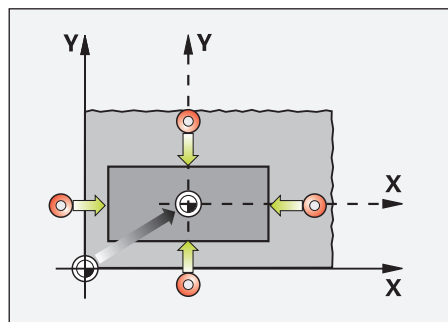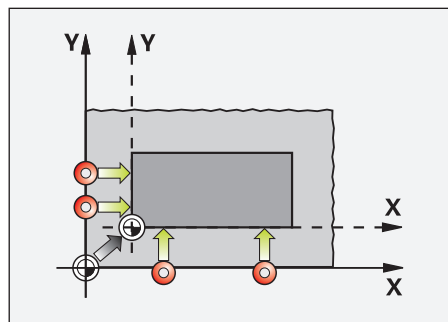

Reference-point management with the preset table

The reference-point manager makes flexible machining, shorter setup times and increased productivity possible. In other words, it makes it much easier to set up the machine.


In the reference-point manager you can save **any number of reference points** and assign an individual basic rotation to each one. To permanently save fixed reference points in the machine working space, you can also provide individual lines with write protection.

There are three ways to save reference points rapidly in the reference-point manager:

- In the Manual mode by soft key
- By using the probing functions
- With the automatic probing cycles

Saving datums

In datum tables, you can save positions or values given measured with respect to the workpiece. Datums are always relative to the active reference point.

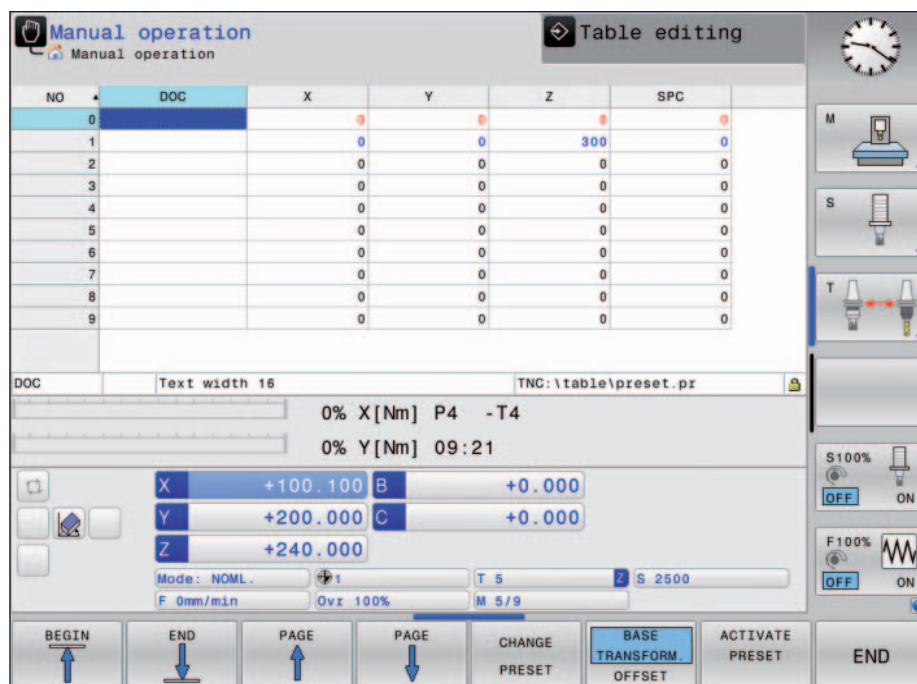

Minimize setup and non-machining time



–The TNC 320 manages and measures

The difference in requirements placed on the classical machine for tool and mold-making and machining centers is becoming ever less distinct. Of course, the TNC 320 is capable of controlling automated manufacturing processes. It has the functions required to manage and measure tools and inspect the machining process. It helps you reduce non-cutting time, increase productivity and improve production quality.


Inspecting workpieces for proper machining and dimensional accuracy

The TNC 320 features a number of measuring cycles for checking the geometry of the machined workpieces. For the measuring cycles you insert a touch probe from HEIDENHAIN (see page 29) into the spindle in place of a tool. This enables you to


- recognize a workpiece and call the appropriate part program,
- check whether all machining operations were conducted correctly,
- determine infeeds for finishing,
- detect and compensate tool wear,
- ascertain the machining error trend.

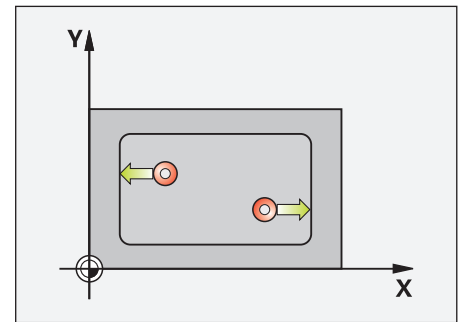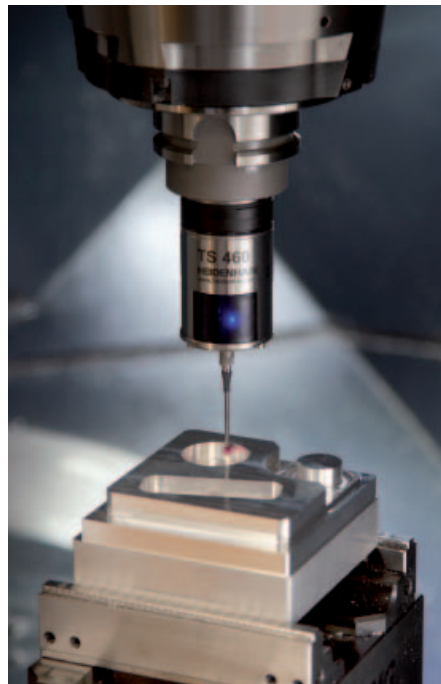

Length measurement

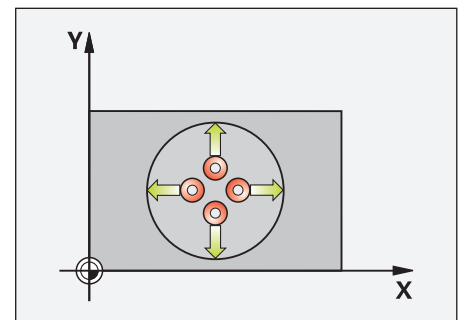


Circular pocket/hole measurement

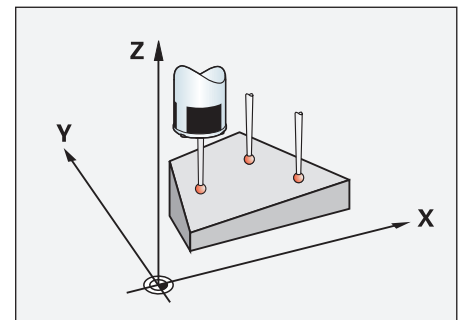


Measuring the angle of a plane

Tool measurement and automatic compensation of tool data


Together with the TT and TL touch probes (see page 30), the TNC 320 can automatically measure tools while they are in the machine. The TNC 320 saves the ascertained values of tool length and radius in the central tool file. By inspecting the tool during machining you can quickly and directly measure wear or breakage to prevent scrap or rework. If the measured deviations lie outside the tolerances, or if the monitored life of the tool is exceeded, the TNC 320 locks the tool and automatically inserts a replacement tool.

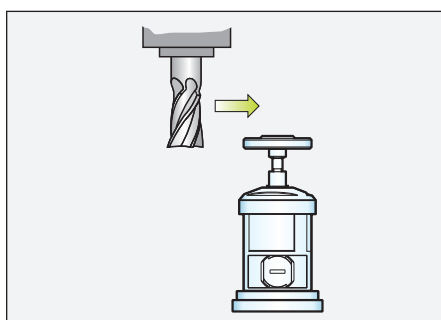

Measuring the tool radius

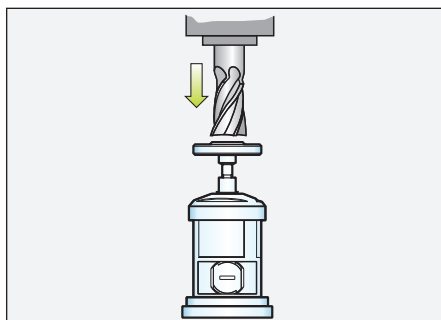

Measuring the tool length

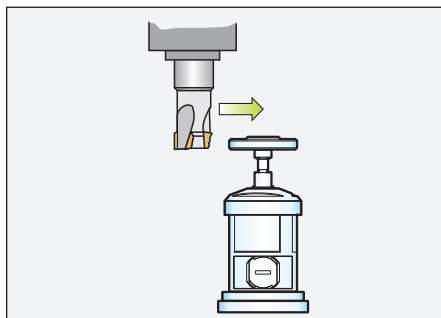

Measuring tool wear



Tool management

For machining centers with automatic tool changers, the TNC 320 offers a central tool management function for any number of tools. The tool management is a freely configurable file and can therefore be optimally fitted to your needs. You can even have the TNC 320 manage your tool names. The control prepares the next tool change while the current tool is still cutting. This significantly reduces the non-cutting time required for changing tools.

With the optionally available expanded tool management you can also graphically prepare and display any data.*

* The machine must be prepared by the machine tool builder for this function.



Economical and productive

– Swivel head or rotary table controlled by the TNC (option)

Many 5-axis operations that at first glance may seem very complex can be reduced to conventional 2-D movements that are simply tilted about one or more rotary axes or wrapped onto a cylindrical surface. The TNC supports you with application-oriented functions to help you write and edit such programs quickly and simply without a CAD/CAM system.

Tilting the working plane*

Programs for contours and holes on inclined surfaces are often very complex and require time-consuming computing and programming work. Here the TNC 320 helps you to save a great deal of programming time.

You program the machining operation as usual in the working plane, for example in X/Y. The machine then runs the program in a plane that has been tilted by one or more rotary axes with respect to the main plane.

The PLANE feature makes it easy to define a tilted working plane: You can specify tilted working planes in seven different ways, depending on the information on the workpiece drawing. Clearly arranged support graphics assist you during input.

You can also use the PLANE function to define the positioning behavior for tilting so that there are no unpleasant surprises when the program is run. The settings for defining the positioning behavior are identical for all PLANE functions, making everything that much easier.

Cylinder surface machining*

With the TNC 320 it is quite easy to program contours (which consist of straight lines and arcs) on cylindrical surfaces using rotary and tilting tables: You simply program the contour in a plane as if the cylinder surface were unrolled. You enter a contour in two dimensions—as if in a plane—and the TNC 320 then calculates and machines the corresponding cylindrical contour.

The TNC 320 features four cycles for cylindrical surface machining:

- Slot milling (the slot width is the same as the tool diameter)
- Guide-groove milling (the slot width is greater than the tool diameter)
- Ridge milling
- Outside contour milling

* The machine must be prepared by the machine tool builder for this function.



– Machining any contour slots with trochoidal milling


The benefit of trochoidal milling is its ultra-efficient machining of slots of all kinds. The roughing process is a circular motion superimposed on a forward linear motion. This procedure is referred to as trochoidal milling. It is used particularly for milling high-strength or hardened materials, where the high loads placed on the tool and machine usually only permit small infeeds.

With trochoidal milling, on the other hand, large cutting depths are possible since the prevailing cutting conditions do not increase the wear and tear on the tool. On the contrary, the entire length of a hob's cutting edges can be used. This enables you to achieve a greater chip volume per tooth. Circular plunging into the material places less radial force on the tool. This reduces the mechanical load on the machine and prevents vibration.

The slot to be machined is described in a contour subprogram as a contour train. You define the dimensions of the slot and the cutting data in a separate cycle. Any residual material remaining can then easily be removed with a subsequent finishing cut.

The benefits include:

- Engagement of the entire cutter length
- Higher chip volume
- Relief from mechanical load on the machine
- Less vibration
- Integrated finishing of the side wall

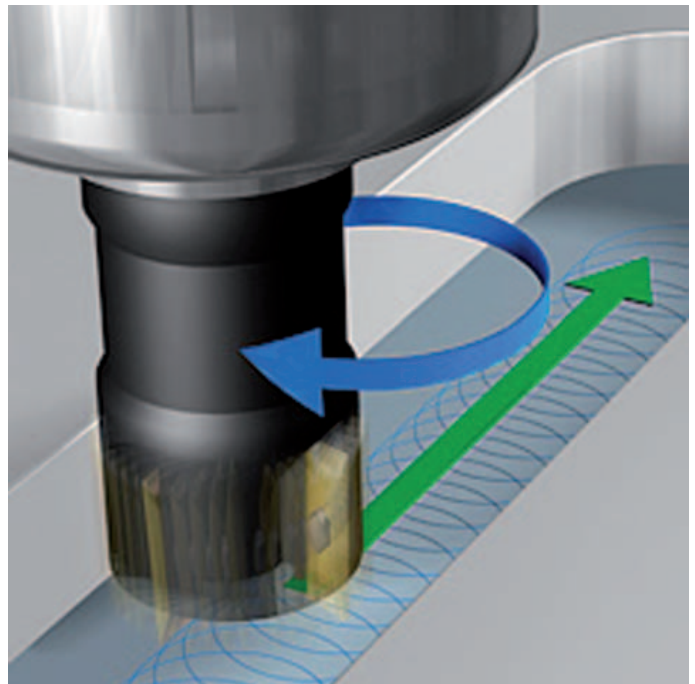

Programming, editing, testing

–The TNC 320 opens endless possibilities

The TNC 320 is just as universal in application as it is flexible in machining and programming.

Positioning with Manual Data Input

You can start working with the TNC 320 even before writing a complete part program. Simply machine a part step by step—switching as you want between manual operation and automatic positioning.

Programming at the machine


HEIDENHAIN controls are workshop oriented, which means that they were conceived for programming right at the machine. With **Klartext conversational programming** you can forget about memorizing G codes. Instead you use dedicated keys and soft keys to program line segments, circular arcs and cycles. You initiate a HEIDENHAIN Klartext dialog with a keystroke and the TNC immediately begins to support you actively in your work. Unambiguous questions and prompts help you enter all the required information.

If you are used to **G-code programming**, however, the TNC 320 is still the right control for you. It displays soft-key rows dedicated to the most important G-code commands so that you can enter programs with G-codes directly. Or you connect a USB keyboard and use it to write the program.

Whether Klartext prompts, dialog guidance, programming steps or soft keys, all texts are available in numerous languages.

Creating programs offline

The TNC 320 is also well equipped for offline programming. Through its interfaces it can be integrated into networks and connected with programming stations or other data storage devices. The TNC 320 can also run programs that were written in DIN/ISO format.

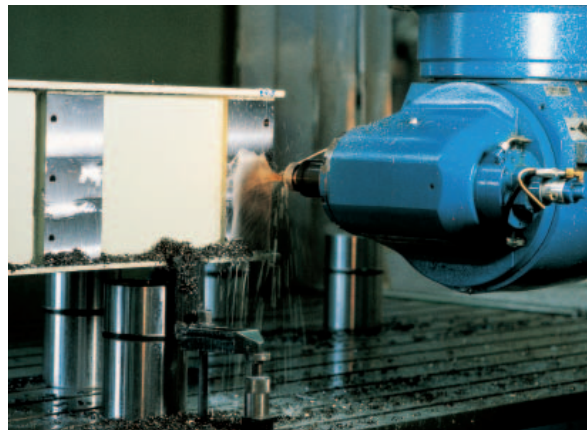

– Graphic support in any situation

Programming graphics

The two-dimensional programming graphics give you additional security: while you are programming, the TNC 320 draws every entered traverse command on the screen. You can select among the plan view, side view and front view.

Test graphics

To play it safe before running a program, the TNC 320 can graphically simulate the machining of the workpiece. It can present different views of the simulation:




- In a plan view with different shades of depth
- In three projections
- In a solid model, 3-D view

Details can be displayed in magnification. In addition, the TNC 320 indicates the calculated machining time in hours, minutes and seconds.

In the 3-D view, you can display the programmed tool-center path in three dimensions. With the powerful zoom function you can also see the finest details. You should especially use the 3-D line graphics to inspect programs created offline for irregularities before machining, in order to avoid undesirable traces of the machining process on the workpiece, e.g. when points are output incorrectly by the postprocessor. The TNC also features a measuring function in the 3-D view. You can position the mouse pointer anywhere in the graphic to see the coordinates.

Program-run graphics

The program-run graphics display the workpiece in real time to show you the current stage of machining. Direct workpiece observation is usually impossible due to the coolant and the safety enclosure. During workpiece machining, you can switch at any time between various operating modes, for example to create programs. You then use free moments for a keystroke to take a glance at the progress of workpiece machining.

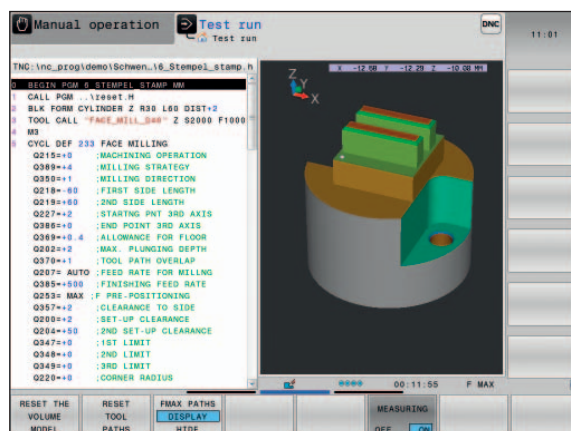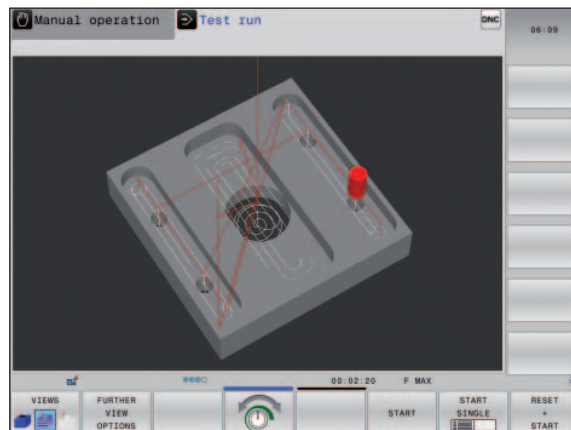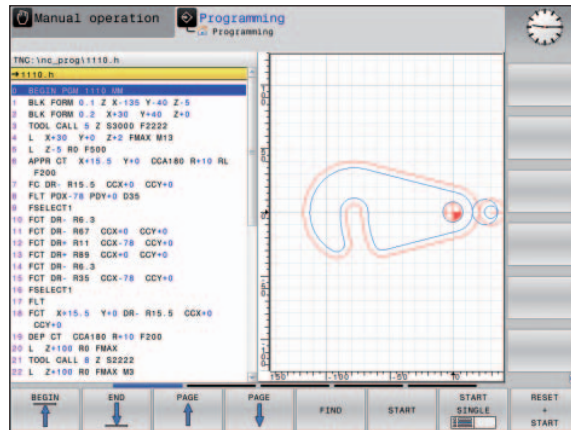

Programming in the workshop

– Straightforward function keys for complex contours

Programming 2-D contours

Two-dimensional contours are the bread and butter of the modern machine shop. Here the TNC 320 offers a variety of possibilities.

Programming with path function keys


If contours are dimensioned for NC, which means that the end points are specified in Cartesian or polar coordinates, then you can program them directly with the path function keys.

Straight and circular contour elements


To program a line segment, for example, simply press the key for linear traverse. The TNC 320 asks in Klartext format for all information required for a complete programming block, such as target coordinates, feed rate, cutter radius compensation and machine functions. Appropriate path function keys for circular movement, chamfers, and corner rounding simplify your programming. To avoid surface blemishes during approach to or

departure from the contour, it must be approached smoothly—that is, tangentially. You simply specify the starting or end point of the contour and the approaching or departing radius of the cutter edge—the control does the rest for you.


The TNC 320 can look ahead over a radius-compensated contour for up to 99 blocks to watch for back cutting and avoid contour damage such as can occur when roughing a contour with a large tool.

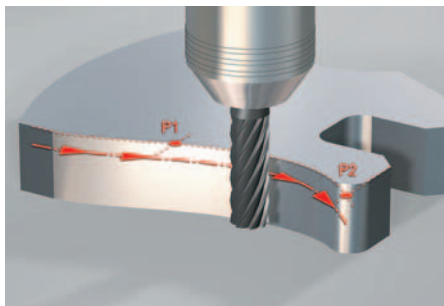


Circular path with smooth, (tangential) connection with the preceding contour element, defined by end point

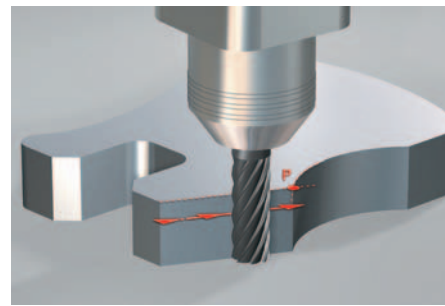


Straight line defined by its end point

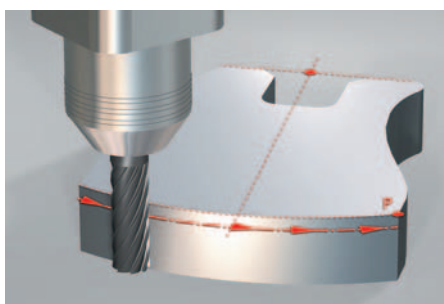

Circular path defined by its center point, end point, and rotational direction

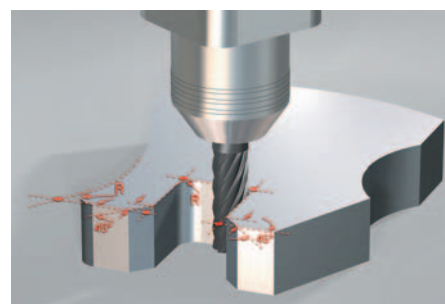

Corner rounding: circular path with smooth (tangential) connection on both sides, defined by radius and corner point

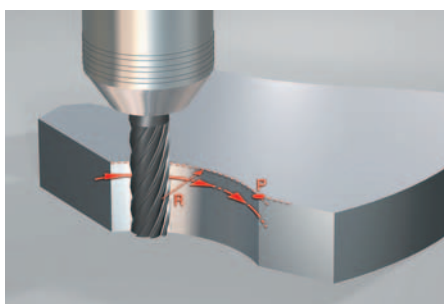

Circular path defined by its radius, end point and rotational direction






Chamfer: defined by the corner point and the chamfer length

– Programming contours unconventionally

FK free contour programming

Not all workpieces are dimensioned for conventional NC programming. Thanks to FK, the control's free contour programming feature, in such cases you simply type in the known data—without first having to convert or calculate your data! It does not matter if individual contour elements are not completely defined as long as the complete contour has been. If the given data result in more than one mathematical solution, the helpful TNC 320 programming graphics show you the possible variants for your selection.

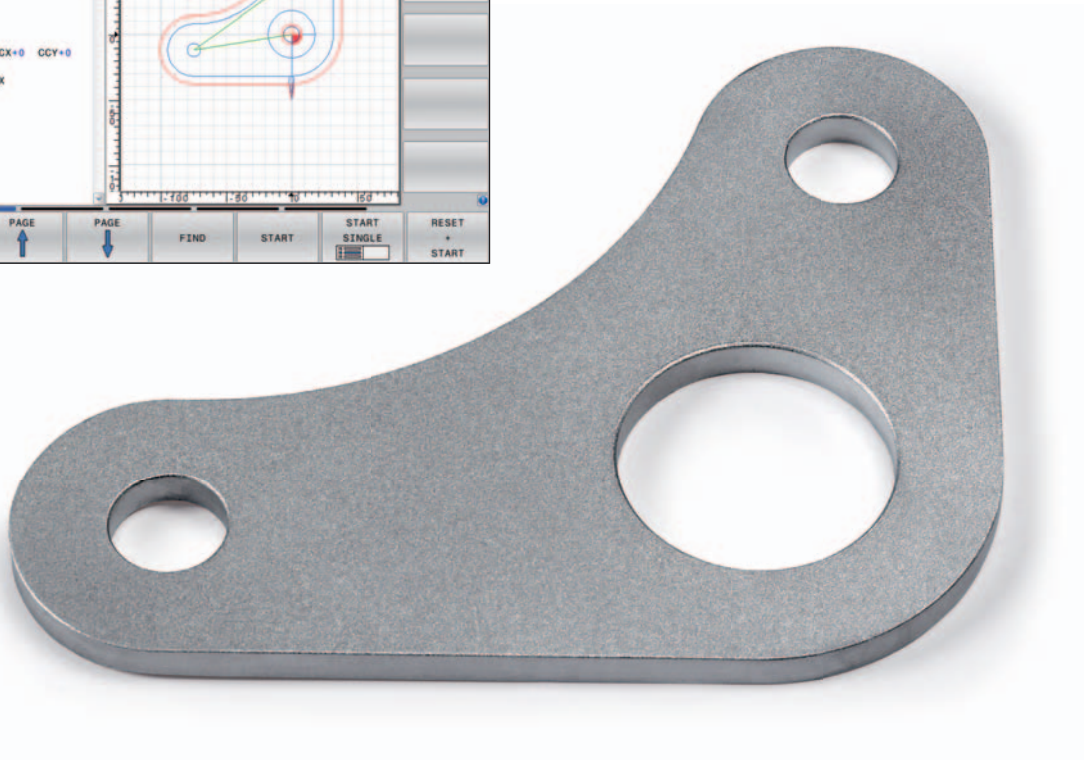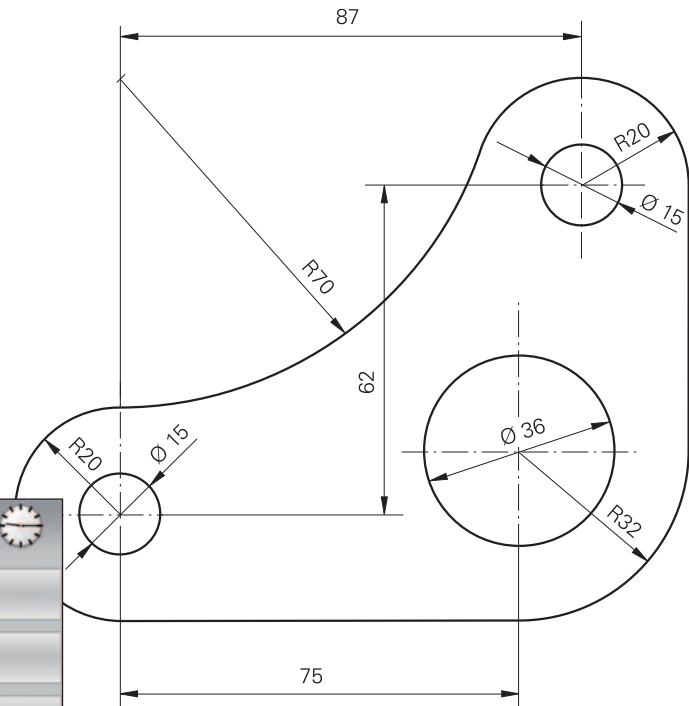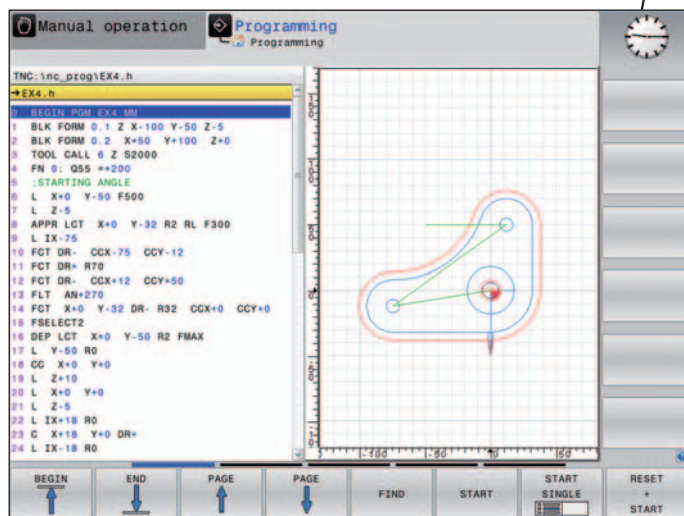

Programming in the workshop

– Field-proven cycles for recurring operations

Comprehensive fixed cycles for milling, drilling and boring

Frequently recurring operations that comprise several working steps are stored in the TNC 320 as cycles. You program them under conversational guidance and are supported by graphics that clearly illustrate the required input parameters.

Standard cycles


Besides the fixed cycles for drilling, tapping (with or without floating tap holder), thread milling, reaming, engraving and boring, there are cycles for hole patterns and milling cycles for clearing plane surfaces, and for roughing and finishing pockets, slots and studs.

Cycles for complex contours

The **Subcontour List cycles** (SL) are particularly helpful for clearing pockets with combined contours. This term is used to identify machining cycles for pilot drilling, roughing and finishing when the contour or subcontours are specified in subprograms. In this way, one contour description can be used for more than one operation using different tools.

Up to twelve **subcontours** can be superimposed for machining. The control automatically calculates the resulting contour and the tool paths for roughing or clearing the surfaces. Subcontours can be pockets or islands. Different components are combined to form a single pocket in which the tool avoids the islands.

The TNC 320 maintains a **finishing allowance** on the wall and floor surfaces during roughing. When **roughing** with different tools, the control identifies material remaining in inside corners so that it can be cleared later with smaller tools. A separate cycle is used for milling to the finished dimension.

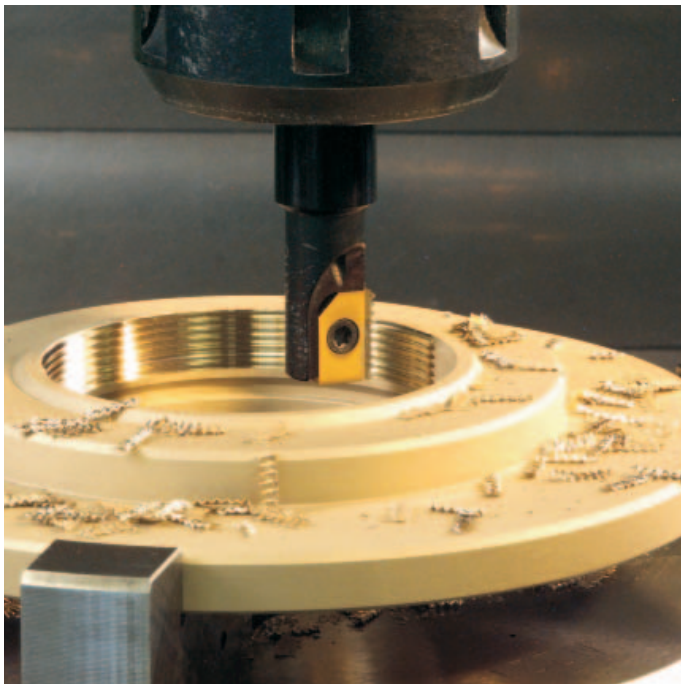

OEM cycles



As original equipment manufacturers (OEMs), machine tool builders can contribute their special manufacturing know-how by designing additional fixed cycles and saving them in the TNC 320. However, the end user can write his own cycles as well. HEIDENHAIN makes this possible with its PC program CycleDesign. This enables you to organize the input parameters and soft-key structure of the TNC 320 to suit your own needs.

Stay simple and flexible when programming machining patterns

Machining positions are often arranged in patterns on the workpiece. With the TNC 320, you can program very diverse machining patterns simply and extremely flexibly—of course with graphic support. You can define as many point patterns as desired with various numbers of points. Then you can execute all points at once or each point individually.

3-D machining with parametric programming

With parameter functions you can program simple 3-D geometric figures that can easily be described mathematically. Here you can use the basic arithmetical operations, trigonometric functions, roots, powers, logarithmic functions, parentheses, and logical comparisons with conditional jump instructions. Parametric programming also offers you a simple method of realizing 3-D operations. Of course, parametric programming is also suited for **2-D contours** that cannot be described with line segments or circular arcs, but rather through mathematical functions.

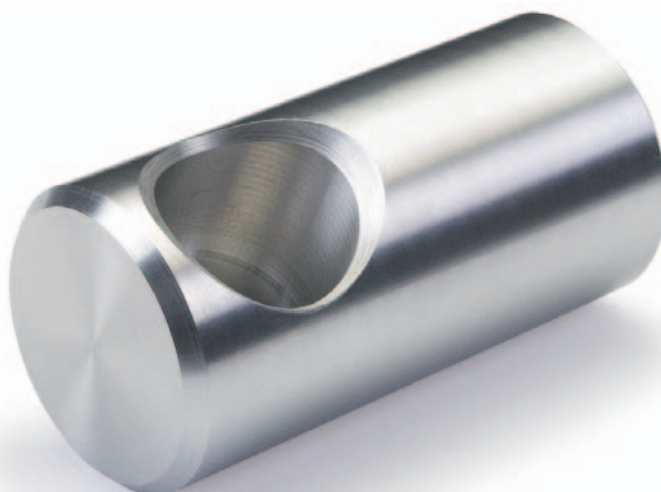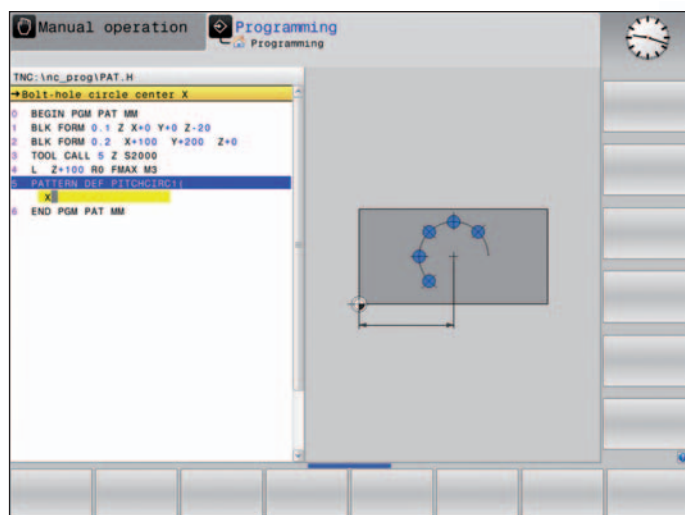

Programming in the workshop

– Reusing programmed contour elements

Coordinate transformation

If you should need a contour that has already been programmed at another position or in a different size, the TNC 320 offers you a simple solution: coordinate transformation.

With coordinate transformation you can, for example, **rotate or mirror** the coordinate system, or **shift the datum**. With a **scaling factor** you can enlarge or reduce contours to respect shrinkage or oversizes.

Program section repeats and subprograms


Many machining operations repeat themselves either on the same workpiece or on different workpieces. Once you have programmed a detail, there is no reason to have to program it again. With its sub-programming feature, the TNC can save you a great deal of programming time.

In **program section repeats**, you label a section of the program and during program run the TNC repeats the section successively as many times as required.

You can mark a program section as a **subprogram** and then call it at any point in the program and as often as you want.

With the **program call** function you can even use a completely separate program at any place in your current program. This gives you convenient access to preprogrammed, frequently needed working steps or contours.

Of course you can also combine these programming techniques.

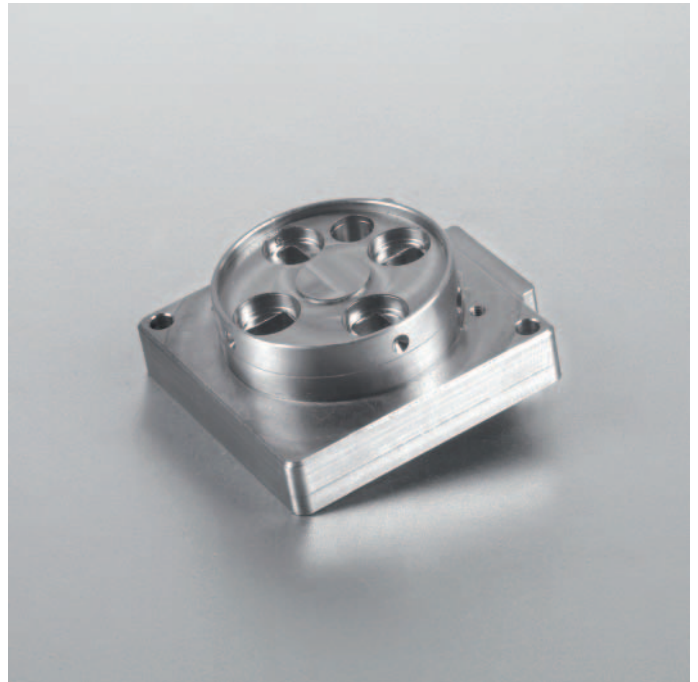

– Fast availability of all information

Do you have questions on a programming step but your User's Manual is not at hand? No problem: The TNC 320 numerical control and TNC 320 programming station now feature TNCguide, a convenient help system that can show the user documentation in a separate window.



You can activate TNCguide by simply pressing the help key on the TNC keyboard or by clicking any soft key with a cursor in the shape of a question mark. You switch the cursor by simply clicking the help symbol that is always visible on the TNC screen.

TNCguide usually displays the information in the immediate context of the element in question (context-sensitive help). This means that you immediately receive the relevant information. This function is particularly helpful with the soft keys. The method and effect of operation are explained in detail.

You can download the documentation in the desired language free of charge from the HEIDENHAIN homepage into the corresponding language directory on the TNC hard disk.

The following manuals are available in the help system:

- User's manual for Klartext conversational programming
- User's manual for cycle programming
- User's manual for ISO programming
- User's manual for the TNC 320 programming station (installed only with the programming station)

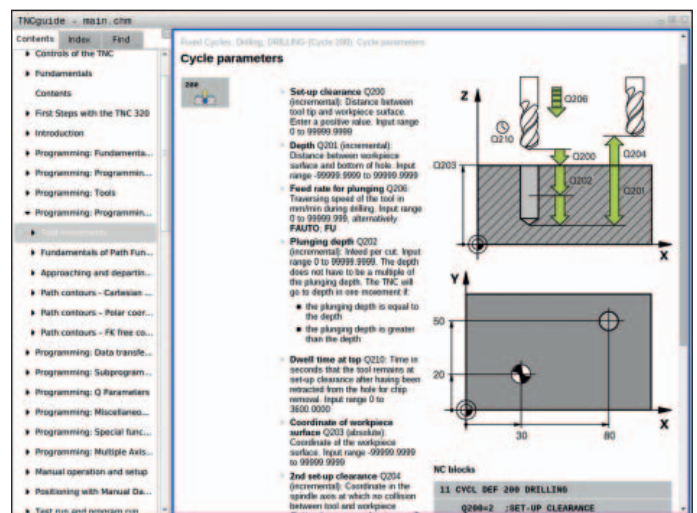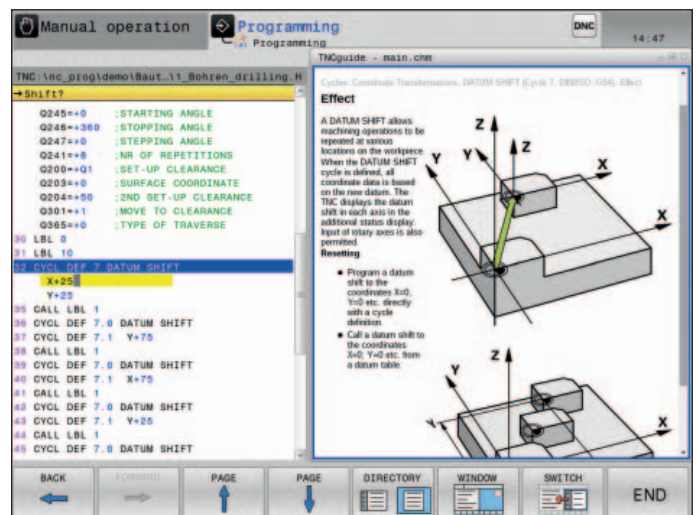

Open for communication

–The TNC 320 understands CAD files (option)

DXF converter (option)

Why program complex contours when your drawing is already in DXF format anyway? You can open DXF files directly on the TNC 320 in order to extract contours or machining positions from it. This not only saves time otherwise spent on programming and testing, you can also be sure that the finished contour is exactly according to the design engineer's specifications.

The DXF format—particularly the DXF format supported by the TNC 320—is very widespread and is supported by all common CAD and graphics programs.

After the DXF file has been loaded onto the TNC from the network or a USB stick, you can open the file in the file manager of the TNC, just like an NC program.

As a rule, DXF files contain multiple layers, with which the design engineer organizes the drawing. So that as little unnecessary information as possible appears on the screen during selection of the contours, with a keystroke you can hide all **excessive layers** contained in the DXF file. This requires an operating panel with touchpad or an external pointing device. The TNC can select a contour train even if it has been saved over **different layers**.

The TNC also supports you when **defining the workpiece datum**. The datum of the drawing for the DXF file is not always located in a manner that lets you use it directly as a reference point for the workpiece, especially when the drawing contains multiple views. For this reason, the TNC has a function with which you can shift the drawing datum to a suitable location simply by clicking an element.

You can define the following locations as reference point:

- The beginning, end or mid-point of a line
- The beginning, end or center point of a circular arc
- Quadrant transitions or center point of a circle
- Intersection of two lines, regardless of whether it is located inside or outside the programmed segments
- Intersection of a line and a circular arc
- Intersection of a line and a circle

If multiple intersections can result between two elements (e.g., between a straight line and a circle), you can select the correct intersection with a mouse click.



Contour selection is exceptionally user friendly. You select any element by clicking it with the mouse. As soon as you select a second element, the TNC detects your desired direction of machining, and starts the **automatic contour detection**. The TNC automatically selects all clearly identifiable contour elements until the contour closes or branches out. There you click the immediately following contour element. In this way you can define even extensive contours with just a few mouse clicks. If desired, you can also shorten, lengthen or interrupt the contour elements. You can then easily copy the selected contours over the clipboard into an existing Klartext program.

But you can also select **machining positions** and save them as point files,

particularly in order to use drilling positions or starting points for pocket machining. This can be done very easily: using the mouse, simply select the desired area. In a pop-up window with a filter function, the TNC displays all hole diameters that are within the area you have selected. To select the desired hole diameters and restrict the number of hole positions, simply click the corresponding filter symbol to change the filter limits.

A zoom function and various possibilities for settings round out the functionality of the DXF converter. In addition, you can define the resolution of the contour program to be output in case you want to use it on older TNC controls, or a transition tolerance if occasionally the elements do not quite adjoin.


CAD viewer

The integrated CAD viewer allows you to open standardized 3-D CAD models and drawings directly on the TNC 320. This powerful viewer is a simple and simultaneously efficient solution for displaying CAD design data on the shop floor. Different viewing options and functions for rotating and zooming enable you to visually monitor and analyze your CAD data in detail.


Moreover, you can also use the viewer to find position values and dimensions from the 3-D model. And you can set the datum as desired and select elements in the model. The CAD viewer shows the coordinates of the selected elements in a window.

The TNC 320 can display the following file formats:

- STEP files (.STP and .STEP)
- IGES files (.IGS and .IGES)
- DXF files (.DXF)

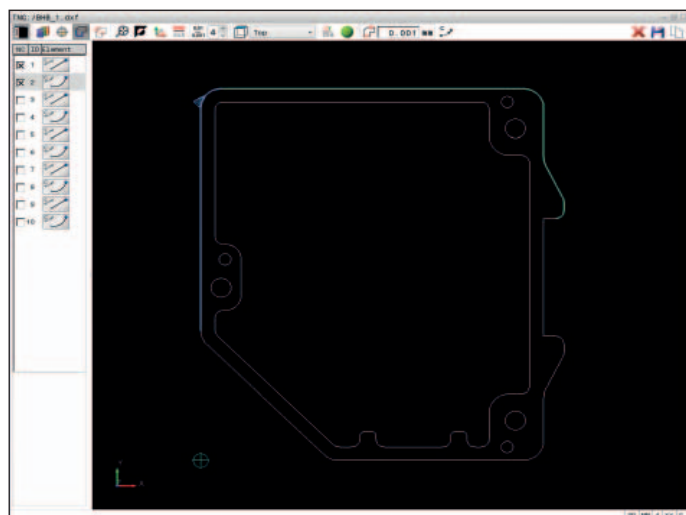

Contour selection from an imported DXF file

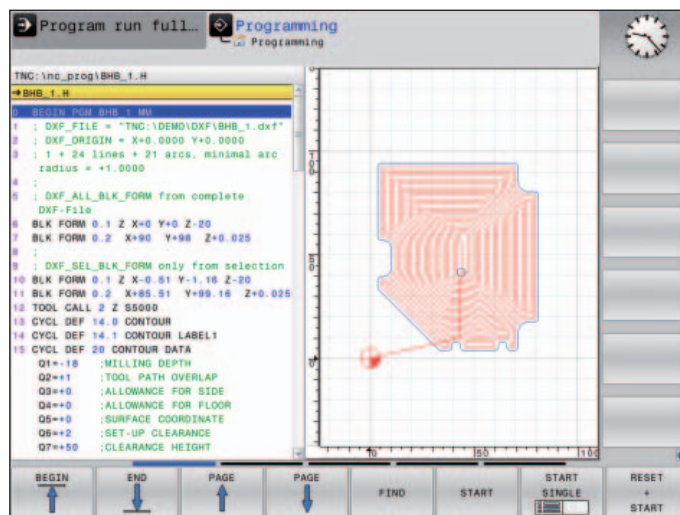

Part program on the basis of the imported DXF file

Open for communication


– Fast data transfer with the TNC

The networked TNC 320

The TNC 320 can be integrated into networks and connected with PCs, programming stations and other data storage devices. Even in its standard version, the TNC 320 features a latest-generation Fast Ethernet interface in addition to its RS-232-C/V.24 data interface. The TNC 320 communicates with NFS servers and Windows networks in TCP/IP protocol without needing additional software. The fast data transfer at rates of up to 1000 Mbps guarantees very short transfer times.

The transmitted programs are saved in the internal memory of the TNC 320 and are run from it at high speed.

For well-organized program management on your control, simply place the individual files in directories (folders). You can structure the respective directories through individual subdirectories.

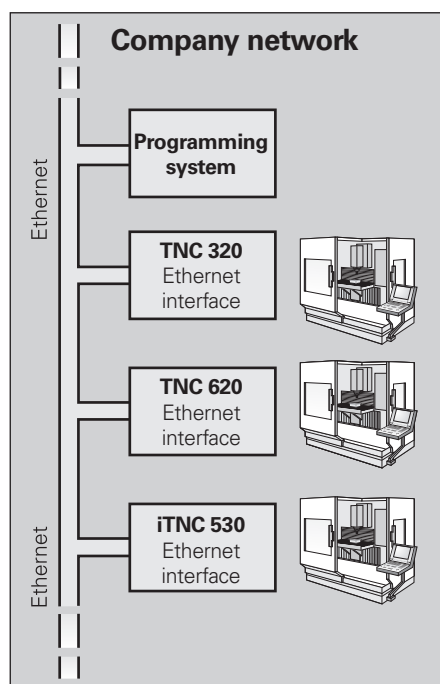

Programs for data transfer

With the aid of the free PC software

TNCremo from HEIDENHAIN, you can

- transfer remotely stored part programs and tool or pallet tables in both directions and
- make backups.

With the powerful **TNCremoPlus** PC software you can also transfer the screen contents of the control to your PC using the live-screen function.



– Display any file formats on the TNC screen


The integrated PDF viewer enables you to open PDF files directly on the control. The PDF format is a widely used data format that can be generated out of a great variety of applications. This enables you to easily view work instructions, drawings or other information in the TNC.

The integrated browser now lets you connect the TNC to the Internet and access it directly from the control.

The following further file formats can also be opened directly on the TNC with corresponding editors, and sometimes edited:

- Text files ending with .txt or .ini
- Graphic files ending with .gif, .bmp, .jpg, .png
- Table files ending with .xls or .csv
- HTML files

An operating panel with an integrated touchpad or an external USB pointing device is required for operation.

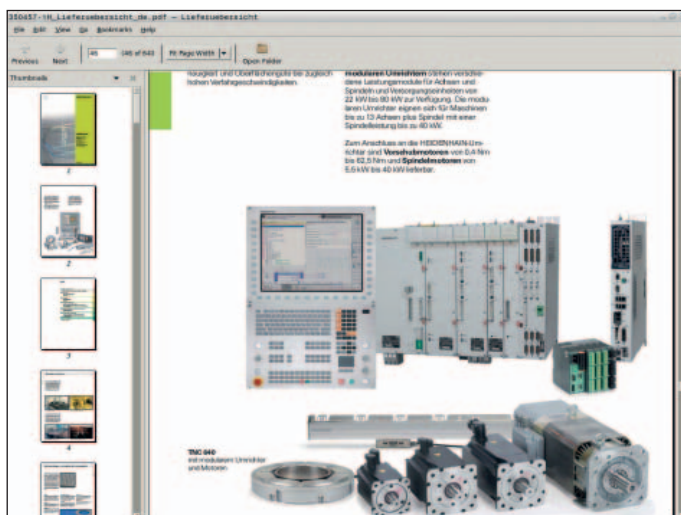

Open for communication

– The TNC 320 programming station

Why a programming station?

It's well known that it is easy to create part programs on a TNC 320 at the machine, even while another part is being machined. Nevertheless, short reloading times and other machining tasks can often hinder any prolonged or concentrated programming work. With the TNC 320 programming station you have the capability to program just as you do at the machine, but away from the noise and distractions of the shop floor.

Creating programs

Programming, testing and optimizing HEIDENHAIN Klartext or DIN/ISO programs for the TNC 320 with the programming station substantially reduces machine idle times. You need not adjust your way of thinking—every keystroke fits. On the programming station you program on the same keyboard as at the machine.

Testing of programs created offline

Of course you can also test programs that were written on a CAD/CAM system. The various views of the program verification graphics help you to easily spot contour damage and hidden details.

Training with the TNC 320 programming station

Because the TNC 320 programming station is based on the same software as the TNC 320, it is ideally suited for apprentice and advanced training. Programming and program testing function in exactly the same way as they do on the machine. This gives the trainee the experience needed to enable him to safely operate the machine later.

Because the TNC 320 can be programmed in Klartext conversational format and in DIN/ISO, the TNC 320 programming station can also be used in schools for TNC programming training.

More information about the programming station and a free demo version is available on the Internet at www.heidenhain.de. Or simply ask for the *Programming Stations for TNC Controls* CD or brochure.


Your workstation

The programming station software runs on a PC. The PC screen shows you the TNC user interface as on the control, and offers the familiar graphic support. Depending on the version of the programming station, there are several types of possibilities for using it.

The free **demo version** contains all functions of the TNC 320, and permits short programs to be saved. It is programmed via the PC keyboard.

On the version with the TE 520 B **TNC operating panel** you then create your programs as always, on a keyboard with the same function keys as on the control of the machine. It also has a PC keyboard for G-code programming, file names and comments.

But you can also work without the TNC operating panel: a **virtual keyboard** simulating the TE appears on the PC screen. It provides the TNC 320's most important dialog initiation keys.

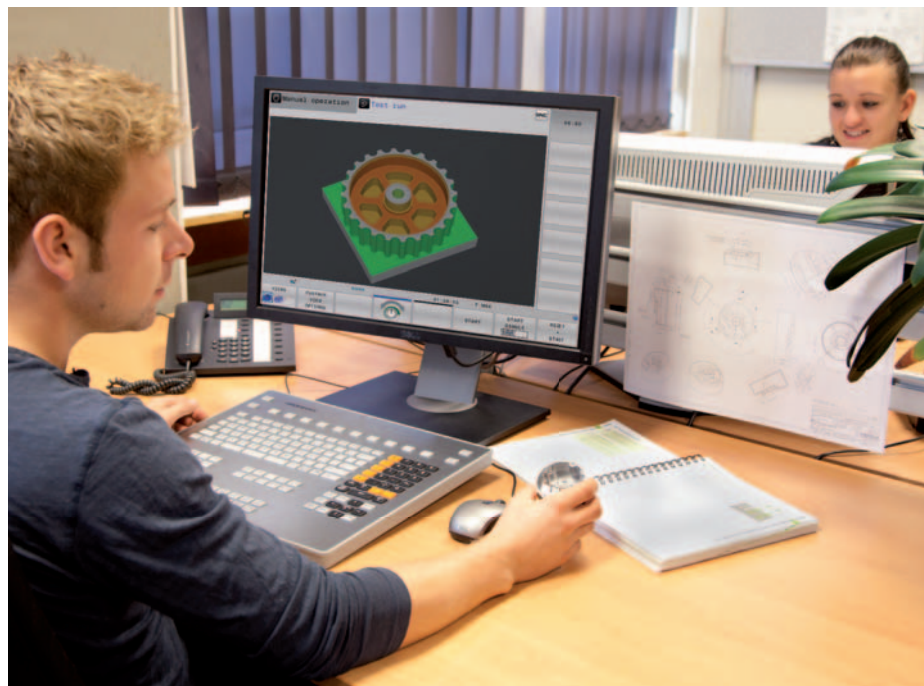

Programming station with TNC operating panel

Workpiece measurement

– Setup, presetting and measuring with touch trigger probes

Workpiece touch probes* from HEIDENHAIN help you to reduce costs in the workshop and in series production: Together with the TNC 320, touch probes can automatically perform setup, measuring and inspection functions.

The stylus of a TS touch trigger probe is deflected upon contact with a workpiece surface. At that moment the TS generates a trigger signal that, depending on the model, is transmitted either by cable or over an infrared beam to the control.

The touch probe* is inserted directly into the machine tool spindle. It can be equipped with various shanks depending on the machine. The ruby ball tips are available in several diameters, and the styli in different lengths.

* Machine and TNC must be specially adapted by the machine tool builder.

Touch probes with **cable connection for signal transmission** for machines with manual tool change and for grinding machines and lathes:



TS 260 – New generation, axial or radial cable

Touch probe with **radio or infrared signal transmission** for machines with automatic tool change:

TS 460 – New-generation standard touch probe for radio and infrared transmission with compact dimensions, energy-saving mode, optional collision protection and thermal decoupling

TS 444 – Battery-free voltage supply through integrated air turbine generator from compressed air, for infrared transmission, with compact dimensions

TS 740 – High probing accuracy and repeatability, low probing force, with infrared transmission

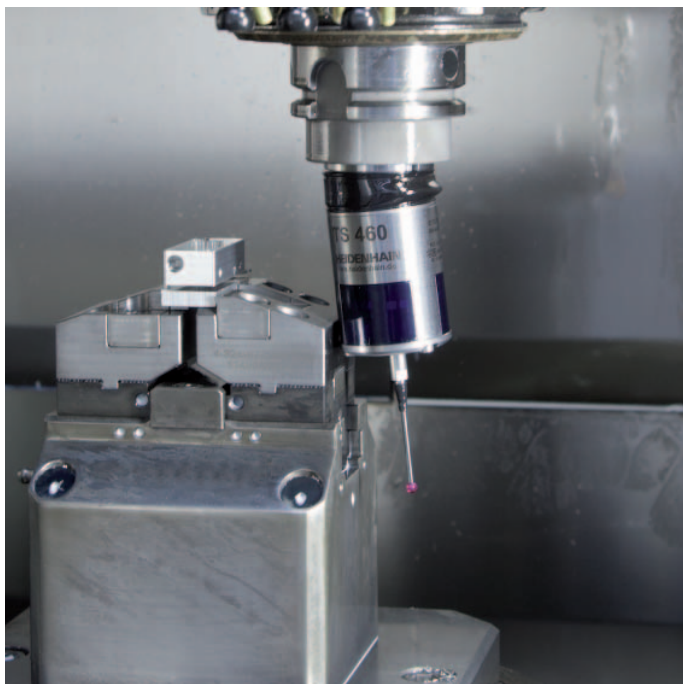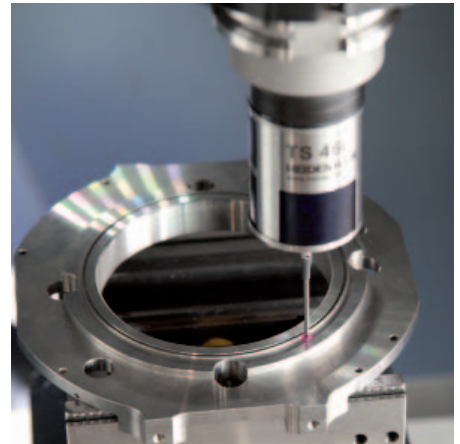

TS 460 with collision protection



More information about workpiece touch probes is available on the Internet at www.heidenhain.de or in the *Touch Probes* brochure.

Tool measurement

– Measuring length, radius and wear directly in the machine

The tool is of course a decisive factor in ensuring a consistently high level of production quality. This means that an exact measurement of the tool dimensions and periodic inspection of the tool for wear and breakage, as well as the shape of each tooth, are necessary. HEIDENHAIN offers the TT trigger tool touch probes as well as the non-contacting TL Nano and TL Micro laser systems for tool measurement.

The systems are installed directly in the machine's workspace, where they permit tool measurement either before machining or during interruptions.

The **TT tool touch probes** measure the tool length and radius. When probing the rotating or stationary tool, e.g. during individual tooth measurement, the contact plate is deflected and a trigger signal is transmitted directly to the TNC 320.

The **TT 160** uses signal transmission by cable, whereas the **TT 460** operates with wireless signal transmission over radio or an infrared beam. It is therefore particularly suitable for use on rotary and tilting tables.

The **TL Nano** and **TL Micro laser systems** are available for various maximum tool diameters. Using a laser beam, they probe the tool without contact, and can detect form errors of individual teeth along with the tool length and radius.



TT 460



TL Micro

More information about tool touch probes is available on the Internet at www.heidenhain.de or in the *Touch Probes* brochure.

Positioning with the electronic handwheel

– Delicate axis traverse

To set up the workpiece you can use the direction keys to move the machine axes manually. A simpler and more sensitive way, however, is to use the electronic handwheels from HEIDENHAIN.

You can move the axis slide through the feed motors in direct relation to the rotation of the handwheel. For delicate operations you can set the transmission ratio to certain preset distances per handwheel revolution.

Panel-mounted handwheels

The HR 130 and HR 150 panel-mounted handwheels from HEIDENHAIN can be integrated in the machine operating panel or mounted at another location on the machine. An adapter permits connection of up to three HR 150 electronic panel-mounted handwheels.

Portable handwheels

The HR 510, HR 520 and HR 550 portable handwheels are particularly helpful for when you have to work close to the machine's working space. The axis keys and certain functional keys are integrated in the housing. In this way you can switch axes and set up the machine at any time—regardless of where you happen to be standing. The HR 520 and HR 550 handwheels feature an integrated display for user-friendly remote operation of the control. As a wireless handwheel, the HR 550 is ideal for use on large machine tools. If you no longer need the handwheel, just attach it to the machine somewhere by its built-in magnets.

Expanded feature content of HR 520, HR 550

- Traverse distance per revolution can be set
- Display for operating mode, actual position value, programmed feed rate and spindle speed, error messages
- Override potentiometer for feed rate and spindle speed
- Selection of axes via keys or soft keys
- Keys for continuous traverse of the axes
- Emergency stop button
- Actual position capture
- NC start/stop
- Spindle on/off
- Soft keys for machine functions defined by the machine tool builder



HR 550

Overview

– User functions

User functions	Standard	Option	
Short description	•	<ul style="list-style-type: none"> ○ 1st additional axis for 4 axes plus open-loop or closed-loop spindle ○ 2nd additional axis for 5 axes plus open-loop or closed-loop spindle 	
Program entry	•	HEIDENHAIN Klartext conversational	
	•	DIN/ISO via soft keys or via USB keyboard	
Position entry	•	Nominal positions for lines and arcs in Cartesian coordinates or polar coordinates	
	•	Incremental or absolute dimensions	
	•	Display and entry in mm or inches	
Tool compensation	•	Tool radius in the working plane and tool length	
	•	Radius compensated contour look ahead for up to 99 blocks (M120)	
Tool tables	•	Multiple tool tables with any number of tools	
Cutting data	•	Automatic calculation of spindle speed, cutting speed, feed per tooth and feed per revolution	
Constant contour speed	•	Relative to the path of the tool center	
	•	Relative to the tool's cutting edge	
Parallel operation	•	Creating a program with graphical support while another program is being run	
Machining with a rotary table		8 Programming of cylindrical contours as if in two axes	
		8 Feed rate in distance per minute	
Contour elements	•	Straight line	
	•	Chamfer	
	•	Circular path	
	•	Circle center	
	•	Circle radius	
	•	Tangentially connecting circular arc	
	•	Corner rounding	
Approaching and departing the contour	•	Via straight line: tangential or perpendicular	
	•	Via circular arc	
FK free contour programming	•	FK free contour programming in HEIDENHAIN Klartext conversational format with graphic support for workpiece drawings not dimensioned for NC	
Program jumps	•	Subprograms	
	•	Program section repeats	
	•	Calling any program as a subprogram	
Fixed cycles	•	Cycles for drilling, pecking, reaming, boring, counterboring, conventional and rigid tapping	
	•	Cycles for milling internal and external threads	
	•	Rectangular and circular pockets	
	•	Face milling	
	•	Cycles for clearing level and inclined surfaces	
	•	Multioperation machining of straight and circular slots	
	•	Multioperation machining of rectangular and circular pockets	
	•	Cartesian and polar point patterns	
	•	Contour train, contour-parallel contour pocket	
	•	OEM cycles (special cycles developed by the machine tool builder) can be integrated	
	•	Engraving cycle: Engrave text or numbers in a straight line or on an arc	

User functions	Standard	Option
Coordinate conversions	•	8 Shifting, rotating, mirroring, scaling (axis specific) Tilting the working plane, PLANE function
Q parameters Programming with variables	•	Mathematical functions =, +, -, *, /, sin α, cos α, tan α, arc sin, arc cos, arc tan, a ⁿ , e ⁿ , ln, log, √a, √a ² + b ² • Logical operations (=, ≠, <, >) • Calculating with parentheses • Absolute value of a number, constant π, negation, truncation of digits before or after the decimal point • Functions for calculation of circles
Programming aids	•	Calculator • Complete list of all current error messages • Context-sensitive help function for error messages • TNCguide: The integrated help system. User information available directly on the TNC 320 • Graphic support for programming cycles • Comment and structure blocks in the NC program
Teach-In	•	Actual positions can be transferred directly into the NC program
Test graphics Display modes	•	Graphic simulation before a program run, even while another program is running • Plan view/projection in 3 planes/3-D view, also in tilted working plane/3-D line graphics • Detail zoom
Programming graphics	•	In the Programming and Editing mode, the contours of the NC blocks are drawn on screen while they are being entered (2-D pencil-trace graphics), even while another program is running
Program-run graphics Display modes	•	Graphic simulation during real-time machining • Plan view/view in three planes/3-D view
Machining time	•	Calculation of machining time in the Test Run operating mode • Display of the current machining time in the Program Run operating modes
Returning to the contour	•	Mid-program startup in any block in the program, returning the tool to the calculated nominal position to continue machining • Program interruption, contour departure and return
Reference-point management	•	For saving any reference points
Datum tables	•	Multiple datum tables for storing workpiece-specific datums
Touch probe cycles	•	Calibrating the touch probe • Compensating workpiece misalignment • Datum setting, manual or automatic • Automatic tool and workpiece measurement
Parallel secondary axes	•	Compensating movement in the secondary axes U, V, W through the principal axes X, Y, Z • Including movements of the parallel axis in the position display of the associated principal axis (sum display) • Defining the principal and secondary axes in the NC program makes it possible to run programs on different machine configurations
Conversational languages	•	English, German, Czech, French, Italian, Spanish, Portuguese, Swedish, Danish, Finnish, Dutch, Polish, Hungarian, Russian (Cyrillic), Chinese (traditional, simplified), Slovenian, Slovak, Norwegian, Korean, Turkish, Romanian
CAD viewer	•	Display CAD models on the TNC

Overview

- Options
- Accessories

Option	Option number	As of NC software 771851-	ID	Comment
Additional axis	–	01	–	<ul style="list-style-type: none"> • 1st additional axis for 4 axes plus open-loop or closed-loop spindle • 2nd additional axis for 5 axes and open-loop spindle
Advanced function set 1	8	01	536164-01	Machining with a rotary table <ul style="list-style-type: none"> • Programming of cylindrical contours as if in two axes • Feed rate in distance per minute
		01		Interpolation <ul style="list-style-type: none"> • Circular in 3 axes with tilted working plane Coordinate transformation <ul style="list-style-type: none"> • Tilting the working plane • PLANE function
HEIDENHAIN DNC	18	01	526451-01	Communication with external PC applications over COM component
DXF converter	42	01	526450-01	Loading and converting DXF contours
Extended tool management	93	02	676938-01	Extended tool management

Accessories	
Electronic handwheels	<ul style="list-style-type: none"> • One HR 510 portable handwheel, or • one HR 520 portable handwheel with display, or • one HR 550 portable wireless handwheel with display, or • one HR 130 panel-mounted handwheel, or • up to three HR 150 panel-mounted handwheels through an HRA 110 handwheel adapter
Workpiece measurement	<ul style="list-style-type: none"> • TS 260: Touch trigger probe with cable connection, or • TS 460: Touch trigger probe with radio or infrared transmission, or • TS 444: Touch trigger probe with infrared transmission, or • TS 640: Touch trigger probe with infrared transmission, or • TS 740: Touch trigger probe with infrared transmission
Tool measurement	<ul style="list-style-type: none"> • TT 160: 3-D touch trigger probe, or • TT 460: 3-D touch trigger probe with radio or infrared transmission • TL Nano: Laser system for contact-free workpiece measurement, or • TL Micro: Laser system for contact-free workpiece measurement
Software for PCs	<ul style="list-style-type: none"> • TeleService: Software for remote diagnostics, monitoring, and operation • CycleDesign: Software for creating your own cycle structure • TNCremo: Software for data transfer—free of charge • TNCremoPlus: Software for data transfer with live-screen function
Programming station	Control software for PCs for programming, archiving, and training <ul style="list-style-type: none"> • Single-station license with original control keyboard • Single-station license with virtual keyboard • Network license with virtual keyboard • Demo version with virtual keyboard or PC keyboard—free of charge

– Specifications

Specifications	
Components	<ul style="list-style-type: none"> • Main computer with TNC keyboard and integrated 15.1-inch TFT color flat-panel display with soft keys
Operating system	<ul style="list-style-type: none"> • HEROS 5 real-time operating system for machine control
Memory	<ul style="list-style-type: none"> • 1.8 GB (on CFR compact flash memory card)
Input resolution and display step	<ul style="list-style-type: none"> • Linear axes: to 0.1 μm • Angular axes: to 0.0001°
Input range	<ul style="list-style-type: none"> • Maximum 99999.999 mm or 99999.999°
Interpolation	<ul style="list-style-type: none"> • Linear in 4 axes • Circular in 2 axes • Circular in 3 axes with tilted working plane • Helical: superimposition of circular and straight paths
Block processing time	<ul style="list-style-type: none"> • 3 ms (3-D straight line without radius compensation)
Axis feedback control	<ul style="list-style-type: none"> • Position resolution: Signal period of the position encoder/1024 • Cycle time of position controller: 3 ms
Range of traverse	<ul style="list-style-type: none"> • Maximum 100 m
Spindle speed	<ul style="list-style-type: none"> • Maximum 100 000 rpm (analog speed command signal)
Error compensation	<ul style="list-style-type: none"> • Linear and nonlinear axis error, backlash, reversal peaks during circular movements, thermal expansion • Static friction, reversal error, sliding friction
Data interfaces	<ul style="list-style-type: none"> • RS-232-C/V.24 max. 115 kbps • Extended data interface with LSV2 protocol for remote operation of the TNC 320 over the data interface with the HEIDENHAIN software TNCremo or TNCremoPlus • Gigabit Ethernet interface 1000BASE-T • 3 x USB (1 x front USB 2.0; 2 x back panel USB 3.0)
Diagnostics	<ul style="list-style-type: none"> • Fast and simple troubleshooting through integrated diagnostic aids
Ambient temperature	<ul style="list-style-type: none"> • Operation: 0 °C to +45 °C • Storage: -20 °C to +60 °C

HEIDENHAIN

DR. JOHANNES HEIDENHAIN GmbH

Dr.-Johannes-Heidenhain-Straße 5

83301 Traunreut, Germany

☎ +49 8669 31-0

FAX +49 8669 32-5061

E-mail: info@heidenhain.de

www.heidenhain.de

Vollständige und weitere Adressen siehe www.heidenhain.de
For complete and further addresses see www.heidenhain.de

DE	HEIDENHAIN Vertrieb Deutschland 83301 Traunreut, Deutschland ☎ 08669 31-3132 FAX 08669 32-3132 E-Mail: hd@heidenhain.de	ES	FARRESA ELECTRONICA S.A. 08028 Barcelona, Spain www.farresa.es	PL	APS 02-384 Warszawa, Poland www.heidenhain.pl
	HEIDENHAIN Technisches Büro Nord 12681 Berlin, Deutschland ☎ 030 54705-240	FI	HEIDENHAIN Scandinavia AB 01740 Vantaa, Finland www.heidenhain.fi	PT	FARRESA ELECTRÓNICA, LDA. 4470 - 177 Maia, Portugal www.farresa.pt
	HEIDENHAIN Technisches Büro Mitte 07751 Jena, Deutschland ☎ 03641 4728-250	FR	HEIDENHAIN FRANCE sarl 92310 Sèvres, France www.heidenhain.fr	RO	HEIDENHAIN Reprezentantă Romania Braşov, 500407, Romania www.heidenhain.ro
	HEIDENHAIN Technisches Büro West 44379 Dortmund, Deutschland ☎ 0231 618083-0	GB	HEIDENHAIN (G.B.) Limited Burgess Hill RH15 9RD, United Kingdom www.heidenhain.co.uk	RS	Serbia → BG
	HEIDENHAIN Technisches Büro Südwest 70771 Leinfelden-Echterdingen, Deutschland ☎ 0711 993395-0	GR	MB Milionis Vassilis 17341 Athens, Greece www.heidenhain.gr	RU	OOO HEIDENHAIN 115172 Moscow, Russia www.heidenhain.ru
	HEIDENHAIN Technisches Büro Südost 83301 Traunreut, Deutschland ☎ 08669 31-1345	HK	HEIDENHAIN LTD Kowloon, Hong Kong E-mail: sales@heidenhain.com.hk	SE	HEIDENHAIN Scandinavia AB 12739 Skärholmen, Sweden www.heidenhain.se
		HR	Croatia → SL	SG	HEIDENHAIN PACIFIC PTE LTD. Singapore 408593 www.heidenhain.com.sg
AR	NAKASE SRL. B1653AOX Villa Ballester, Argentina www.heidenhain.com.ar	HU	HEIDENHAIN Kereskedelmi Képviselet 1239 Budapest, Hungary www.heidenhain.hu	SK	KOPRETINA TN s.r.o. 91101 Trenčín, Slovakia www.kopretina.sk
AT	HEIDENHAIN Techn. Büro Österreich 83301 Traunreut, Germany www.heidenhain.de	ID	PT Servitama Era Toolsindo Jakarta 13930, Indonesia E-mail: ptset@group.gts.co.id	SL	NAVO d.o.o. 2000 Maribor, Slovenia www.heidenhain.si
AU	FCR Motion Technology Pty. Ltd Laverton North 3026, Australia E-mail: vicsales@fcrmotion.com	IL	NEUMO VARGUS MARKETING LTD. Tel Aviv 61570, Israel E-mail: neumo@neumo-vargus.co.il	TH	HEIDENHAIN (THAILAND) LTD Bangkok 10250, Thailand www.heidenhain.co.th
BE	HEIDENHAIN NV/SA 1760 Roosdaal, Belgium www.heidenhain.be	IN	HEIDENHAIN Optics & Electronics India Private Limited Chetpet, Chennai 600 031, India www.heidenhain.in	TR	T&M Mühendislik San. ve Tic. LTD. ŞTİ. 34775 Y. Dudullu – Ümraniye-Istanbul, Turkey www.heidenhain.com.tr
BG	ESD Bulgaria Ltd. Sofia 1172, Bulgaria www.esd.bg	IT	HEIDENHAIN ITALIANA S.r.l. 20128 Milano, Italy www.heidenhain.it	TW	HEIDENHAIN Co., Ltd. Taichung 40768, Taiwan R.O.C. www.heidenhain.com.tw
BR	DIADUR Indústria e Comércio Ltda. 04763-070 – São Paulo – SP, Brazil www.heidenhain.com.br	JP	HEIDENHAIN K.K. Tokyo 102-0083, Japan www.heidenhain.co.jp	UA	Gertner Service GmbH Büro Kiev 01133 Kiev, Ukraine www.heidenhain.ua
BY	GERTNER Service GmbH 220026 Minsk, Belarus www.heidenhain.by	KR	HEIDENHAIN Korea LTD. Gasam-Dong, Seoul, Korea 153-782 www.heidenhain.co.kr	US	HEIDENHAIN CORPORATION Schaumburg, IL 60173-5337, USA www.heidenhain.com
CA	HEIDENHAIN CORPORATION Mississauga, Ontario L5T2N2, Canada www.heidenhain.com	MX	HEIDENHAIN CORPORATION MEXICO 20290 Aguascalientes, AGS., Mexico E-mail: info@heidenhain.com	VE	Maquinaria Diekmann S.A. Caracas, 1040-A, Venezuela E-mail: purchase@diekmann.com.ve
CH	HEIDENHAIN (SCHWEIZ) AG 8603 Schwerzenbach, Switzerland www.heidenhain.ch	MY	ISOSERVE SDN. BHD. 43200 Balakong, Selangor E-mail: sales@isoserve.com.my	VN	AMS Co. Ltd HCM City, Vietnam E-mail: davidgoh@amsvn.com
CN	DR. JOHANNES HEIDENHAIN (CHINA) Co., Ltd. Beijing 101312, China www.heidenhain.com.cn	NL	HEIDENHAIN NEDERLAND B.V. 6716 BM Ede, Netherlands www.heidenhain.nl	ZA	MAFEMA SALES SERVICES C.C. Midrand 1685, South Africa www.heidenhain.co.za
CZ	HEIDENHAIN s.r.o. 102 00 Praha 10, Czech Republic www.heidenhain.cz	NO	HEIDENHAIN Scandinavia AB 7300 Orkanger, Norway www.heidenhain.no		
DK	TPTEKNIK A/S 2670 Greve, Denmark www.tp-gruppen.dk	PH	Machinebanks Corporation Quezon City, Philippines 1113 E-mail: info@machinebanks.com		

