


Audible Alarm

BK



* Indoor Only

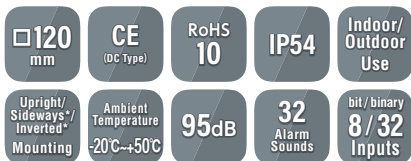

-J (Light gray)

-K (Dark gray)

Model Number Configuration

BK-24A-J

①

②


③

- ① Rated Voltage
24 = 12 - 24V DC
100 = 100V AC
220 = 220V AC
- ② Alarm Type*
A = Type A
C = Type C
D = Type D
E = Type E
- ③ Colors
J = Light Gray
K = Dark Gray

The following custom specifications are available.
● PNP open collector specifications

* Please refer to the Sound Selection Chart on page 84 for alarm details.

Dimensions (mm)

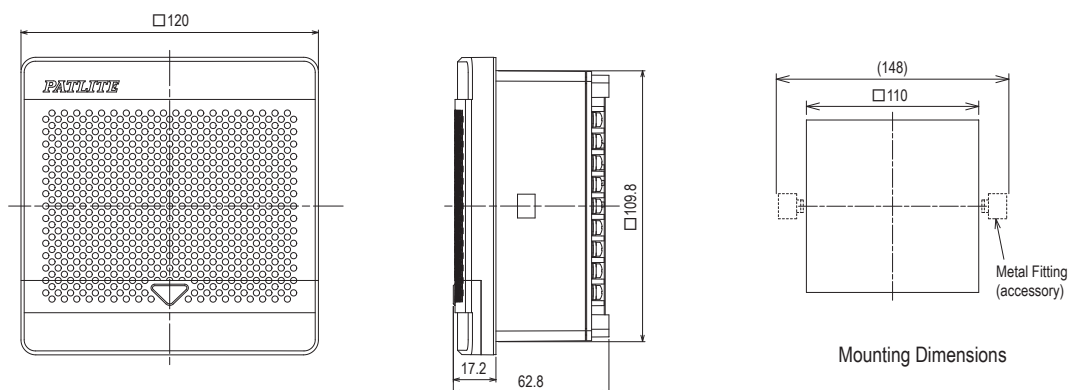

Mounting Dimensions

Product List

Model Number	Rated Voltage	Alarm Type	Color	Power Consumption	Mass
BK-24 □ -J/K	12 - 24V DC	A/C/D/E	Light Gray, Dark Gray	12W	0.35kg
BK-100 □ -J/K	100V AC	A/C/D/E	Light Gray, Dark Gray	10W	0.53kg
BK-220 □ -J/K	220V AC	A/C/D/E	Light Gray, Dark Gray	11W	0.53kg

Other Specifications

Supported Transistors	NPN
Volume Control	Rotating knob

Optional Parts

For details refer to P. 99 to P. 104

Product Description	Model Number
Mounting bracket	BK-001 (2 fixed seals attached)
Mounting bracket	BK-002-J
Mounting bracket	BK-002-K
SD card (2GB)	SDV-2GP

* BK-001 can be used to install the product with □130mm mounting holes from older models.