


CLA-A-EX

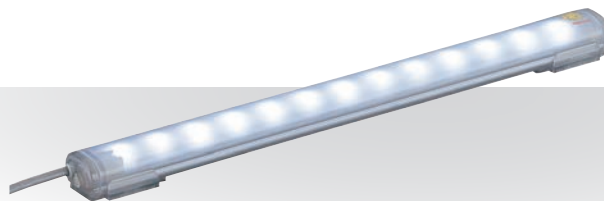

CLA3S-24A-CD-30-EX

Model Number Configuration


CLA1S-24A-CD-30-EX

①

②

- ① Length of Illuminated Area
 1 = 100mm 6 = 600mm
 2 = 200mm 9 = 900mm
 3 = 300mm 12 = 1200mm
- ② Luminous Color
 CD = Daylight 6800K

Dimensions (mm)

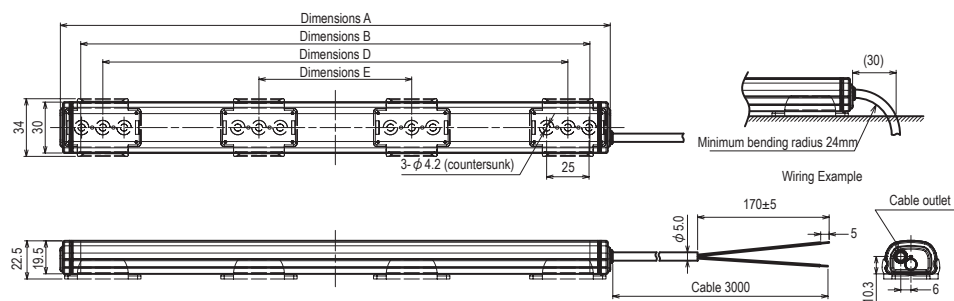

Series	Dimension A	Dimension B	Dimension D	Dimension E	Number of Brackets Included (SZ-310AR)
	Full Length	Length of Illuminated Area	Recommended Mounting Pitch		
CLA1S-	124	100	74	—	2
CLA2S-	224	200	174	—	2
CLA3S-	324	300	274	—	2
CLA6S-	624	600	574	—	2
CLA9S-	924	900	874	290	4
CLA12S-	1224	1200	1174	390	4

Product List

Model Number	Rated Voltage	Length of Illuminated Area	Luminous Color	Central Illuminance (at 0.5m)
CLA1S-24A-CD-30-EX	24V DC	100mm	Daylight	140lx
CLA2S-24A-CD-30-EX	24V DC	200mm	Daylight	270lx
CLA3S-24A-CD-30-EX	24V DC	300mm	Daylight	400lx
CLA6S-24A-CD-30-EX	24V DC	600mm	Daylight	650lx
CLA9S-24A-CD-30-EX	24V DC	900mm	Daylight	810lx
CLA12S-24A-CD-30-EX	24V DC	1200mm	Daylight	890lx

Explosion Protection Standards

CE II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIC T135°C Dc

Optional Parts

For details refer to P. 99 to P. 104

Product Description	Model Number
Rear mounting (M4 screws not included)	SZ-310AR
Rear mounting (Magnetic)	SZ-310ARM
Side mounting (M4 screws not included)	SZ-310AS
Side mounting (M4 screws not included)	SZ-310ASB (Compatible with CLB-24N series)
Bracket for CLA	SZ-310EU

Note: Take care to prevent the magnet (SZ-310ARM) from falling. Use screw-on type brackets for permanent installations.