

Explosion Proof LED Work Light

CLK-24(A)-EX



CLK3S-24AAG-CD-EX

CE

RoHS 10

IP66G

IP67G

IP69K

Indoor Use

Mounting in All Directions

Zone 2 Zone 22

Ambient Temperature -40°C~+60°C

Daylight Natural White



CLK6S-24AAG-CD-EX

Model Number Configuration

CLK2S-24AG-CD-EX


① ② ③ ④

- ① Luminous Segment Length
2 = 200mm
3 = 300mm
6 = 600mm
- ② Wiring Specifications
S = Side-exiting Cable *1
C = M12 Connector
- ③ Body Material
AAG = Aluminum & Glass
SG = Stainless Steel & Glass *2
- ④ Luminous Color
CD = Daylight
CN = Natural White


*1. AAG only. *2. 3C only

Dimensions (mm)


CLK3C-24SG-□-EX

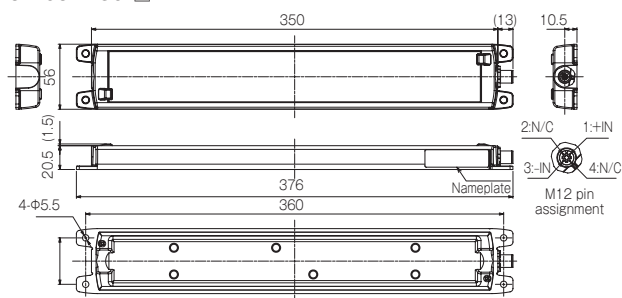


CLK □□-24(A)AG-□-EX

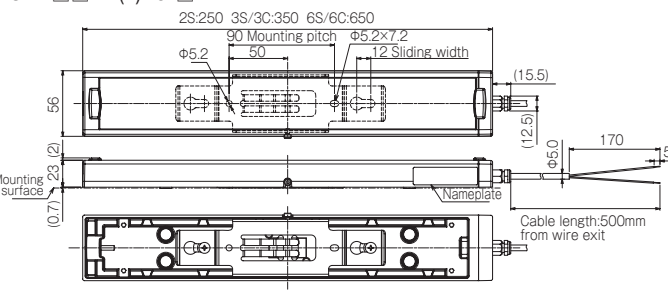

S type



C type



Product List

Model Number	Rated Voltage	Luminous Segment Length	Luminous Color	Central Illuminance (at 1.0m)
CLK2□-24□□-CD-EX	24V DC	200mm	Daylight	820lx
CLK3□-24□□-CD/CN-EX	24V DC	300mm	Daylight Natural White	1200lx
CLK6□-24□□-CD-EX	24V DC	600mm	Daylight	2100lx

Explosion Protection Standards

CE II 3G Ex nA IIC T4 Gc, II 3 D Ex tc IIIC T125°C Dc

Optional Parts

For details refer to P. 99 to P. 104

Product Description	Model Number
Outer mounting bracket	CLK-001
Swivel bracket	SZ-320KS (one set)