


LED Work Light

CLK/CLK-A

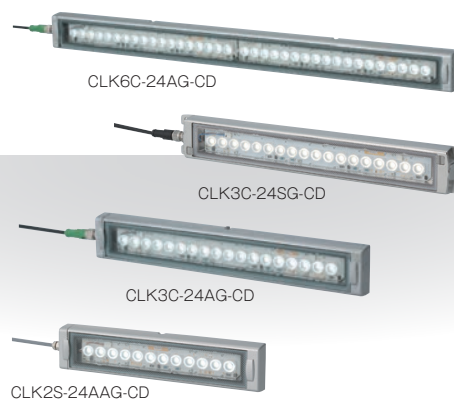

Model Number Configuration

C: M12 Connector Type

CLK3C-24AG-CD

①

②

③

① Length

2C = 200mm, M12 Connector
3C = 300mm, M12 Connector
3CL = 300mm, Daisy Link
6C = 600mm, M12 Connector
6CL = 600mm, Daisy Link

② Material

AG = Body: Aluminum
Lens: Tempered Glass
SG = Body: Stainless Steel
Lens: Tempered Glass
SA = Body: Stainless Steel
Lens: Acrylic Resin + PET Film + Tempered Glass

③ Luminous Color

CD = Daylight
CN = Natural White (3C only)

S: Cable Type

CLK3S-24AAG-CD

①

②

③

① Length

2S = 200mm
3S = 300mm
6S = 600mm

② Material

AG = Body: Aluminum
Lens: Tempered Glass

③ Luminous Color

CD = Daylight
CN = Natural White (3S only)

Product List

Model Number	Rated Voltage	Length of Illuminated Area	Body Material	Lens	Wiring Type	Luminous Color	Power Consumption	Mass
CLK2C-24AG-CD+FL005	24V DC	200mm	Aluminum	Tempered glass	M12 connector	Daylight	8.4W	0.526kg
CLK3C-24AG-CD/CN	24V DC	300mm	Aluminum	Tempered glass	M12 connector	CD: Daylight CN: Natural white	12.5W	0.676kg
CLK3C-24SA-CD/CN	24V DC	300mm	Stainless steel	Acrylic resin + PET film + Tempered glass	M12 connector	CD: Daylight CN: Natural white	12.5W	1.450kg
CLK3C-24SG-CD/CN	24V DC	300mm	Stainless steel	Tempered glass	M12 connector	CD: Daylight CN: Natural white	12.5W	1.490kg
CLK3CL-24AG-CD	24V DC	300mm	Aluminum	Tempered glass	M12 connector Daisy link	Daylight	12.5W	0.676kg
CLK3CL-24SA-CD	24V DC	300mm	Stainless steel	Acrylic resin + PET film + Tempered glass	M12 connector Daisy link	Daylight	12.5W	1.450kg

Product List

Model Number	Rated Voltage	Length of Illuminated Area	Body Material	Lens	Wiring Type	Luminous Color	Power Consumption	Mass
CLK3CL-24SG-CD	24V DC	300mm	Stainless steel	Tempered glass	M12 connector Daisy link	Daylight	12.5W	1.490kg
CLK6C-24AG-CD	24V DC	600mm	Aluminum	Tempered glass	M12 connector	Daylight	25W	1.222kg
CLK6CL-24AG-CD	24V DC	600mm	Aluminum	Tempered glass	M12 connector Daisy link	Daylight	25W	1.222kg
CLK2S-24AAG-CD	24V DC	200mm	Aluminum	Tempered glass	0.5m cable	Daylight	8.4W	0.526kg
CLK3S-24AAG-CD/CN	24V DC	300mm	Aluminum	Tempered glass	0.5m cable	CD: Daylight CN: Natural white	12.5W	0.676kg
CLK6S-24AAG-CD	24V DC	600mm	Aluminum	Tempered glass	0.5m cable	Daylight	25W	1.222kg

Optional Parts

For details refer to P. 99 to P. 104


Product Description	Model Number
Outer mounting bracket	CLK-001
Swivel bracket	SZ-320KS (1 pair)

Specification


Description	Distance	Luminous Segment Length		
		200mm	300mm	600mm
Illuminance (Center, typical)	At 1.0m	820lx	1,200lx	2,100lx
	At 2.0m	200lx	300lx	580lx

Dimensions (mm)


S-AG/C-AG specifications

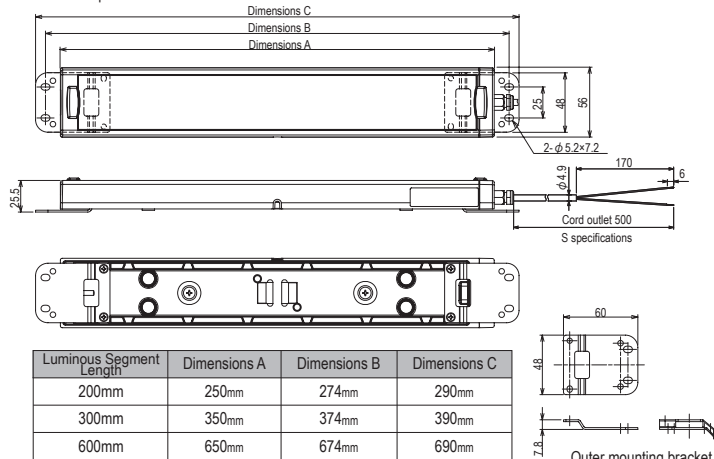


C-SG specifications

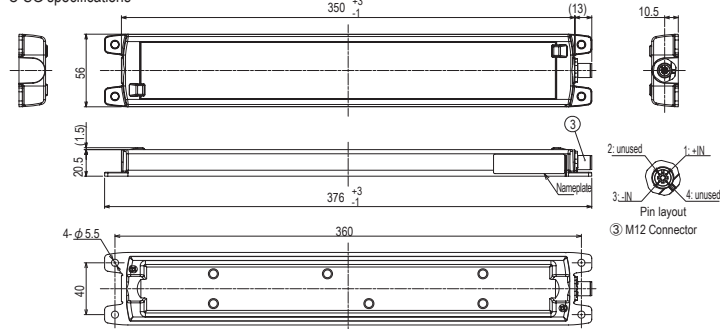


S specifications



C specifications



CL specifications



Caution
Please waterproof and oil-proof the end of the cable if it will come in contact with water or be in a low temperature environment.