

Explosion Proof LED Work Light

CLN-A-EX

CE

RoHS 10

IP66G

IP67G

IP69K

Indoor Use

Mounting in All Directions

Zone 2 Zone 22


Ambient Temperature -40°C~+60°C

Daylight




CLN-24A-CD-PT-EX

Dimensions (mm)

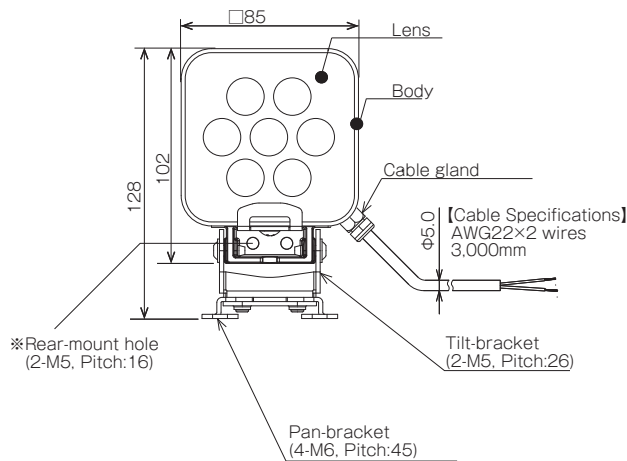

Flexible Angle Adjustment

■ Pan & Tilt (PT type)

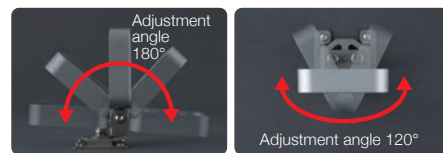

Can be tilted 180° or rotated 120° to fit any application. Can be folded to 43mm for easier installation.

Product List

Model Number	Rated Voltage	Luminous Color	Mass
CLN-24A-CD-PT-EX	24V DC	Daylight	0.43kg

Explosion Protection Standards

CE Ex II 3 G Ex nA IIC T4 Gc, II 3 D Ex tc IIC T135°C Dc

LAN / USB / PoE / Wireless

Signal Tower

Beacons

Cube Tower

Audible Alarms and MP3 Voice Annunciators

Hybrid Signaling Devices

LED Illumination

Explosion Proof

Optional Parts