

LED Work Light

CWF

CE

RoHS
10

UL

FCC

KC

IP20


Indoor
UseMounting in
All
DirectionsAmbient
Temperature
-25°C~+60°C

(DC model)

Ambient
Temperature
-20°C~+50°C

(AC model)

Daylight

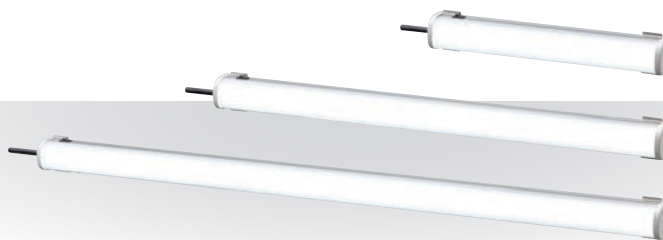

Model Number Configuration

CWF3S-24-CD

①

②

③

① Length

3 = 300mm
6 = 600mm
9 = 900mm*1

*1. AC Type only

② Rated Voltage / Standards

24 = 24V DC / UL, CE*2
M2U = 100-240V AC / UL
M2C = 100-240V AC / CE, KC


*2. CWF [3S] [6S] type only

③ Luminous Color

CD = Daylight


Dimensions (mm)

LED Work Light

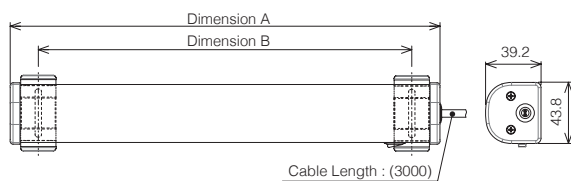

Model Number	Dimension A	Dimension B
CWF3S-□-CD	300	260
CWF6S-□-CD	600	560
CWF9S-□-CD	900	860

CWF Standard Mounting Bracket (2 pcs)

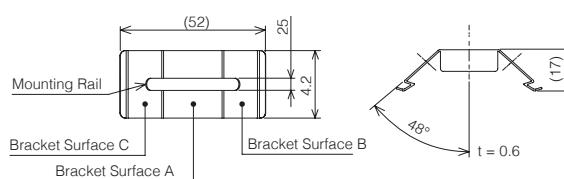

Optional Parts

For details refer to P. 99 to P. 104

Product Description	Model Number
Swivel Bracket	CWF-001
Magnetic Mounting Bracket	CWF-002

Specification

Description	Voltage Type	Length		
		300mm	600mm	900mm
Illuminance (@1m, center, typical)	DC	165lx	320lx	-
	AC	150lx	320lx	445lx

Product List

Model Number	Rated Voltage	Luminous Color	Power Consumption	Mass
CWF3S-24-CD	24V DC	Daylight	5W	0.42kg
CWF6S-24-CD	24V DC	Daylight	10W	0.57kg
CWF3S-M2U-CD	100-240V AC	Daylight	5W	0.53kg
CWF3S-M2C-CD	100-240V AC	Daylight	5W	0.46kg
CWF6S-M2U-CD	100-240V AC	Daylight	10W	0.68kg
CWF6S-M2C-CD	100-240V AC	Daylight	10W	0.6kg
CWF9S-M2U-CD	100-240V AC	Daylight	15W	0.84kg
CWF9S-M2C-CD	100-240V AC	Daylight	15W	0.75kg