



LE



Direct Mount

Pole Mount

Signal Tower



- LED**
- 2 Alarm Sounds** (FB Type)
- 85dB** at 1m
- IP54** (Pole-mount IP23)
- Ø50**
- NPN/PNP**
Open-collector

Versatile, cost and energy efficient LED Signal Tower for every need.



High visibility
from any angle

Dual Reflection
System


PATLITE's original dual reflection system with its exclusive hybrid prism-cut lens and five color LED modules, creates a bright and evenly distributed illumination.

FEATURES

- PATLITE's exclusive Prism-Cut Lens designed for enhanced visibility from any direction and distance.
- Original Dual Reflection System for enhanced light diffusion; creating bright, distinctive illumination while saving energy.
- Two built-in alarms (FB Type) with selectable sound patterns.
- Adjustable volume of up to 85dB (at 1m).
- Direct or pole mount installation.
- Color-coordinated wiring corresponding to the lens color for quick wiring and verification.
- Interchangeable Modules need no re-wiring, even after installation.
- Main body is constructed of ABS resin with superior resistance to impact and heat.
- Lens is made of superior impact resistant and light translucent AS resin.
- NPN/PNP Compatible (Except for LE 100/220V AC, compatible with NPN only).
- Available colors are in Red, Amber, Green, Blue, and Clear/White.
- Conforms to the CE requirements (for 12V, 24V type only).
- UL Recognized Components (File No. E215660) (for 12V, 24V type only).

Easy to add and remove

- When adding or removing modules, the center shaft that matches the amount of tiers has to be purchased.



Interchangeable LED Modules

Changeable color sequence: Easy to add/remove up to 5 colored modules even after installation.


Note: LED modules of the same color within a signal tower will light up simultaneously.

Wiring doesn't change

- The LED Module colors correspond to the wiring, so re-wiring is not necessary.




How to Order

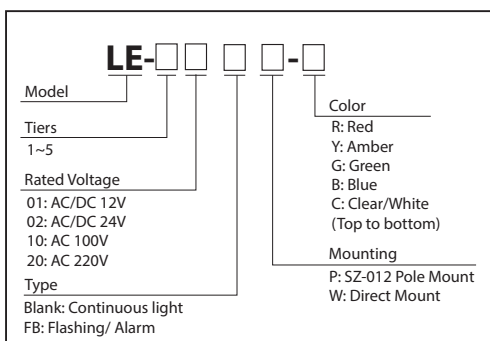


Dimensions (Unit: mm)


LE Type

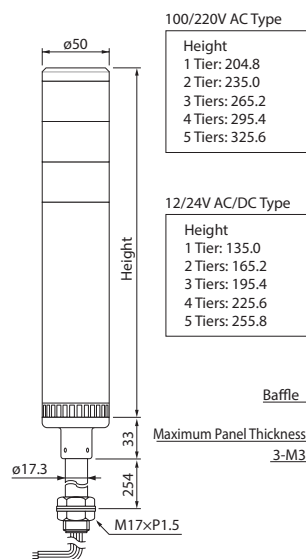


LE-FB Type



Side-Mount Bracket




Mounting Dimension



Specifications

Stack Number	Model	Rated Voltage	Power Consumption	Mass	
				(FB)P	(FB)W
1 Tier	LE-101	AC/DC 12V	1.1W	640g	260g
	LE-102	AC/DC 24V	1.6W		
	LE-110	AC 100V			
	LE-120	AC 220V	5.7W	780g	400g
2 Tiers	LE-201	AC/DC 12V	1.7W	690g	310g
	LE-202	AC/DC 24V	2.2W		
	LE-210	AC 100V			
	LE-220	AC 220V	6.7W	830g	450g
3 Tiers	LE-301	AC/DC 12V	2.2W	740g	360g
	LE-302	AC/DC 24V	2.7W		
	LE-310	AC 100V			
	LE-320	AC 220V	7.5W	880g	500g
4 Tiers	LE-401	AC/DC 12V	2.7W	790g	410g
	LE-402	AC/DC 24V	3.2W		
	LE-410	AC 100V			
	LE-420	AC 220V	8.3W	930g	550g
5 Tiers	LE-501	AC/DC 12V	3.2W	840g	460g
	LE-502	AC/DC 24V	3.7W		
	LE-510	AC 100V			
	LE-520	AC 220V	9.1W	980g	600g



Standard Mounting Bracket SZ-012



Optional Mounting Bracket SZ-021



Optional Mounting Bracket SZ-011




Optional Mounting Bracket SZ-014


Wiring

LE Model


AC/DC 24V Lighting Type

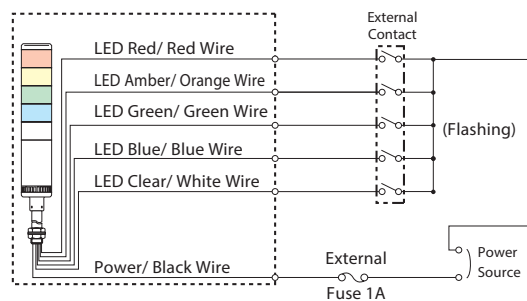


DC 24V NPN Type

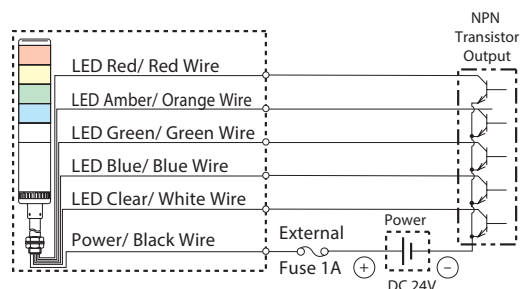

DC 24V PNP Type

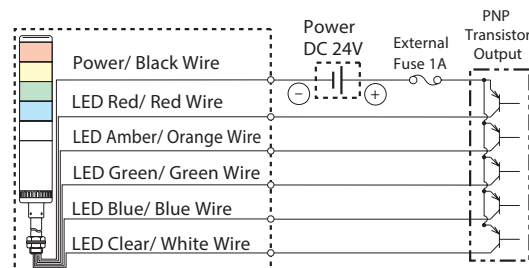


AC/DC 24V Lighting/Flashing Type

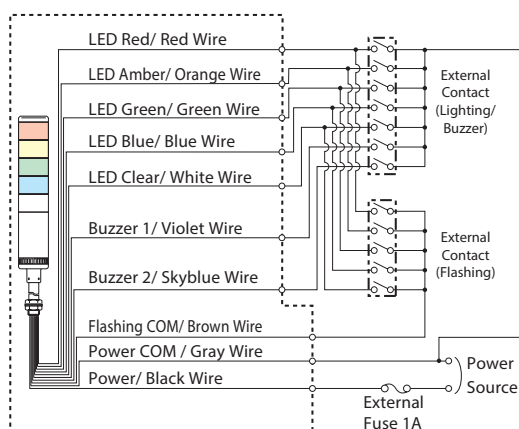


LE Model

DC 24V NPN FB Type

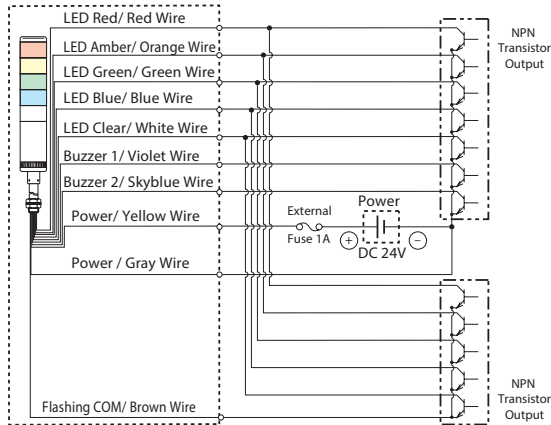

DC 24V PNP FB Type

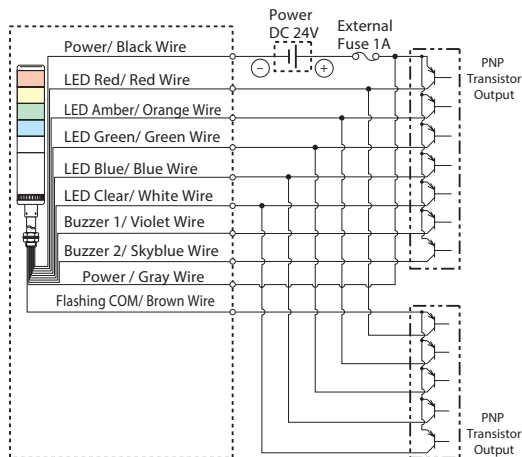

Signal Line Voltage and Current per LED Module


Voltage Type	Signal Line Voltage	LED			Alarm	
		Signal Line Current			Signal Line Current	Inrush Current
AC/DC 12V	AC/DC12V	50mA	40mA	44mA		
AC/DC24V	AC/DC 24V	25mA	20mA	22mA	40mA	150mA
AC 100V, 220V	DC 24V	25mA	20mA	22mA		

Lead-wire color coordination table


LED Unit Color	Lead Wire Color
Red	Red
Amber	Orange
Green	Green
Blue	Blue
Clear/White	White

Alarm Sounds	Lead Wire Color
Buzzer 1	Purple
Buzzer 2	Skyblue


AC Power Lighting Type

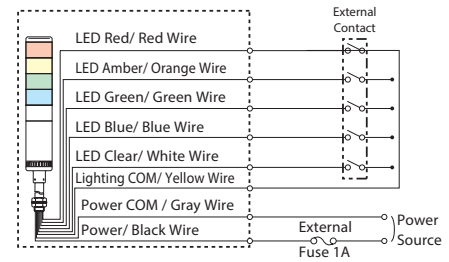

AC Power Lighting/Flashing Type

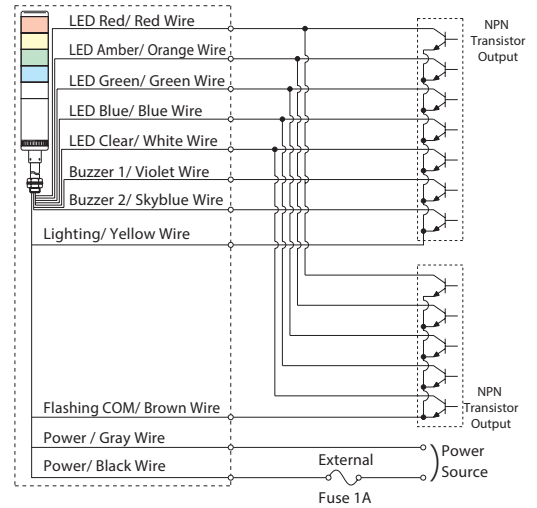

AC Power NPN Type

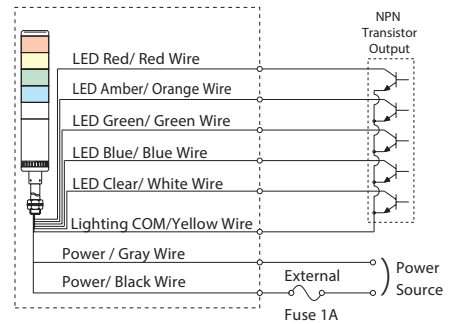

AC Power NPN FB Type

