

LFH-EX EXPLOSION-SAFE


CE  II 3GD Ex nA IIC T4 Gc, Ex tc IIIC T85°C Dc IP66 94/9/EC(ATEX)CENELEC:EN 60079-0, EN 60079-15, EN 60079-31

Indoor/Outdoor LED Warning Light


- Explosion-safe for gas and dust
- Suitable for Zone 2 and Zone 22
- Dome colors: Red, Yellow, Blue
- Triple flash, 110 +/-10 flash/minute
- Indoor/Outdoor use allows for the unit to be used in various environments such as factories, utilities, food and beverage, pharmaceutical, parking lots, and others.
- Vibration resistance of 90m/s² (9G)* can withstand the mounting on to forklifts, construction, maintenance, and other industrial vehicles.
- 1/2" NPT adaptor
- IP66 (IEC60529)
- NEMA Type 4, 4X, 13
- RoHS Directive (EN50581)
- CE
- FCC Part 15 Subpart B Class A




Dimensions

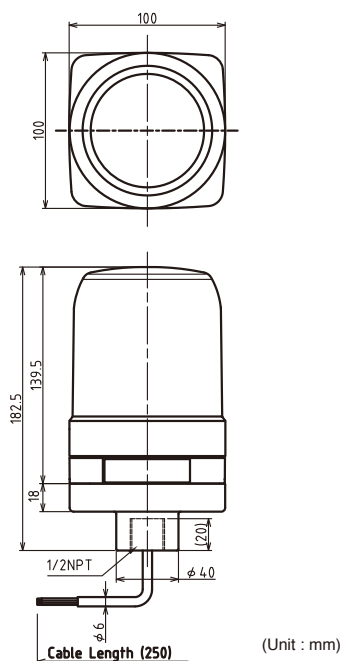

Wiring

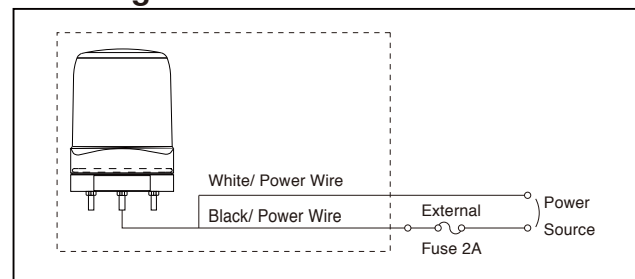

How to Order

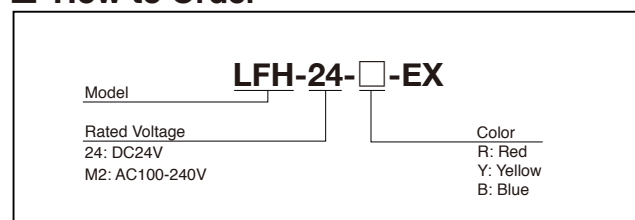

Specifications

Model	LFH-24	LFH-M2
Rated Voltage	DC 24V	AC 100V/120V/200V/230V
Operating Voltage Range	DC 20V~30V	AC 100V~240V
Operating Ambient Temperature	-22°F ~ +158°F (-30°C ~ +70°C)	-4°F ~ +140°F (-20°C ~ +60°C)
Operating Ambient Humidity	Less than 90% (No condensation)	
Mounting Location	Indoors and Outdoors	
Mounting Direction	Upright, Inverted, and Sideways (In a wet environment)	
Vibration Resistance	90 m/s ²	20 m/s ²
Protection Rating	IP66 (IEC 606529)	
Luminous Intensity	Red: more than 112cd Yellow: more than 177cd Blue: more than 52cd	
Weight (+/- 10%)	20.1oz (570g)	21.5oz (610g)

*Vibration resistance 20m/s² for the LFH-M2