

Signal Beacons

NE-A

New

Φ56 mm	CE	RoHS 10	UL	FCC	ICES	KC	IP67 (M1ANN)
IP65	NEMA TYPE 4X,13	Indoor Use	Mounting in All Directions	Ambient Temperature -30°C~+50°C	Ambient Temperature -25°C~+60°C	Red, Amber, Green, Blue, White, Multi-color: 7 colors	Continuous On
Flashing M1AN	88dB	2 Alarm Sounds	Touch Sensor M1ATB	NE-24A NE-M1A			
				*1. NE-M1A only			



Single Color



Y: Amber G: Green



B: Blue C: White



Multi-Color



Multi-Color / Buzzer / Touch Sensor

Model Number Configuration

NE-24A-R

① ②

① Rated Voltage
24 = 24V DC

② Color
R = Red B = Blue
Y = Amber C = White
G = Green

NE-M1ATB-M

① ② ③ ④


① Rated Voltage
M1 = 12 - 24V DC

② Touch sensor
T = Touch sensor
N = No touch sensor


③ Buzzer
B = Buzzer
N = No Buzzer

④ Color
M = Multi-color


Dimensions (mm)




A Cable exit hole (Ø16)
With cable gland (φ26)



B Mounting screw holes (2-Ø4.5)
M4 screws
(Tightening torque : 0.6N · m)

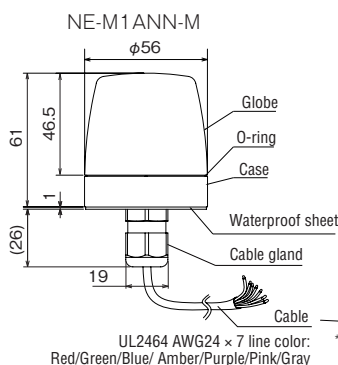

UL2464 AWG24 × 7 line color:
Red/Green/Blue/ Amber/Purple/Pink/Gray



* Cable length: (2090)

Product List

Model Number	Rated Voltage	Touch Sensor	Alarm	Luminous Color	Power Consumption	Mass
NE-24A-R	24V DC	None	None	Red	0.7W	0.06kg
NE-24A-Y	24V DC	None	None	Amber	0.7W	0.06kg
NE-24A-G	24V DC	None	None	Green	0.7W	0.06kg
NE-24A-B	24V DC	None	None	Blue	0.7W	0.06kg
NE-24A-C	24V DC	None	None	White	0.7W	0.06kg
NE-M1ANN-M	12 - 24V DC	None	None	Multi-color (7 colors)	1.2W	0.15kg
NE-M1ANB-M	12 - 24V DC	None	Yes	Multi-color (7 colors)	1.8W	0.17kg
NE-M1ATB-M	12 - 24V DC	Yes	Yes	Multi-color (7 colors)	1.8W	0.17kg

Specification

Supported Transistors	24 : NPN/PNP, M1 : NPN
Alarm Sound	2 sounds (Intermittent, continuous)
Volume Control	None

Optional Parts

For details refer to P. 99 to P. 104

Product Description	Model Number
Pole bracket	NE-001D
Wall mounting bracket	NE-002D