

INSTALLATION **INSTRUCTIONS**

Models BC380 and PB750

INTRODUCTION

Thank you for purchasing the OCEAN BREEZE Evaporative Mist Cooling System. Please take the time to read through the enclosed instructions and follow them step by step.

If you have any questions, please call our customer service line at


1-800-344-2281, or visit us at www.digcorp.com. You may also e-mail at: dig@digcorp.com.

By increasing the moisture content in the surrounding air, the Ocean Breeze Evaporative Mist Cooling System can dramatically reduce the air temperature. The hotter and drier the air, the more noticeable the cooling effect.

To create your own microclimate, follow these step by step instructions, then sit back and enjoy the cooling comfort of an Ocean Breeze.

INSTALLATION

1. Place screen in 3/4 in. swivel faucet connector and attach to your water source.

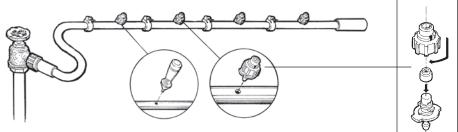

- 2. Insert the end of the misting line into the faucet connector for about 1/2 in. to 5/8 in. by pushing inward and applying some force.
- 3. At the location where you want to place the first mister, use the punch tool to create a hole in your misting line. Push the barbed end of your mister into the hole. Continue on and use the same method to install each of your remaining misters 2 ft, to 4 ft, apart, at a 90° to 120° angle to the ground.
- 4. Use "C" clamps on each side of the mister to secure the line to the structure (see illustration).
- Turn the water on to flush the line and then use the line end to close the end of the misting line. 5.
- 6. The line connector will allow you to add more misting line to expand your system as needed.

Specifications:

Maximum working pressure: 80 PSI

Maximum number of misters spaced 3 feet apart at 70 PSI: 70

Maximum number of misters spaced 3 feet apart at 50 PSI: 45



Vista, CA 92081 USA

- Contains: • 10 – Easy-to-clean
- Misting Nozzles
 - 1 Punch

www.digcorp.com

26-003 REVB 061915

e-mail: dig@digcorp.com

- 1 Faucet connector
- 1 Screen



INSTALLATION **INSTRUCTIONS**

Models BC380 and PB750 INTRODUCTION

Thank you for purchasing the OCEAN BREEZE Evaporative Mist Cooling System. Please take the time to read through the enclosed instructions and follow them step by step.

If you have any questions, please call our customer service line at


1-800-344-2281, or visit us at www.digcorp.com. You may also e-mail at: dig@digcorp.com.

By increasing the moisture content in the surrounding air, the Ocean Breeze Evaporative Mist Cooling System can dramatically reduce the air temperature. The hotter and drier the air, the more noticeable the cooling effect.

To create your own microclimate, follow these step by step instructions, then sit back and enjoy the cooling comfort of an Ocean Breeze.

INSTALLATION

1. Place screen in 3/4 in. swivel faucet connector and attach to your water source.

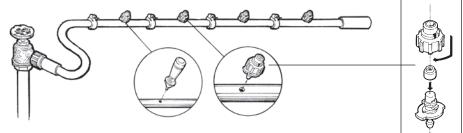

- 2. Insert the end of the misting line into the faucet connector for about 1/2 in. to 5/8 in. by pushing inward and applying some force.
- 3. At the location where you want to place the first mister, use the punch tool to create a hole in your misting line. Push the barbed end of your mister into the hole. Continue on and use the same method to install each of your remaining misters 2 ft, to 4 ft, apart, at a 90° to 120° angle to the ground.
- 4. Use "C" clamps on each side of the mister to secure the line to the structure (see illustration).
- 5. Turn the water on to flush the line and then use the line end to close the end of the misting line.
- 6. The line connector will allow you to add more misting line to expand your system as needed.

Specifications:

Maximum working pressure: 80 PSI Maximum number of misters spaced 3 feet apart

at 70 PSI: 70

Contains: • 10 - Easy-to-clean

• 1 – Screen

Misting Nozzles

- 1 Straight connector • 1 – I ine end
 - 1 Punch

• 15 – "C" Clamps

• 50 ft. - 3/8 in. line Complete Instructions 1 – Faucet connector

Maximum number of misters spaced 3 feet apart at 50 PSI: 45



1210 Activity Drive Vista, CA 92081 USA



Complete Instructions

A

• 15 – "C" Clamps

• 1 – I ine end

• 1 - Straight connector

• 50 ft. - 3/8 in. line