

Comenda's heavy duty AC2 compact rack conveyor dishwashers are compact while offering reliability, durability and delivering the best in technological evolution.

AC2 dishwashers have an output of 100 racks per hour up to 150 racks per hour using the P5 Prewash zone. Deep drawn tank, self-draining pump and raised feet guarantee maximum hygiene while the support structure, durable mechanics and construction details provide high quality safety features.

**STANDARD FEATURES**

- Electro mechanical control panel at the top of machine
- Self draining vertical wash pump
- Door wipe seal for constant cleaning inside
- Stainless steel filters, rinse column and tank fill spout
- Deep drawn wash tank with rounded corners
- Durable stainless steel wash and self supporting stainless rinse arms
- Insulated double walled door with integral balancing springs
- EOR - Emergency Override (key activated to bypass circuit board)
- 3 x peg racks, 1 x latware rack, 1 x cutlery container
- Autotimer - reduces consumption by stopping pumps when there are no racks entering the dishwasher, restarts automatically when racks are loaded
- Automatic Proportional Rinse System (APRS)

**OPTIONS**

- Entry and Exit splash shields with collar
- Dryer
- Heat Recovery
- Heat Pump
- Drain pumps
- Pre Wash Zone 500mm
- Proportional Rinse System (PRS)
- Rinse Aid Homogeniser (RAH)
- DHM Pre-scraping system
- Midwash Plus (MWP)

**INDUSTRY  
KITCHENS**



[www.industrykitchens.com.au](http://www.industrykitchens.com.au) 1800 611 058

**AC2-HDLR**

**HD LINE HEAVY DUTY  
COMPACT RACK CONVEYOR DISHWASHER**



Connections:  
a: tanks drain  
b: water inlet  
c: electrical connection

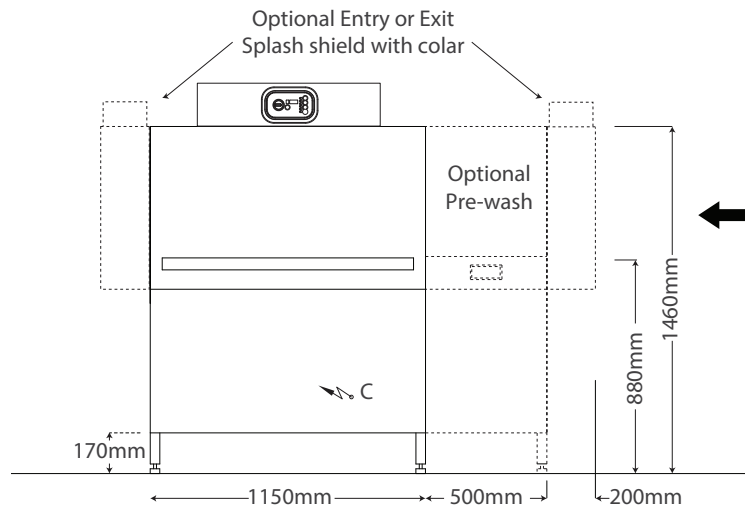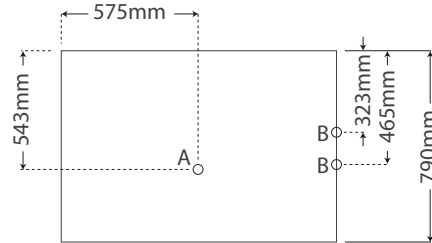

DIMENSIONS	
Dishwasher:	1150W x 795D x 1660H mm
Clearance:	430 mm
Rack size:	500mm x 500mm
WASH CYCLE	
AC2HD:	70/100 racks per hour
AC2HD-P5:	100/150 racks per hour
POWER SUPPLY	
AC2HD:	415V 3N 50Hz 32A - three phase (not plugged)
AC2HD-P5:	415V 3N 50Hz 40A - three phase (not plugged)
TECHNICAL DATA	
Energy Consumption:	
AC2HD:	19.04kW
AC2HD-P5:	23.74kW
Water Temp. Supply:	45°-55°C
Water Connection:	2-4 bar, 3/4"
Tanks Drain:	50mm
Wash Cycle:	70/100 racks per hour
Tanks Drain:	50mm
Water Consumption (with PRS / without PRS) :	150/220 litres / per hr

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.



**National Head Office**  
156 Swann Drive  
Derrimut VIC 3026  
Tel: +61 3 8369 4600  
Fax: +61 3 8369 4699  
[www.comcater.com.au](http://www.comcater.com.au)

**Melbourne**  
96-100 Tope Street  
South Melbourne VIC 3205  
Tel: +61 3 8699 1200  
Fax: +61 3 8699 1299

**Sydney**  
20/4 Avenue of the Americas  
Newington, NSW 2127  
Tel: +61 2 8775 9500  
Fax: +61 2 9648 4762

**Brisbane**  
46-60 Dunhill Crescent  
Morningside QLD 4170  
Tel: +61 7 3900 2700

**Perth**  
Unit 16, 7 Abrams Street  
Balcatta, WA 6021  
Tel: +61 8 6217 0700  
Fax: +61 8 6217 0799